

REVISIONS

Ⓐ REVISED MERV RATING, WAS 8
GAC 22MAY2020 - GC 22MAY2020 - SH 22MAY2020

AAF PART NUMBER	NOMINAL SIZE		ACTUAL SIZE		RATED AIRFLOW (CFM)	PLEATS PER LINEAL FOOT	RATED INITIAL RESISTANCE @ 500 FPM (in. W.G.)	RECOMMENDED FINAL RESISTANCE (in. W.G.)	ASHRAE 52.2 MERV	CONTINUOUS OPERATING TEMPERATURE LIMITS		FILTERS PER CARTON
	W	H	W	H						DEG F	DEG C	
148-802-314	12	20	11 1/2	19 1/2	850	14.0	0.22	1.0	9	200	93	12
148-802-319	12	24	11 3/8	23 3/8	1000							
148-802-375	14	25	13 1/2	24 1/2	1200							
148-802-400	15	20	14 1/2	19 1/2	1050							
148-802-448	16	16	15 1/2	15 1/2	900							
148-802-500	16	20	15 1/2	19 1/2	1100							
148-802-524	16	24	15 3/8	23 3/8	1350							
148-802-600	16	25	15 1/2	24 1/2	1400							
148-802-635	18	24	17 3/8	23 3/8	1500							
148-802-631	18	25	17 1/2	24 1/2	1550							
148-802-700	20	20	19 1/2	19 1/2	1400							
148-802-782	20	24	19 3/8	23 3/8	1650							
148-802-800	20	25	19 1/2	24 1/2	1750							
148-802-863	24	24	23 3/8	23 3/8	2000							
148-802-870	25	25	24 1/2	24 1/2	2150							
												6

FRAME:
HIGH WET STRENGTH BEVERAGE BOARD

MEDIA:
100% SYNTHETIC FIBER UNIFORM MEDIA
WITH CONTROLLED FIBER SIZE AND BLEND


METAL BACKING:
HEAVY-DUTY, GALVANIZED EXPANDED METAL

ASSEMBLY ADHESIVE:
MOISTURE-RESISTANT

UL 900 CLASSIFIED

TOLERANCES:
DEPTH: ±1/16"

HEIGHT AND WIDTH: ±1/8"

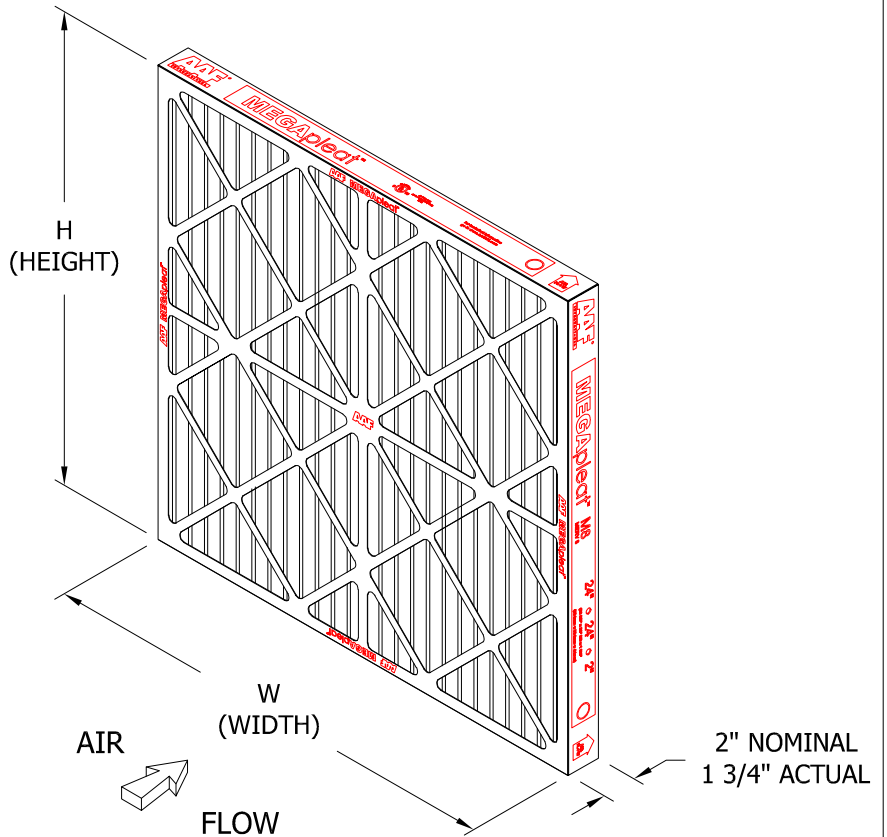

FORM I297 REV. 5/00

DRAWN GAC	DATE 24OCT12	CHECKED GC	DATE 24OCT12	APPR. RDL	DATE 24OCT12	SUPERSEDES
--------------	-----------------	---------------	-----------------	--------------	-----------------	------------



P.O. Box 35690
Louisville, KY.
40232-5690
www.aafintl.com

FILTER ASSEMBLY,
2" MEGApleat M9

DRAWING NO.	REV
3100453	A
SHEET 1	OF 1