

AIRREX[®]

PORTABLE CLIMATE SOLUTIONS

www.tempairsales.com



HEPHZIBAH[®]

SINCE 1986

AIRREX PRODUCT LINE UP

AHSC-14R HEATPUMP & DEHUMIDIFICATION

Features

- ☐ 13,600 Btu/h Cooling
- ☐ 13,000 Btu/h Heating
- ☐ 115 V, 1 Ph
 - Cool : 11.6 A
 - Heat : 10.4 A
- ☐ Operating Range
 - Cool : 59-118°F
 - Heat : 46-81°F
 - Dehu : 55-115°F
- ☐ Cold Air Louver
- ☐ 12" Exhaust
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 500 sq. ft.
- ☐ Optional Condensate Pump
- ☐ Optional HEPA filter + Bracket (HEPA + Micron) (HEPA + Active carbon)



AHSC-18R HEATPUMP & DEHUMIDIFICATION

Features

- ☐ 16,800 Btu/h Cooling
- ☐ 16,800 Btu/h Heating
- ☐ 115 V, 1 Ph
 - Cool : 15.3 A
 - Heat : 13.6 A
- ☐ Operating Range
 - Cool : 59-118°F
 - Heat : 46-81°F
 - Dehu : 55-115°F
- ☐ Cold Air Louver
- ☐ 12" Exhaust
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 600 sq. ft.
- ☐ Optional Condensate Pump
- ☐ Optional HEPA filter + Bracket (HEPA + Micron) (HEPA + Active carbon)



HSC-12R AIR COOLED & DEHUMIDIFICATION

Features

- ☐ 12,000 Btu/h Cooling
- ☐ 115 V, 1 Ph, 11.4 A
- ☐ Operating Range
 - Cool : 68-113°F
 - Dehu : 59-113°F
- ☐ 5" Cold Air Nozzle
- ☐ 12" Exhaust
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 400 sq. ft.
- ☐ Optional Condensate Pump



HSC-14R AIR COOLED & DEHUMIDIFICATION

Features

- ☐ 13,600 Btu/h Cooling
- ☐ 115 V, 1 Ph, 11.8 A
- ☐ Operating Range
 - Cool : 59-118°F
 - Dehu : 55-115°F
- ☐ (2) 5" Cold Air Nozzles
- ☐ 12" Exhaust
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 500 sq. ft.
- ☐ Optional Condensate Pump
- ☐ Optional HEPA filter + Bracket (HEPA + Micron) (HEPA + Active carbon)



HSC-18R AIR COOLED & DEHUMIDIFICATION

Features

- ☐ 16,800 Btu/h Cooling
- ☐ 115 V, 1 Ph, 15.0 A
- ☐ Operating Range
 - Cool : 59-118°F
 - Dehu : 55-115°F
- ☐ (2) 5" Cold Air Nozzles
- ☐ 12" Exhaust
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 600 sq. ft.
- ☐ Optional Condensate Pump
- ☐ Optional HEPA filter + Bracket (HEPA + Micron) (HEPA + Active carbon)



HSC-24R AIR COOLED & DEHUMIDIFICATION

Features

- ☐ 23,500 Btu/h Cooling
- ☐ 220 V, 1 Ph, 12.8 A
- ☐ Operating Range
 - Cool : 65-118°F
 - Dehu : 55-115°F
- ☐ (2) 5" Cold Air Nozzles
- ☐ 12" Exhaust
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 800 sq. ft.
- ☐ Optional Condensate Pump
- ☐ Optional HEPA filter + Bracket (HEPA + Micron) (HEPA + Active carbon)



HSC-36R AIR COOLED & DEHUMIDIFICATION

Features

- ☐ 36,000 Btu/h Cooling
- ☐ 220 V, 1 Ph, 19.4 A
- ☐ Operating Range
 - Cool : 68-115°F
 - Dehu : 64-115°F
- ☐ (2) 8" Cold Air Nozzles
- ☐ 16" Exhaust
- ☐ Includes Condensate Pump
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 1,200 sq. ft.
- ☐ Optional HEPA filter + Bracket
 - (HEPA + Micron)
 - (HEPA + Active carbon)



HSC-60R AIR COOLED & DEHUMIDIFICATION

Features

- ☐ 60,000 Btu/h Cooling
- ☐ 220 V, 1 Ph, 27.3 A
- ☐ 220 V, 3 Ph, 18.5 A
- ☐ 460 V, 3 Ph, 8.87 A
- ☐ Operating Range
 - Cool : 65-118°F
 - Dehu : 59-118°F
- ☐ (2) 8" Cold Air Nozzles
- ☐ 16" Exhaust
- ☐ Includes Condensate Pump
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 2,000 sq. ft.
- ☐ Optional HEPA filter + Bracket
 - (HEPA + Micron)
 - (HEPA + Active carbon)



HWC-19R WATER COOLED & DEHUMIDIFICATION

Features

- ☐ 18,200 Btu/h Cooling
- ☐ 115 V, 1 Ph, 11.7 A
- ☐ Operating Range
 - Cool : 65-118°F
 - Dehu : 65-118°F
- ☐ (2) 5" Cold Air Nozzles
- ☐ Includes Condensate Pump
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 600 sq. ft.
- ☐ Optional quick connector hose kit



HWC-60R WATER COOLED & DEHUMIDIFICATION

Features

- ☐ 61,000 Btu/h Cooling
- ☐ 220 V, 1 Ph, 20 A
- ☐ Operating Range
 - Cool : 65-104°F
 - Dehu : 65-104°F
- ☐ Cold Air Louver
- ☐ Includes Condensate Pump
- ☐ Spot and Room Settings
- ☐ R-454B
- ☐ Covers up to 2,000 sq. ft.
- ☐ Optional HEPA filter + Bracket
 - (HEPA + Micron)
 - (HEPA + Active carbon)
- ☐ Optional (2) 8" Cold Air Nozzles
- ☐ Optional quick connector hose kit




HEPA-2000P PORTABLE AIR SCRUBBER


Features

- ☐ 1,950 CFM
- ☐ 115 V, 1 Ph, 8.8 A
- ☐ Covers up to 2,000 sq. ft.
- ☐ 3 Stage Filtration
- ☐ Removes up to 99.97% Airborne Particles

Indoor Use

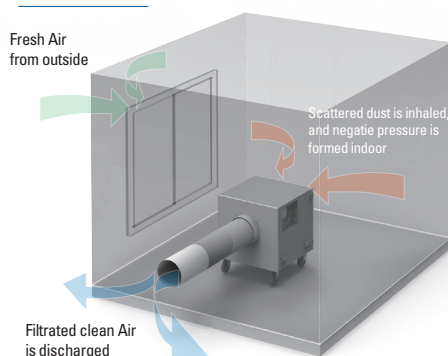

Outdoor Use

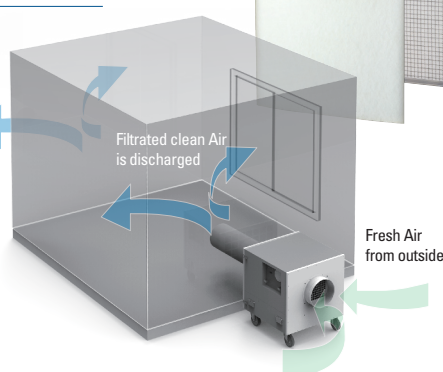

- ① 1st Pre-Filter
- ② 2nd Pre-Filter
- ③ HEPA Filter
- ④ Carbon Filter 24" x 24" x 2"

(Optional)




* Carbon Filter can be used instead of 2nd Pre-Filter

AIRREX PRODUCT LINE UP

ADH-8000R PORTABLE DEHUMIDIFIER for flood restoration

Features

- 25.4 gal/day(Max) 15.9 gal/day(Nominal)
- 115 V, 1 Ph, 10.25 A
- Operating 34°F ~ 86°F (~ 90%)
87.8°F ~ 100.4°F (~ 60%)
- 1.17 kW/h
- 60 dB
- R-454B

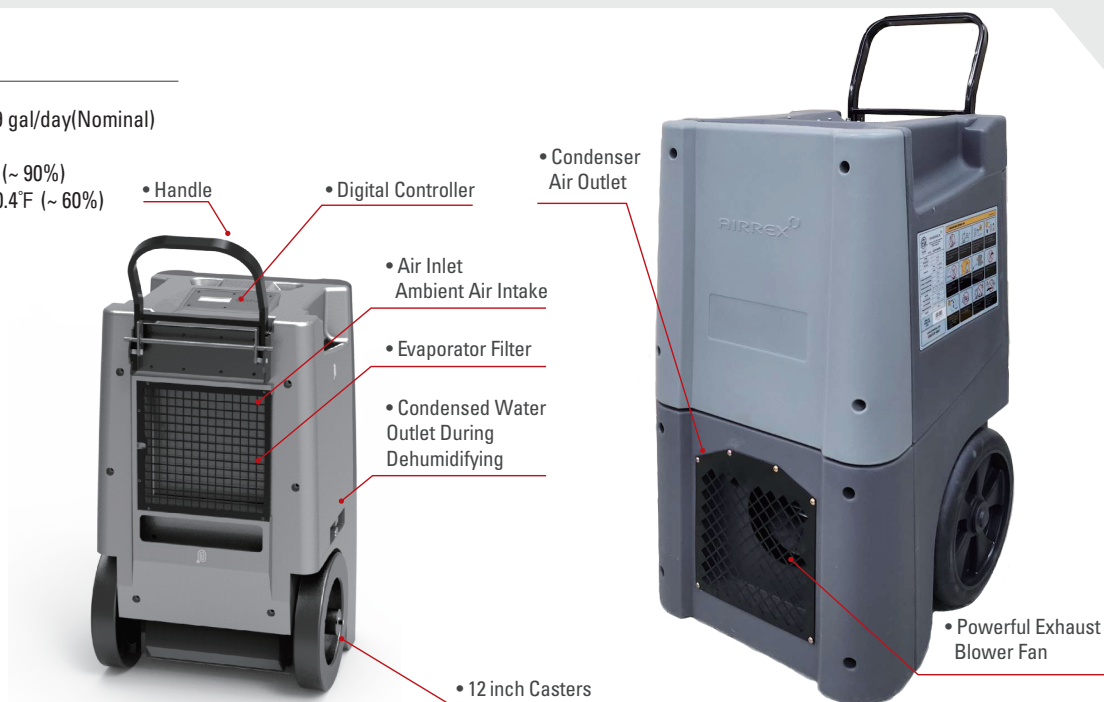

AF-2300P AXIAL TURBO FAN

Features

- High: 1.4 A / Low: 1.13 A
- 115 V, 1 Ph
- 16 inch Dia. / 7 blade / Integral
- High: 62.5 dB / Low: 54.2 dB
- 25.4 lbs
- High: 1,932 CFM
- Low: 1,417 CFM



• Pairing the Airrex AF-2300P



• ADH-8000R is the perfect solution for flood restoration.



AHSC-42R HEATPUMP & DEHUMIDIFICATION

Features

- ☐ 42,000 Btu/h Cooling
- ☐ 47,000 Btu/h Heating
- ☐ 220 V, 1 Ph
 - Cool : 21 A
 - Heat : 23.6 A
- ☐ Operating Range
 - Cool : 65-118°F
 - Heat : 50-81°F
 - Dehu : 59-118°F
- ☐ (1) 16" Supply
- ☐ (1) 16" Return
- ☐ R-454B
- ☐ Covers up to 1,400 sq. ft.
- ☐ Outdoor and Indoor Use
- ☐ Optional external condensate pump
- ☐ Optional top exhaust reducer
- ☐ Optional(2) 16"x 25' flexible
- ☐ Optional(1) 20"x 25' flexible



AHSC-60R HEATPUMP & DEHUMIDIFICATION

Features

- ☐ 60,000 Btu/h Cooling
- ☐ 60,000 Btu/h Heating
- ☐ 220 V, 1 Ph
 - Cool : 26 A
 - Heat : 25.8 A
- ☐ Operating Range
 - Cool : 65-118°F
 - Heat : 50-81°F
 - Dehu : 59-118°F
- ☐ (1) 16" Supply
- ☐ (1) 16" Return
- ☐ R-454B
- ☐ Covers up to 2,000 sq. ft.
- ☐ Outdoor and Indoor Use
- ☐ 460 V, 3 Ph
 - Cool : 8.3 A
 - Heat : 8.8 A
- ☐ Optional external condensate pump
- ☐ Optional top exhaust reducer
- ☐ Optional(2) 16"x 25' flexible
- ☐ Optional(1) 20"x 25' flexible



AHSC-140R PORTABLE AIR CONDITIONER WITH ELECTRIC HEAT

Features

- ☐ 145,000 Btu/h Cooling
- ☐ 100,000 Btu/h Heating
- ☐ 220 V, 3 Ph
 - Cool : 65.1 A
 - Heat : 81.5 A
- ☐ Operating Range
 - Cool : 65-113°F
 - Heat : 1-81°F
 - Dehu : 59-113°F
- ☐ (2) 16" Supply
- ☐ (2) 16" Return
- ☐ 20" Exhaust
- ☐ R-454B
- ☐ Covers up to 4,800 sq. ft.
- ☐ Outdoor and Indoor Use
- ☐ Included Condensate Pump
- ☐ 460 V, 3 Ph
 - Cool : 20.6 A
 - Heat : 31.7 A
- ☐ Optional(4) 16"x 25' flexible
- ☐ Optional(1) 20"x 25' flexible



AIRREX PRODUCT LINE UP



SPECIFICATIONS				Water-Cooled			
				HWC-19R	HWC-60R	HSC-12R	HSC-14R
Capacity	Cooling	(35°C/95°F 40%)	Btu/h	18,200	61,000	12,000	13,600
	Heating	(21°C/70°F 50%)	Btu/h	-	-	-	-
	Dehumidification	Max. (32°C/89°F 80%)	gal/day	13	92.4	19.1	26
		Nominal (27°C/80°F 60%)	gal/day	9	52	12	14.4
Electrical Characteristics	Voltage	60 Hz	Volts	1 Ph, 115 V	1 Ph, 220 V	1 Ph, 115 V	1 Ph, 115 V
	Power Consumption	Cooling	kW	1.24	4.4	1.26	1.28
		Heating	kW	-	-	-	-
	Current Consumption	Cooling	A	11.9	20	11.4	11.8
		Heating	A	-	-	-	-
	Circuit Breaker Size		A	15	30	15	15
Power Cord	Min. - Max. Voltage		V	98 - 127	187 - 242	98 - 127	98 - 127
	NEMA Plug		-	5-15	-	5-15	5-15
	Gauge		-	14 AWG (3-core)	-	14 AWG (3-core)	14 AWG (3-core)
Fans	Indoor	Fan Type	-	Centrifugal	Centrifugal	Centrifugal	Centrifugal
		Cooling Air Volume (High/Low)	CFM	520 / 450	2,000	400 / 360	420 / 370
		Heating Air Volume	CFM	-	-	-	-
		Dehu Air Volume	CFM	450	2,000	320	390
		Max. External Static Pressure	inchH2O	0.35	0.7	0.3	0.3
		Max. Equivalent Duct Length	ft	40	50	30	30
		Type / Size	inch	Duct / 5" (Φ125) x 2	LOUVER	Duct / 5" (Φ125) x 1	Duct / 5" (Φ125) x 2
	Outdoor	Fan Type	-	-	-	Axial	Centrifugal
		Air Volume (High/Low)	CFM	-	-	680	870 / 810
		Max. External Static Pressure	inchH2O	-	-	0.15	0.25
		Max. Equivalent Duct Length	ft	-	-	30	60
		Type / Size	inch	-	-	Top Flange / 12" (Φ300)	Top Flange / 12" (Φ300)
Sound Level	With Exhaust Duct	High / Low	dB(A)	-	-	55 / 54	56 / 53
	Without Exhaust Duct	High / Low	dB(A)	56 / 55	62	57 / 55	58 / 55
Air Filter	Type	Indoor	-	Alu+SUS Mesh	Alu+SUS Mesh	Vinyl Chloride	Alu+SUS Mesh
		Outdoor	-	-	-	Vinyl Chloride	Alu+SUS Mesh
Condensate	Tank	Capacity	gal	-	-	4	5
	Auto Pump		-	Included	Included	Optional	Optional
Refrigerant	Type		-	R-454B	R-454B	R-454B	R-454B
			lbs	1.1 (500g)	(1700g)	1.32 (600g)	1.99 (900g)
Weight	Net Weight		lbs	163	441	129	172
Dimensions	W x D x H		inch	18 x 23 x 43	29 x 30 x 57	17 x 25 x 42	22 x 25 x 49
Operating Conditions	Min. - Max.	Cooling	°F	65~118 (18~46°C)	65~104 (18~40°C)	68~113 (20~45°C)	59~118 (15~48°C)
		Heating	°F	-	-	-	-
		Dehumidification	°F	65~118 (18~46°C)	65~104 (18~40°C)	59~113 (15~45°C)	55~115 (13~46°C)
Safety Device	High Pressure Switch			○	○	-	○
	Low Pressure Switch			○	○	○	○
	Compressor 3min. Delay Timer			○	○	○	○
	Thermostat Protector for Compressor			○	○	○	○
	Fan Motor Protection			○	○	○	○
	Automatic Full Tank Shut-Off			-	○	○	○
	Tank Position Detector			-	-	○	○



Air-Cooled						Heat Pump	
HSC-18R	HSC-24R	HSC-36R	HSC-60R			AHSC-14R	AHSC-18R
			220/1	220/3	460/3		
16,800	23,500	36,000	60,000	60,000	60,000	13,600	16,800
-	-	-	-	-	-	13,000	16,800
31.5	41.8	47.9	88.8	88.8	88.8	24	28
18	24.2	33.8	62.6	62.6	62.6	15	18
1 Ph, 115 V	1 Ph, 220 V	1 Ph, 220 V	1 Ph, 220 V	3 Ph, 220 V	3 Ph, 460 V	1 Ph, 115 V	1 Ph, 115 V
1.62	2.72	4.18	5.92	5.98	5.76	1.25	1.65
-	-	-	-	-	-	1.13	1.46
15.0	12.8	19.4	27.3	18.5	8.87	11.6	15.3
-	-	-	-	-	-	10.4	13.6
20	20	30	50	30	15	15	20
98 - 127	187 - 242	187 - 242	187 - 242	187 - 242	391 - 506	98 - 127	98 - 127
5-20	6-20	6-30	-	-	-	5-15	5-20
12 AWG (3-core)	12 AWG (3-core)	12 AWG (3-core)	-	-	-	14 AWG (3-core)	12 AWG (3-core)
10	10	10	-	-	-	10	10
Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal
440 / 380	460 / 410	1,040	1,850	1,850	1,850	440 / 390	520 / 440
-	-	-	-	-	-	370	420
400	430	1,040	1,850	1,850	1,850	410	460
0.3	0.35	0.6	0.7	0.7	0.7	0.3	0.3
30	40	40	50	50	50	30	30
Duct / 5" (Φ125) x 2	Duct / 5" (Φ125) x 2	Duct / 8" (Φ200) x 2	Duct / 8" (Φ200) x 2	Duct / 8" (Φ200) x 2	Duct / 8" (Φ200) x 2	Louver	Louver
Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal
920 / 850	1,100 / 970	1,760	3,020	3,020	3,020	820 / 750	870 / 810
0.25	0.33	0.7	0.7	0.7	0.7	0.25	0.25
60	70	70	70	70	70	60	60
Top Flange / 12" (Φ300)	Top Flange / 12" (Φ300)	Top Flange / 16" (Φ400)	Top Flange / 16" (Φ400)	Top Flange / 16" (Φ400)	Top Flange / 16" (Φ400)	Top Flange / 12" (Φ300)	Top Flange / 12" (Φ300)
58 / 56	60 / 58	65	63	63	63	57 / 54	59 / 57
59 / 57	62 / 60	68	65	65	65	59 / 55	61 / 58
Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh
Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh
5	5	-	-	-	-	5	5
Optional	Optional	Included	Included	Included	Included	Optional	Optional
R-454B	R-454B	R-454B	R-454B	R-454B	R-454B	R-454B	R-454B
2.32 (1,050g)	2.54 (1,150g)	5.07 (2,300g)	(3,800g)	(3,800g)	(3,800g)	2.1 (950g)	2.43 (1,100g)
175	187	452	628	628	628	176	178
22 x 25 x 49	22 x 25 x 49	29 x 38 x 57	29 x 54 x 57	29 x 54 x 57	29 x 54 x 57	22 x 25 x 49	22 x 25 x 49
59~118 (15~48℃)	65~118 (18~48℃)	68~115 (20~46℃)	65~118 (18~48℃)	65~118 (18~48℃)	65~118 (18~48℃)	59~118 (15~48℃)	59~118 (15~48℃)
-	-	-	-	-	-	46~81 (8~27℃)	46~81 (8~27℃)
55~115 (13~46℃)	55~115 (13~46℃)	64~115 (18~46℃)	59~118 (15~48℃)	59~118 (15~48℃)	59~118 (15~48℃)	55~115 (13~46℃)	55~115 (13~46℃)
○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○
○	○	-	-	-	-	○	○

AIRREX PRODUCT LINE UP



SPECIFICATIONS				Heat Pump			Air-Cooled with electric heat	
				AHSC-42R	AHSC-60R		AHSC-140R	
					220/1	460/3	220/3	460/3
Capacity Rating Condition	Cooling	(35°C/95°F 40%)	Btu/h	42,000	60,000	60,000	145,000	145,000
	Heating	(21°C/70°F 50%)	Btu/h	47,000	60,000	60,000	100,000	100,000
	Dehumidification	Max. (32°C/89°F 80%)	gal/day	68	76	76	203	192
		Nominal (27°C/80°F 60%)	gal/day	51	54	54	110	93
Electrical Characteristics	Voltage	60 Hz	Volts	1 Ph, 220 V	1 Ph, 220 V	3 Ph, 460 V	3 Ph, 220 V	3 Ph, 460 V
	Power Consumption	Cooling	kW	4.5	5.68	5.3	21.5	20.6
		Heating	kW	5.1	5.6	5.7	31.0	31.7
	Current Consumption	Cooling	A	21.0	26.0	8.3	65.1	31.0
		Heating	A	23.6	25.8	8.8	81.5	40
	Circuit Breaker		A	50	50	30	110	60
Power Cord	Min. - Max. Voltage		V	187 - 242	187 - 242	391 - 506	187 - 242	391 - 506
	NEMA Plug		-	-	-	-	Cam Lock	Cam Lock
	Gauge		-	-	-	-	-	-
Fans	Indoor	Fan Type	-	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal
		Cooling Air Volume (High/Low)	CFM	1,550	1,950	1,950	4,800	4,800
		Heating Air Volume	CFM	1,550	1,950	1,950	4,800	4,800
		Dehu Air Volume	CFM	1,550	1,950	1,950	4,800	4,800
		Max. External Static Pressure	inchH2O	0.7	0.9	0.9	1.2	1.2
		Max. Equivalent Duct Length	ft	50	65	65	100	100
		Type / Size	inch	1 Supply / 16" (Φ400) x 1 Return / 16" (Φ400) x 1			2 Supply / 16" (Φ400) x 2 Return / 16" (Φ400) x 2	
	Outdoor	Fan Type	-	Axial	Axial	Axial	Centrifugal	Centrifugal
		Air Volume (High/Low)	CFM	2,580	3,240	3,240	7,000	7,000
		Max. External Static Pressure	inchH2O	-	-	-	1.2	1.2
		Max. Equivalent Duct Length	ft	-	-	-	120	120
		Type / Size	inch	-	-	-	Duct / 20" (Φ500) x 1	Duct / 20" (Φ500) x 1
Sound Level	With Exhaust Duct	High / Low	dB(A)	-	-	-	77	77
	Without Exhaust Duct	High / Low	dB(A)	67	76	76	81	81
Air Filter	Type	Indoor	-	Alu+SUS Mesh	Alu+SUS Mesh	Alu+SUS Mesh	Paper filter (inch 20 x 24 x 2) x 2	
		Outdoor	-	-	-	-	-	-
Condensate	Tank	Capacity	gal	-	-	-	-	-
	Auto Pump		-	Optional	Optional	Optional	Included	Included
Refrigerant	Type		-	R-454B	R-454B	R-454B	R-454B	R-454B
			lbs	5.29	5.29	5.29	9.5	9.5
Weight	Net Weight		lbs	553	586	586	1,424	1,424
Dimensions	W x D x H		inch	29 x 57 x 51	29 x 57 x 51	29 x 57 x 51	35 x 77 x 69	35 x 77 x 69
Operating Conditions	Min. - Max.	Cooling	°F	65~118 (18~45°C)	65~118 (18~45°C)	65~118 (18~45°C)	65~113 (18~45°C)	65~113 (18~45°C)
		Heating	°F	50~81 (10~27°C)	50~81 (10~27°C)	50~81 (10~27°C)	1~81 (-17~27°C)	1~81 (-17~27°C)
		Dehumidification	°F	59~118 (15~45°C)	59~118 (15~45°C)	59~118 (15~45°C)	59~113 (15~45°C)	59~113 (15~45°C)
Safety Device	High Pressure Switch			O	O	O	O	O
	Low Pressure Switch			O	O	O	O	O
	Compressor 3min. Delay Timer			O	O	O	O	O
	Thermostat Protector for Compressor			O	O	O	O	O
	Fan Motor Protection			O	O	O	O	O
	Automatic Full Tank Shut-Off			-	-	-	-	-
	Tank Position Detector			-	-	-	-	-

PORTABLE DEHUMIDIFIER



AXIAL TURBO FAN



PORTABLE AIR SCRUBBER



Items	Unit	ADH-8000R
Power Supply	Volts	115 V, 60 Hz, 1 Ph
Dehumidification	Max.	25.4 gal/day
	Nominal	15.9 gal/day
Power Consumption	kW/h	1.17
Current Consumption	A	10.25
Refrigerant	lbs	R-454B (1.21)
Decibel Level	dB	60
Motor Compressor	RLA	8.5 A LRA 38 A
Motor	FLA	2.1 A HP 0.32
High Pressure	psi	
Low Pressure	psi	
Size (WDXH)	inch	20 x 20 x 33.5
Weight	lbs	118
Operating Conditions	°F	34°F ~ 86°F (~ 90%) 87.8°F ~ 100.4°F (~ 60%)
Air Flow	CFM	High: 554 / Low: 392
Certification	-	ETL / CSA
Power cord	Length	25 ft

Items	Unit	AF-2300P
Power Supply	Volts	115 V, 60 Hz, 1 Ph
Current Consumption	A	High: 1.4 / Low: 1.13
Fan Type	-	Axial Fan
Fan Blade	-	16 inch Dia./7 blade/Integral
Decibel	dB	High: 62.5 / Low: 54.2
Weight	lbs	25.4
Power Socket	-	Y
Air Flow	CFM	High: 1,932
	CFM	Low: 1,417
Size (WDXH)	inch	20 x 22 x 15.7
Case	-	Roto-mold housing
Certification	-	ETL / CSA
Power cord	Length	25 ft


Items	Unit	HEPA-2000P
Power Supply	Volts	115 V, 60 Hz, 1 Ph
Air Flow	CFM	High: 1,950
		Low: 1,410
Power Consumption	kW	High: 1.25
		Low: 1.06
Weight	lbs	132
Size (WDXH)	inch	28.5 x 30 x 30
Certification	-	ETL / CSA
Power cord	Length	25 ft
dB	High	62
	Low	60

AIRREX ACCESSORIES

■ Louver Grill Kit (A)HSC-14R/18R/24R #GAC69051




■ Duct Nozzle Kit (A)HSC-14R/18R/24R #GAC69050



■ Louver Grill Kit HSC-36R/60R/HWC-60R



■ Duct Nozzle Kit HSC-36R/60R/HWC-60R

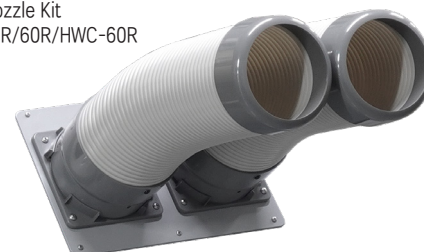

■ Flexible Duct (Twist&Lock) Dia. 5 inch x 1 ft / HSC-14R/18R/24R #GAC69044



■ Flexible Duct (Twist&Lock) Dia. 8 inch x 1.6 ft / HSC-36R/60R #GAC69043



■ Hose kit for HWC-19R/60R (25/40 ft) #GAC55007(25 ft) #GAC69056(40 ft)



■ Condensate Tank (4 gal) HSC-12R #A900116



■ Condensate Tank (5 gal) (A)HSC-14R/18R/24R #A900200



AIRREX ACCESSORIES

- Top flange 12"
#GAC55006



- Top flange 16"
#GAC55005

- Condensate Pump Kit for (A)HSC-14R/18R
#GAC69061
- Condensate Pump Kit for HSC-24R
#GAC69062




- Condensate Pump Kit for AHSC-42R/60R with bracket



- Evap Filter (Aluminium)




- Cond Filter (Aluminium)

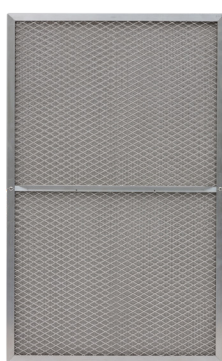


- HEPA Filter (Evap)
- HEPA Filter+Active Carbon Filter (Evap)




- Optional HEPA Filter Kit frame ((A)HSC-14R/18R/24R)
#GAC69049

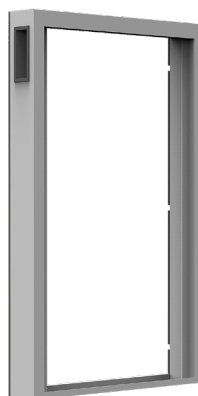


- Optional HEPA Filter Kit frame (HSC-36R) #GAC69052
(HSC-60R) #GAC69053

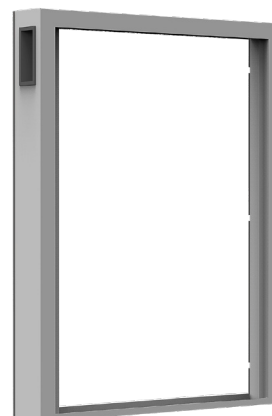


- Evap Plenum (A)HSC- 14R/18R/24R
#GAC69057

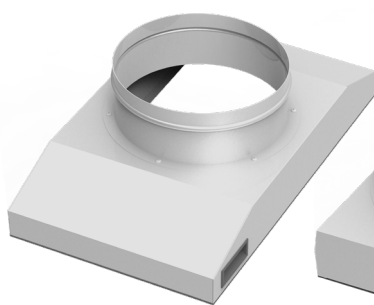


- Evap Plenum HSC- 36R
#GAC51141

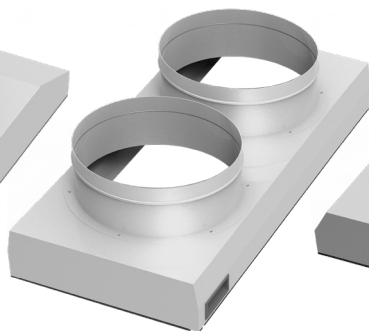


- Evap Plenum HSC- 60R
#GAC51143

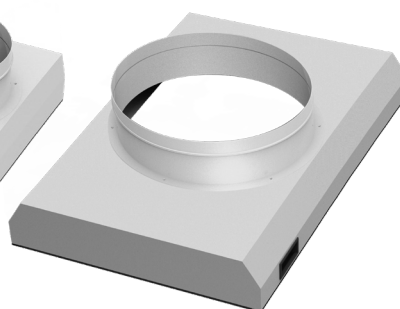


- Cond Plenum (A)HSC- 14R/18R/24R
#GAC69058

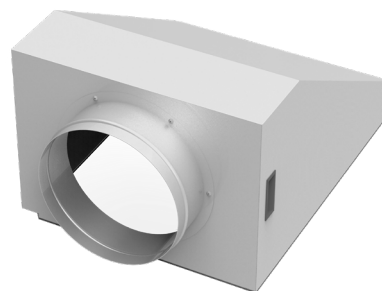

- Cond Plenum HSC- 36R
#GAC51142

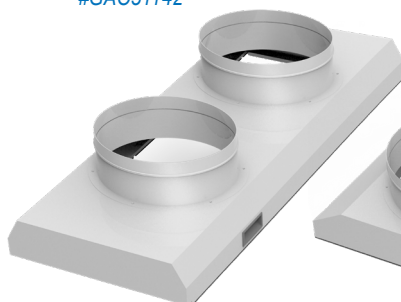

- Cond Plenum HSC- 60R
#GAC51144

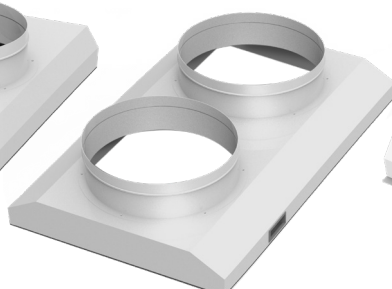

- Cond Plenum AHSC- 42R/60R
#GAC51170



- Cond Plenum AHSC- 140R
#GAC51140



We are continuously working and creating new innovations to help our customers stay cool in the summer and warm in the winter.





www.tempairsales.com

 2031 Exchange Parkway, Suite A, Waco, TX 76712

 888-535-8841

 sales@tempairsales.com



US Electrical Standards
(ETL)

Designs and specifications of products are subject to change without prior notice for the improvements. The colors of products may be different due to the printing process.

Copyright © 2025 Hephzibah Co.,Ltd. All Rights Reserved.