


# Features and Benefits

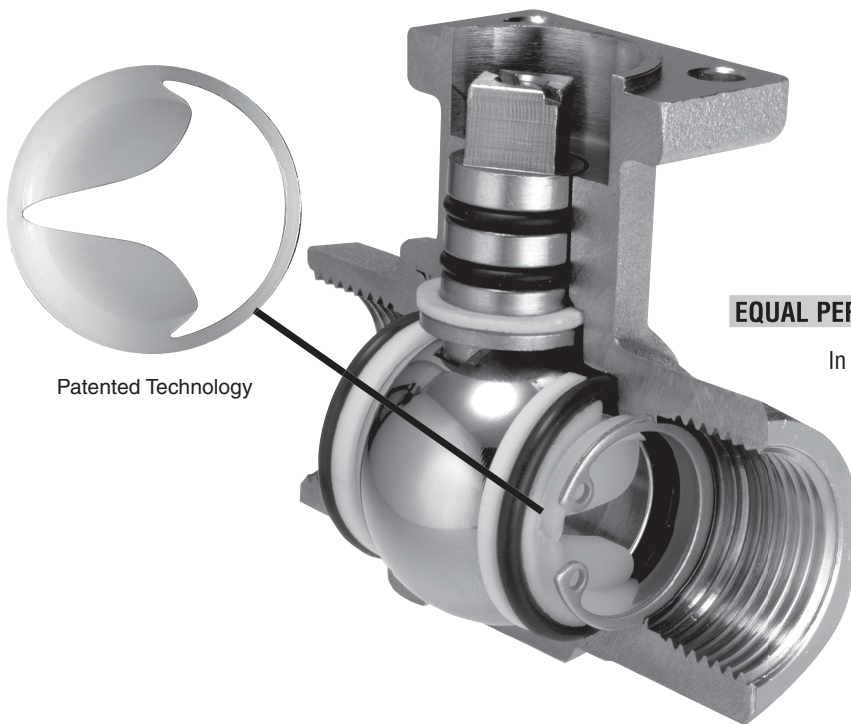

## EQUAL PERCENTAGE VALVE CHARACTERISTIC

In order to ensure good stability of control, it is essential for a control valve to have an equal percentage characteristic. This type of characteristic produces a linear variation in thermal output according to the amount of opening of the valve (also known as the system characteristic). Under normal testing conditions a conventional ball valve exhibits an S-shaped characteristic. When it is installed in a real system, however, this characteristic is seriously deformed because, compared with its nominal size, a ball valve possesses an extremely high flow coefficient. Whether used with or without pipe reducers or a reduced bore, they do not normally allow stable regulation of the thermal capacity.

## BENEFIT OF THE BELIMO CHARACTERIZING DISC


- Equal percentage flow characteristic.
- Excellent control stability assured with the characterizing disc.
- $C_v$  values equal to  $C_v$  values of globe valves the same size.
- The need for multiple pipe reduction is usually eliminated.
- Better control prevents “hunting” of the control loop, increasing life span of actuator and valve.

Belimo’s unique Characterized Control Valve™ (CCV) is very different. A special characterizing disc inside the valve gives it an equal percentage characteristic which is comparable with that of a globe valve of the same nominal size. The flow (the  $C_v$  value) is reduced to the required value by a combination of the hole in the ball and the shaped aperture in the disc. The increase in flow as the valve is opened is very slow and controlled.

This produces better part-load behavior and improved stability of control while also optimizing energy consumption.

## FEATURES

- Thermal isolating adapter between flange and actuator.
- Easy direct coupling of actuator with a single screw.
- Perpendicular mounting flange and square drive head eliminate lateral forces on the stem.
- Blow-out proof stem with thrust-bearing Teflon® disc and double O-ring design for long service life.\*
- Non-corroding chrome-plated brass or stainless ball.

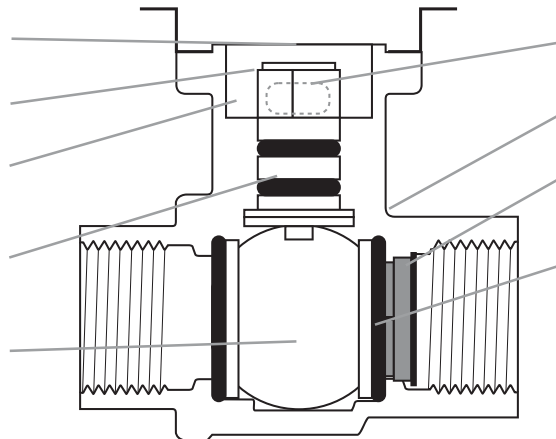

- Vent holes reduce condensation build-up.
- Forged brass valve body — no pin-hole leaks.
- Characterizing disc — made of Tefzel® known for excellent strength and chemical resistance.
- Teflon® seats with O-rings provide constant seating force against the ball and reduce torque requirement.
- Actuator can be mounted in four different positions.

\* Designed for service life of over 100,000 full cycles.  
Teflon® and Tefzel® are both registered trademarks of Dupont.

**COORDINATED MOTORIZED OPERATION**

The optimum functionality of the Belimo CCV is assured by properly coordinating its actuation with MFT. Specially developed rotary actuators provide the necessary precision for modulating, floating-point, and on/off methods of control.

All CCVs are supplied with the appropriate rotary actuator to provide the close-off and operation desired.

**OPTIMIZED FOR CONTROL**

The Belimo CCV marries known technology with an innovative development – the unique characterizing disc.




The marriage of CCV and MFT technologies has produced a range of valuable features which surpass the capabilities of globe valves at a very attractive price level:

- An equal-percentage valve characteristic
- Unlike a globe valve, no sudden change in inlet flow upon opening
- Excellent stability of control
- C<sub>v</sub> values comparable with those of globe valves of the same size or larger
- Higher close-off ratings than standard globe valves
- 100% tight shut-off on two-way valves means NO leak-by unlike globe valves that have ANSI IV shutoff (leakage rate of 0.01% of the C<sub>v</sub> rating)
- Three-way valve can be piped in mixing or diverting application

<b>B2 Series</b>	<b>Two-way ½" to 3"</b>
<b>B3 Series</b>	<b>Three-way ½" to 2"</b> <b>Mixing*/Diverting</b>
<b>B6 Series</b>	<b>Two-way Flanged 2½" to 6"</b>
<b>Service:</b>	<b>Chilled/hot water, 60% glycol</b>
<b>C<sub>v</sub> Range</b>	<b>0.3-240</b>
<b>Material:</b>	<b>Stainless trim or Brass trim</b>
<b>Control:</b>	<b>On/Off, Floating, 2-10 VDC</b> <b>Multi-Function Technology®</b> <b>Spring Return or Non-Spring Return</b>

Mixing\* (Not for use in change over applications)

**Flow Characteristics of Conventional Ball Valves versus BELIMO CHARACTERIZED CONTROL VALVES**

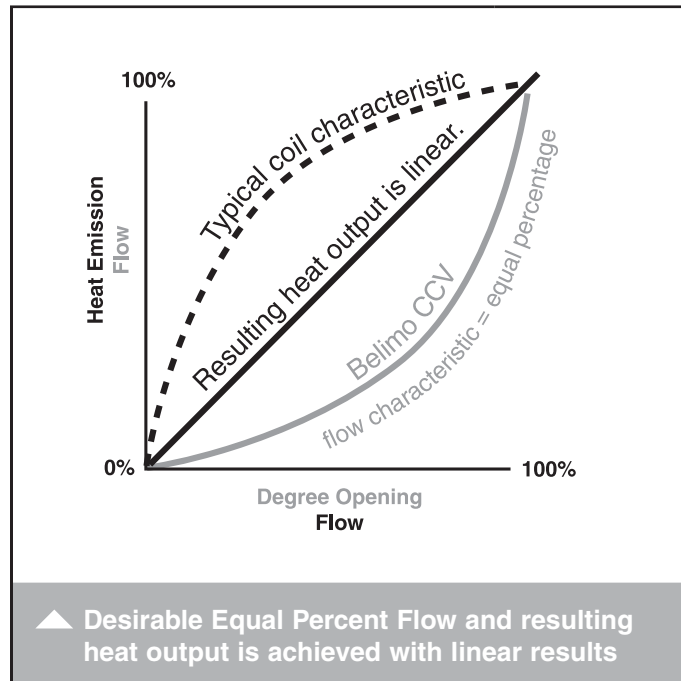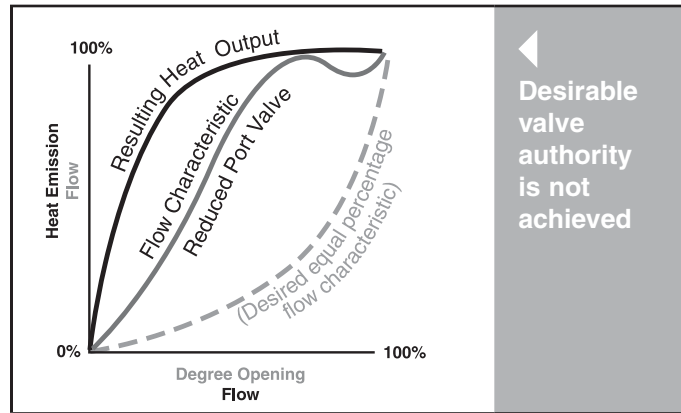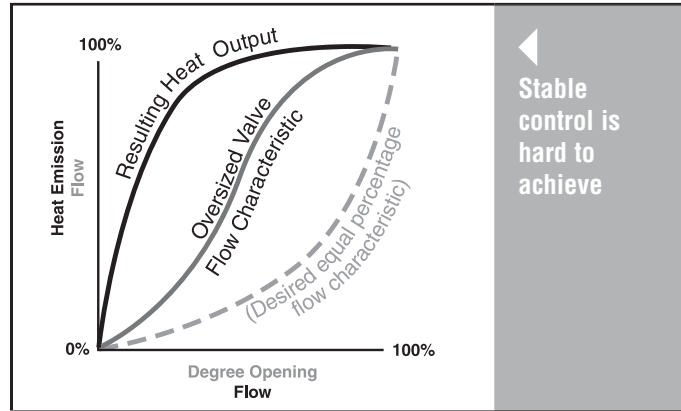

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

**2-Way Valve Flow Rate for Water Applications (Gallons Per Minute, GPM)**

C <sub>v</sub> Maximum Rating	Inches	DN mm	2-Way CCV	Pressure Drop Across the Valve									
				1 psi	2 psi	3 psi	4 psi	5 psi	6 psi	7 psi	8 psi	9 psi	10 psi
0.3	½"	15	B207(B)	0.3	0.4	0.5	0.6	0.7	0.7	0.8	0.8	0.9	0.9
0.46	½"	15	B208(B)	0.5	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5
0.8	½"	15	B209(B)	0.8	1.1	1.4	1.6	1.8	2.0	2.1	2.3	2.4	2.5
1.2	½"	15	B210(B)	1.2	1.7	2.1	2.4	2.8	2.9	3.2	3.4	3.6	3.8
1.9	½"	15	B211(B)	1.9	2.7	3.3	3.8	4.2	4.7	5.0	5.4	5.7	6.0
3	½"	15	B212(B)	3.0	4.2	5.2	6.0	6.8	7.3	7.9	8.5	9.0	9.5
4.7	½"	15	B213(B)	4.7	6.6	8.1	9.4	11	12	12	13	14	15
7.4	½"	15	B214(B)	7.4	10	13	15	17	18	20	21	22	23
10	½"	15	B215(B)*	10	14	17	20	22	24	26	28	30	32
16	½"	15	B216(B)*	14	20	24	28	31	34	37	40	42	44
4.7	¾"	20	B217(B)	4.7	6.6	8.1	9.4	11	12	12	13	14	15
7.4	¾"	20	B218(B)	7.4	10	13	15	17	18	20	21	22	23
10	¾"	20	B219(B)	10	14	17	20	22	24	26	28	30	32
14	¾"	20	B220(B)*	14	20	24	28	31	34	37	40	42	44
24	¾"	20	B221(B)*	24	34	42	48	54	59	63	68	72	76
7.4	1"	25	B222	7.4	10	13	15	17	18	20	21	22	23
10	1"	25	B223	10	14	17	20	22	24	26	28	30	32
19	1"	25	B224	19	27	33	38	42	47	50	54	57	60
30	1"	25	B225*	30	42	52	60	67	73	79	85	90	95
10	1¼"	32	B229	10	14	17	20	22	24	26	28	30	32
19	1¼"	32	B230*	19	27	33	38	42	47	50	54	57	60
25	1¼"	32	B231	25	35	43	50	56	61	66	71	75	79
37	1¼"	32	B232*	37	52	64	74	83	91	98	105	111	117
19	1½"	40	B238	19	27	33	38	42	47	50	54	57	60
29	1½"	40	B239	29	41	50	58	65	71	77	82	87	92
37	1½"	40	B240*	37	52	64	74	83	91	98	105	111	117
29	2"	50	B248	29	41	50	58	65	71	77	82	87	92
46	2"	50	B249	46	65	80	92	103	113	122	130	138	145
57	2"	50	B250*	57	81	99	114	127	140	151	161	171	180
65	2"	50	B251	65	92	113	130	145	159	170	194	195	206
85	2"	50	B252	85	120	147	170	190	208	225	240	255	269
120	2"	50	B253	120	170	208	240	268	294	318	339	360	380
240	2"	50	B254*	240	339	416	480	537	588	635	679	720	759
60	2½"	65	B261	60	85	104	120	134	147	159	170	180	190
75	2½"	65	B262	75	106	130	150	168	194	198	212	225	237
110	2½"	65	B263	110	156	191	220	246	269	291	311	330	348
150	2½"	65	B264	150	212	260	300	335	367	397	424	450	474
210	2½"	65	B265*	210	297	364	420	470	514	556	594	630	664
70	3"	80	B277	70	99	121	140	157	172	185	198	210	221
130	3"	80	B278	130	194	225	260	290	318	344	368	390	411
170	3"	80	B280*	170	240	294	340	380	416	450	481	510	538
70	2½"	65	B6250S-070	70	99	121	140	157	171	185	198	210	221
110	2½"	65	B6250S-110	110	156	191	220	244	266	282	296	312	320
110	3"	80	B6300S-110	110	156	191	220	244	266	282	296	312	320
186	4"	100	B6400S-186	186	263	322	372	416	456	492	526	558	588
290	5"	125	B6500S-290	290	410	502	580	648	710	767	820	870	917
400	6"	150	B6600S-400	400	566	693	800	894	980	1058	1131	1200	1265

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

$GPM = C_v \times \sqrt{\Delta p}$

\*Models with no characterizing disc.

The influence of the pipe geometry due to reduced flow is negligible for all valves 57 C<sub>v</sub> and below with characterizing discs.

**3-Way Valve Flow Rate for Water Applications (Gallons Per Minute, GPM)**

C <sub>v</sub> Maximum Rating	Inches	DN mm	3-Way CCV	Pressure Drop Across the Valve									
				1 psi	2 psi	3 psi	4 psi	5 psi	6 psi	7 psi	8 psi	9 psi	10 psi
0.3	½"	15	B307(B)	0.3	0.4	0.5	0.6	0.7	0.7	0.8	0.8	0.9	0.9
0.46	½"	15	B308(B)	0.5	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5
0.8	½"	15	B309(B)	0.8	1.1	1.4	1.6	1.8	2.0	2.1	2.3	2.4	2.5
1.2	½"	15	B310(B)	1.2	1.7	2.1	2.4	2.8	2.9	3.2	3.4	3.6	3.8
1.9	½"	15	B311(B)	1.9	2.7	3.3	3.8	4.2	4.7	5.0	5.4	5.7	6.0
3	½"	15	B312(B)	3.0	4.2	5.2	6.0	6.8	7.3	7.9	8.5	9.0	9.5
4.7	½"	15	B313(B)	4.7	6.6	8.1	9.4	11	12	12	13	14	15
10	½"	15	B315(B)*	10	14	17	20	22	24	26	28	30	32
16	½"	15	B316(B)*	14	20	24	28	31	34	37	40	42	44
4.7	¾"	20	B317(B)	4.7	6.6	8.1	9.4	11	12	12	13	14	15
7.4	¾"	20	B318(B)	7.4	10	13	15	17	18	20	21	22	23
14	¾"	20	B320(B)*	14	20	24	28	31	34	37	40	42	44
24	¾"	20	B321(B)*	24	34	42	48	54	59	63	68	72	76
7.4	1"	25	B222	7.4	10	13	15	17	18	20	21	22	23
10	1"	25	B223	10	14	17	20	22	24	26	28	30	32
30	1"	25	B325*	30	42	52	60	67	73	79	85	90	95
10	1¼"	32	B329	10	14	17	20	22	25	27	28	30	32
19	1¼"	32	B330	19	27	33	38	43	47	50	54	57	60
25	1¼"	32	B331	25	35	43	50	56	61	66	71	75	79
19	1½"	40	B338	19	27	33	38	43	47	50	54	57	60
29	1½"	40	B339	29	41	50	58	65	71	77	82	87	92
37	1½"	40	B340	37	52	64	74	83	91	98	105	111	117
46	1½"	40	B341	46	65	80	92	103	113	122	130	138	146
29	2"	50	B347	29	41	50	58	65	71	77	82	87	92
37	2"	50	B348	37	52	64	74	83	91	98	105	111	117
46	2"	50	B349	46	65	80	92	103	113	122	130	138	146
57	2"	50	B350	57	81	99	114	128	140	151	161	171	180
68	2"	50	B351	68	96	118	136	152	167	180	192	204	215
83	2"	50	B352	83	117	144	166	186	204	220	235	249	263

GPM = C<sub>v</sub> × √Δp \* = Models with no characterizing disc.  
 The influence of the pipe geometry due to reduced flow is negligible for all valves 83 C<sub>v</sub> and below with characterizing discs.

## SET-UP

		2-WAY VALVE		3-WAY VALVE	
		SPECIFY UPON ORDERING		SPECIFY UPON ORDERING	
<b>NON-SPRING RETURN</b> Stays in Last Position	<b>TR24-3-T US</b> <b>TR24-3 US</b> On/Off or Floating Point Actuators	Power to pin 2 will drive valve CCW. Power to pin 3 will drive valve CW.		Power to pin 2 will drive valve CCW. Power to pin 3 will drive valve CW.	
	<b>TR24-SR-T US</b> <b>TR24-SR US</b> Proportional Type Actuators	<b>NC:</b> Closed A to AB, will open as voltage increases.	<b>NO:</b> Open A to AB, will close as voltage increases. (Can be chosen with switch inside terminal block of actuator.)	<b>NC:</b> Closed A to AB, will open as voltage increases.	<b>NO:</b> Open A to AB, will close as voltage increases. (Can be chosen with switch inside terminal block of actuator.)
	<b>LRB24 (-3), MFT, SR</b> <b>LRX24 (-3), MFT, SR</b> <b>ARB24 (-3), MFT, SR</b> <b>ARX24 (-3), MFT, SR</b> Floating Point or Proportional Type Actuators	Power to pin 2 will drive valve CW. Power to pin 3 will drive valve CCW. The above will function when the directional switch is in the "1" position, to reverse select the "0" position.	<b>NO:</b> Open A to AB, will close as voltage increases or power applied. (Can be chosen with CW/CCW switch.)		Power to pin 2 will drive valve CW. Power to pin 3 will drive valve CCW. The above will function when the directional switch is in the "1" position, to reverse select the "0" position.
<b>SPRING RETURN</b> Note Fail Position	<b>TFRB24</b> <b>LF24 US</b> <b>AFRB24</b>	<b>NO/FO</b> Valve: Open A to AB will drive closed. Spring Action: Will spring open A to AB upon power loss.	<b>NC/FC</b> Valve: Closed A to AB will drive open. Spring Action: Will spring closed A to AB upon power loss.	<b>NO/FO</b> Valve: Open A to AB will drive closed. Spring Action: Will spring open A to AB upon power loss.	<b>NC/FC</b> Valve: Closed A to AB will drive open. Spring Action: Will spring closed A to AB upon power loss.
	<b>TF (-3), MFT, SR</b> <b>LF (-3), MFT, SR</b> <b>AF SR</b> <b>AFR, MFT</b> Floating Point or Proportional Type Actuators	<b>NC/FO</b> Valve: Closed A to AB will drive open. Spring Action: Will spring open A to AB upon power loss.	<b>NC/FC or NO/FC</b> Valve: Closed A to AB or Open A to AB. (Can be chosen with CW/CCW switch.) Spring Action: Will spring closed A to AB upon power loss.  <b>NO/FO</b> Valve: Open A to AB Spring Action: Will spring open A to AB upon power loss. ( <b>NO</b> action can be chosen with CW/CCW switch.)	<b>NC/FO</b> Valve: Closed A to AB will drive open Spring Action: Will spring open A to AB upon power loss.	<b>NC/FC or NO/FC</b> Valve: Closed A to AB or Open A to AB. (Can be chosen with CW/CCW switch.) Spring Action: Will spring closed A to AB upon power loss.  <b>NO/FO</b> Valve: Open A to AB Spring Action: Will spring open A to AB upon power loss. ( <b>NO</b> action can be chosen with CW/CCW switch.)

## GENERAL WIRING INSTRUCTIONS

**WARNING** The wiring technician must be trained and experienced with electronic circuits. Disconnect power supply before attempting any wiring connections or changes. Make all connections in accordance with wiring diagrams and follow all applicable local and national codes. Provide disconnect and overload protection as required. Use copper, twisted pair, conductors only. If using electrical conduit, the attachment to the actuator must be made with flexible conduit.

**Always read the controller manufacturer's installation literature carefully before making any connections.** Follow all instructions in this literature. If you have any questions, contact the controller manufacturer and/or Belimo.

### Transformer(s)

Belimo actuators require a 24 VAC class 2 transformer and draws a maximum of 10 VA per actuator. The actuator enclosure cannot be opened



in the field, there are no parts or components to be replaced or repaired.

- EMC directive: 89/336/EEC
- Software class A: Mode of operation type 1
- Low voltage directive: 73/23/EEC


**CAUTION** It is good practice to power electronic or digital controllers from a separate power transformer than that used for actuators or other end devices. The power supply design in our actuators and other end devices use half wave rectification. Some controllers use full wave rectification. When these two different types of power supplies are connected to the same power transformer and the DC commons are connected together, a short circuit is created across one of the diodes in the full wave power supply, damaging the controller. Only use a single power transformer to power the controller and actuator if you know the controller power supply uses half wave rectification.

## FLOW PATTERNS


### 2-way Characterized Control Valves™

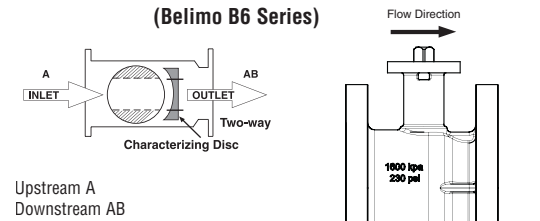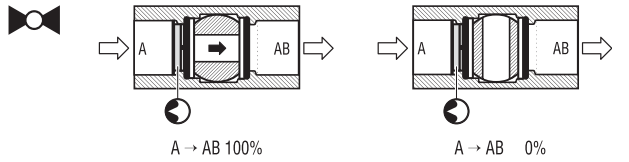

### 3-way Characterized Control Valves™ MIXING (Not for use in change over applications)

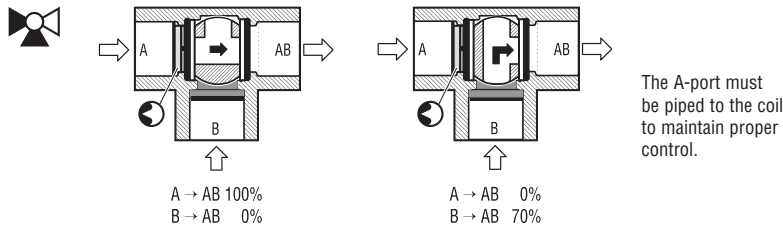


### DIVERTING

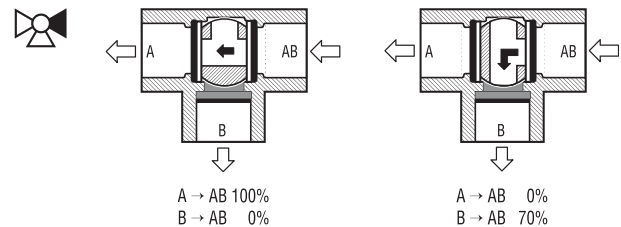

## INCORRECT PIPING

The A-port must be piped to the coil to maintain proper control.

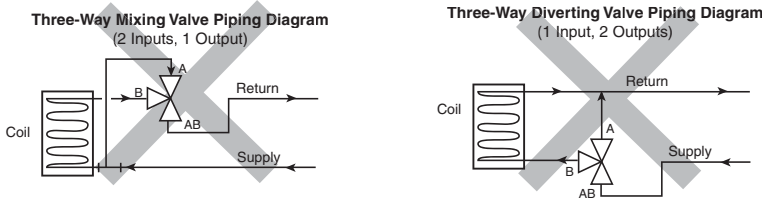

**WARNING! Do Not Pipe in this manner!**

**Note Valve Porting!**


**The A-port must be piped to the coil! Not the B-port!**

Flow is not possible from A to B. If AB-port is not piped as the common port, the valve must be re-piped. It is good practice to install a balancing valve in the bypass line. These valves are intended for closed loop systems. Do not install in an open loop system or in an application that is open to atmospheric pressure.

## OPERATION/INSTALLATION – CORRECT PIPING

2-way valves should be installed with the characterizing discs upstream. No damage to the valve will result if installed incorrectly with the characterizing discs downstream.

**3-WAY VALVES MUST BE PIPED CORRECTLY. They can be mixing or diverting. Mixing is the preferred piping arrangement.**

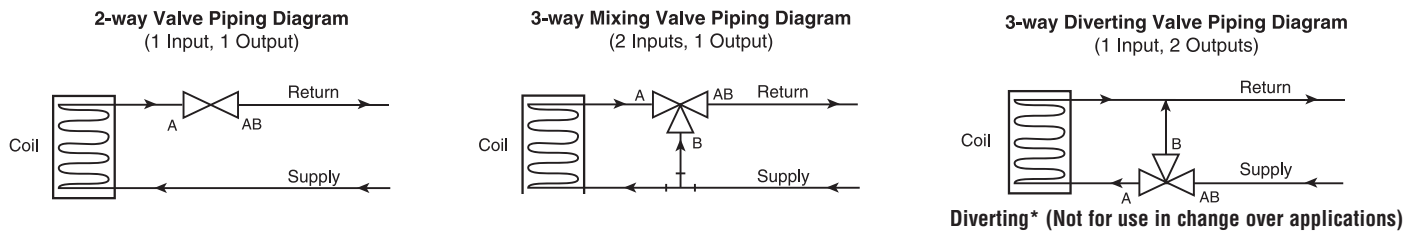

The BELIMO Characterized Control Valve is a CONTROL valve, not a manual valve adapted for actuation. The control port is the A-port. It is similar to the globe valve in that the middle port is the B or bypass port. The common port AB is on the main opposite the A-port. These diagrams are for typical applications only. Consult engineering specification and drawings for particular circumstances.

### REDUCED B-PORT FLOW

Note: The B-port flow of the 3-way CCV is lower than that of the A-port. In most applications this is beneficial since the reduced flow compensates for the in-existent pressure drop across the coil in the bypass mode. Therefore, proper sizing is important to avoid flow noise in particular when the system is designed with constant speed pumps. Please refer to our valve sizing and selection guidelines.

The flow velocity in the pipe upstream and downstream of the valve should be considered as well. The typical HVAC design maximum flow is 4 to 8 ft/s to avoid noise issues.


Also, the pipe reduction factor must be considered and can be found on pages 3 and 4. Pipe reducers decrease the  $C_v$  value of a valve and consequently increase the pressure drop across the valve, a situation that could lead to noise or a lower than designed flow.

### Diverting\* (Not for use in change over applications)

B2	09		+LRX	24	-MFT	
<b>Valve</b> B2 = 2-way B3 = 3-way	<b>Valve Size</b> 07-80 = ½" to 3"	<b>Trim Material</b> B = Chrome Plated Brass Ball, Nickel Plated Stem Blank = Stainless Steel Ball and Stem	<b>Actuator Type</b> <b>Non Fail-Safe</b> TR LRB, LRX LRQX NRB, NRX NRQX ARB, ARX ARQX <b>Fail-Safe Spring Return</b> TFR, TFRX LF AFR, AFRX <b>Electronic</b> GKR	<b>Power Supply</b> 24 = 24 VAC/DC 120 = 120 VAC* 230 = 230 VAC UP = 24 to 240 VAC	<b>Control</b> Blank = On/Off -3 = On/Off, Floating Point -SR = 2-10 VDC -MFT = Multi-Function Technology -MFT95 = 0-135 Ω -IP = Internet Protocol	-S = Built-in Auxiliary Switch -T = Terminal Strip N4 = NEMA 4/4X N4H = NEMA 4/4X with Heater

\*LR and AR include 120-240 VAC

### Ordering Example

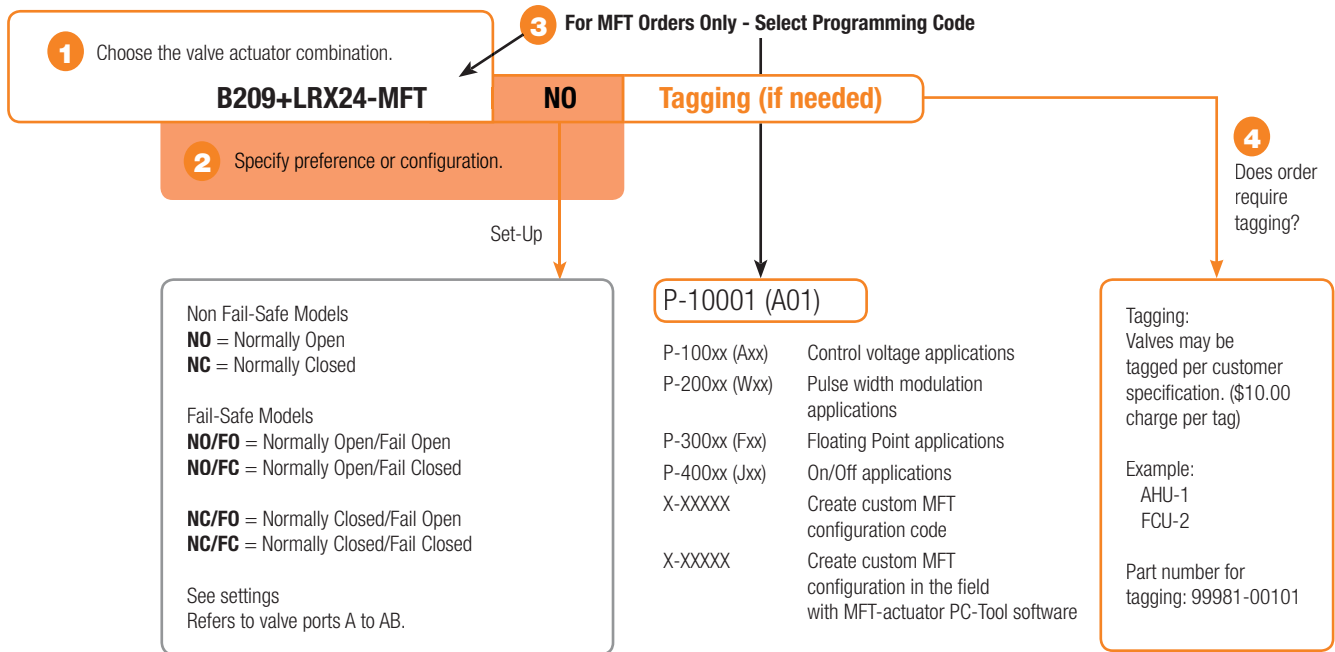

**5** Complete Ordering Example: B209+LRX24-MFT  
Configuration: +NO  
Programming: +A01

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

# Nomenclature


## Characterized Control Valve™ (CCV)



B6	250	S	-070	+GRX	24	-MFT	
<b>Valve</b> B6 = 2-way Flanged	<b>Valve Size</b> 250-600 = 2½" to 6"	<b>Trim Material</b> S = Stainless Steel Ball and Stem	<b>Cv</b> 070 = 70 Cv 110 = 110 Cv 186 = 186 Cv 290 = 290 Cv 400 = 400 Cv	<b>Actuator Type</b> <b>Non Fail-Safe</b> ARB, ARX GRB, GRX <b>Fail-Safe Spring Return</b> AFRB, AFRX <b>Electronic</b> GKRB, GKRX	<b>Power Supply</b> 24 = 24 VAC/DC 120 = 120 VAC* 230 = 230 VAC UP = 24 to 240 VAC	<b>Control</b> Blank = On/Off -3 = On/Off, Floating Point -SR = 2-10 VDC -MFT = Multi-Function Technology -MFT95 = 0-135 Ω -IP = Internet Protocol	N4 = NEMA 4/4X N4H = NEMA 4/4X with Heater

\*AR includes 120-240 VAC

### Ordering Example

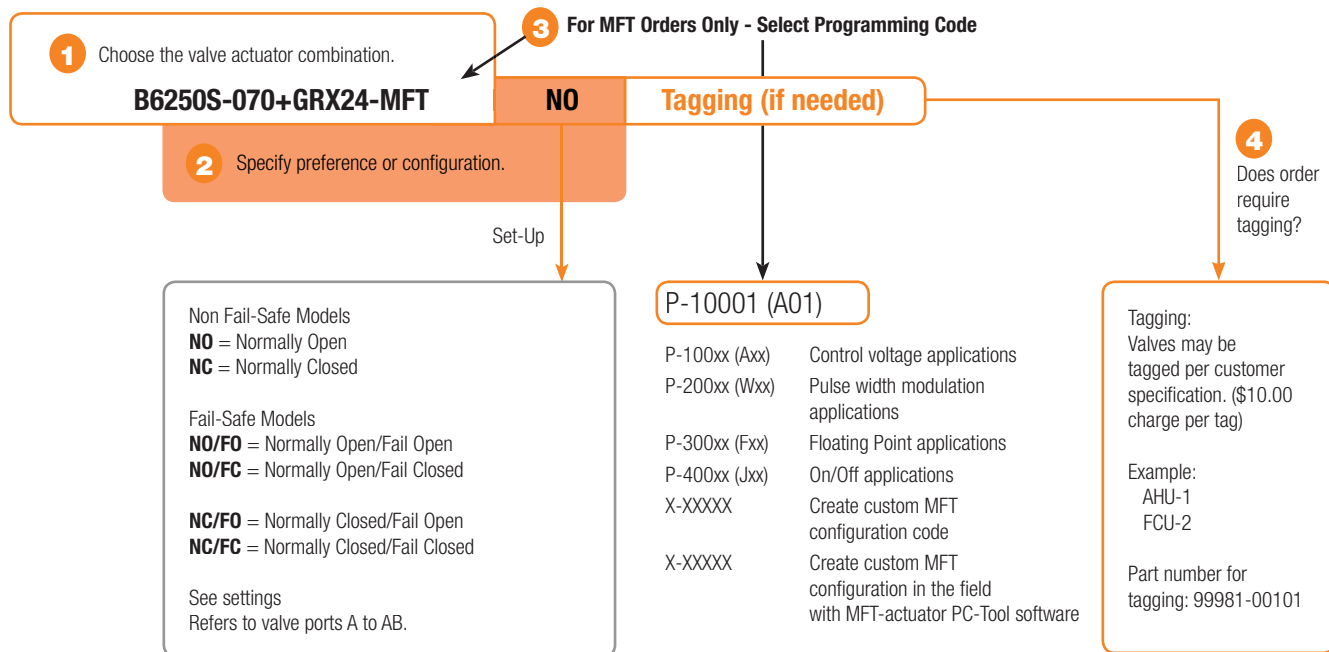

**5** Complete Ordering Example: B6250S-070+GRX24-MFT  
Configuration: +NO  
Programming: +A01





### Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.


Technical Data	
Service	chilled or hot water, 60% glycol
Flow characteristic	A-port equal percentage
Controllable Flow Range	75°
Sizes	½", ¾"
Type of end fitting	NPT female ends
Materials:	
Body	forged brass, nickel plated
Ball	chrome plated brass
Stem	nickel plated brass
Seats	PTFE
Characterizing disc	Tefzel®
Packing	2 EPDM O-rings, lubricated
Body pressure rating	600 psi
Media temp. range	0°F to 250°F [-18°C to 120°C]
Close off pressure	200 psi
Maximum differential pressure (ΔP)	50 psi for typical applications
Leakage	0% for A to AB
External leakage	according to EN 12266-1:2003
C <sub>v</sub> rating	A-port: see product chart for values

Tefzel® is a registered trademark of DuPont

C <sub>v</sub>	Valve Nominal Size		Type	Suitable Actuators			
	Inches	DN [mm]	2-way NPT	Non-Spring		Spring	
0.3	½"	15	B207B	TR Series	LR Series	TF Series	LF Series
0.46	½"	15	B208B				
0.8	½"	15	B209B				
1.2	½"	15	B210B				
1.9	½"	15	B211B				
3	½"	15	B212B				
4.7	½"	15	B213B				
7.4	½"	15	B214B				
10	½"	15	B215B				
16	½"	15	B216B				
4.7	¾"	20	B217B	TR Series	LR Series	TF Series	LF Series
7.4	¾"	20	B218B				
10	¾"	20	B219B				
14	¾"	20	B220B				
24	¾"	20	B221B*				

\*Models without characterizing disc


### Dimensions

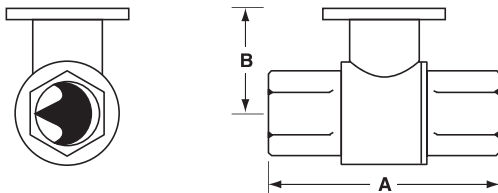

2WayValve-B207-B220

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207B-B211B	½"	15	2.38" [60.8]	1.39" [35.2]
B212B-B216B	½"	15	2.38" [60.8]	1.78" [45.2]
B217B-B221B	¾"	20	2.73" [69.3]	1.87" [47.4]

### Flow Patterns

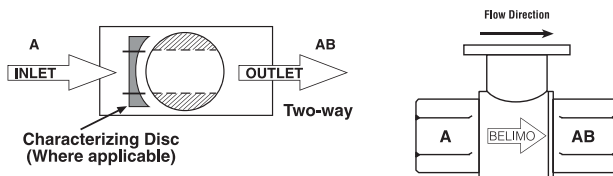

# B3 Series, 3-Way, Characterized Control Valve Chrome Plated Brass Ball and Brass Stem




## Technical Data

Service	chilled or hot water, 60% glycol
Flow characteristic	A-port equal percentage B-port modified for constant common port flow
Controllable Flow Range	75°
Sizes	½", ¾"
Type of end fitting	NPT female ends
Materials:	
Body	forged brass, nickel plated
Ball	chrome plated brass
Stem	nickel plated brass
Seats	PTFE
Characterizing disc	Tefzel®
Packing	2 EPDM O-rings, lubricated
Body pressure rating	600 psi
Media temp. range	0°F to 250°F [-18°C to 120°C]
Close off pressure	200 psi
Maximum differential pressure (ΔP)	50 psi for typical applications
Leakage	0% for A to AB <2.0% for B to AB
External leakage	according to EN 12266-1:2003
C <sub>v</sub> rating	A-port: see product chart for values B-port: 70% of A to AB C <sub>v</sub>

Tefzel® is a registered trademark of DuPont

## Dimensions

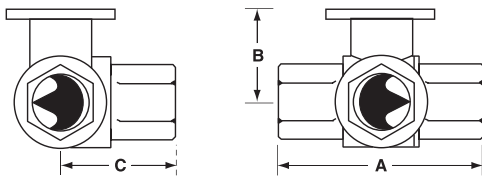


3WayValve-B307-B320

### Valve Nominal Size      Dimensions (Inches [mm])

Valve Body	Inches	DN [mm]	A	B	C
B307B-B311B	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312B-B316B	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317B-B321B	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]

## Flow Patterns

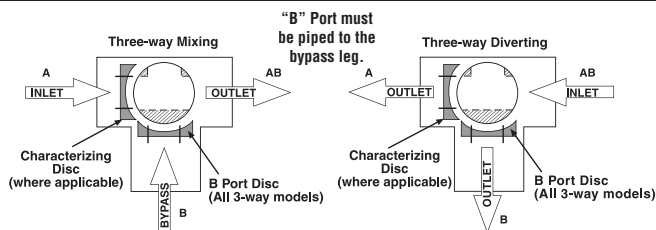

## Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.

**\* (Not for use in change over applications)**

C <sub>v</sub>	Valve Nominal Size		Type	Suitable Actuators			
	Inches	DN [mm]	3-way NPT	Non-Spring		Spring	
0.3	½	15	B307B	TR Series	LR Series	TF Series	LF Series
0.46	½	15	B308B				
0.8	½	15	B309B				
1.2	½	15	B310B				
1.9	½	15	B311B				
3	½	15	B312B				
4.7	½	15	B313B				
10	½	15	B315B				
16	½	15	B316B				
4.7	¾	20	B317B				
7.4	¾	20	B318B				
14	¾	20	B320B				
24	¾	20	B321B				


\*Models without characterizing disc



Technical Data	
Service	chilled or hot water, 60% glycol
Flow characteristic	A-port equal percentage
Controllable Flow Range	75°
Sizes	½", ¾", 1", 1¼", 1½", 2", 2½", 3"
Type of end fitting	NPT female ends
Materials:	
Body	forged brass, nickel plated
Ball	stainless steel
Stem	stainless steel
Seats	PTFE
Characterizing disc	Tefzel®
Packing	2 EPDM O-rings, lubricated
Body pressure rating	
600 psi	½" - 1¼" (B230)
400 psi	1¼" (B231) - 3"
Media temp. range	0°F to 250°F [-18°C to 120°C]
Close off pressure	
200 psi	½" - 2" (B254)
100 psi	2½" (B261) - 3"
Maximum differential pressure (ΔP)	50 psi for typical applications
Leakage	0% for A to AB
External leakage	according to EN 12266-1:2003
C <sub>v</sub> rating	A-port: see product chart for values

Tefzel® is a registered trademark of DuPont

### Dimensions

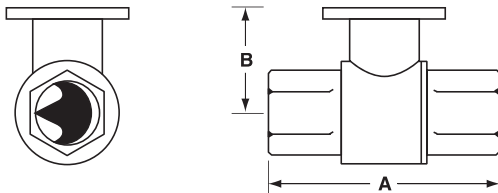

2WayValve-B207-B220

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B216	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.27" [57.7]
B251-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B261-B265	2½"	65	5.55" [140.9]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]


### Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.

C <sub>v</sub>	Valve Nominal Size		Type	Suitable Actuators		
	Inches	DN [mm]		Non-Spring	Spring	
0.3	½"	15	B207	TR Series	LR Series	TF Series
0.46	½"	15	B208			
0.8	½"	15	B209			
1.2	½"	15	B210			
1.9	½"	15	B211			
3	½"	15	B212			
4.7	½"	15	B213			
7.4	½"	15	B214			
10	½"	15	B215			
16	½"	15	B216			
4.7	¾"	20	B217	NR...N4 Series	LF Series	
7.4	¾"	20	B218			
10	¾"	20	B219			
14	¾"	20	B220			
24	¾"	20	B221*			
7.4	1"	25	B222			
10	1"	25	B223			
19	1"	25	B224			
30	1"	25	B225*			
10	1¼"	32	B229			
19	1¼"	32	B230*	AR Series	AR...N4 Series	
25	1¼"	32	B231			
37	1¼"	32	B232*			
19	1½"	40	B238			
29	1½"	40	B239			
37	1½"	40	B240*			
29	2"	50	B248			
46	2"	50	B249			
57	2"	50	B250*			
65	2"	50	B251			
85	2"	50	B252	AF Series		
120	2"	50	B253			
240	2"	50	B254*			
60	2½"	65	B261			
75	2½"	65	B262			
110	2½"	65	B263			
150	2½"	65	B264			
210	2½"	65	B265*			
70	3"	80	B277			
130	3"	80	B278			
170	3"	80	B280*			

\*Models without characterizing disc

### Flow Patterns

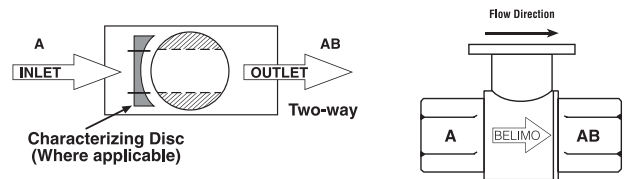

# B3 Series, Three Way, Characterized Control Valve Stainless Steel Ball and Stem




## Technical Data

Service	chilled or hot water, 60% glycol
Flow characteristic	A-port equal percentage B-port modified for constant common port flow
Controllable Flow Range	75°
Sizes	½", ¾", 1", 1¼", 1½", 2"
Type of end fitting	NPT female ends
Materials:	
Body	forged brass, nickel plated
Ball	stainless steel
Stem	stainless steel
Seats	PTFE
Characterizing disc	Tefzel®
Packing	2 EPDM O-rings, lubricated
Body pressure rating	
600 psi	½" - 1"
400 psi	1¼" - 2"
Media temp. range	0°F to 250°F [-18°C to 120°C]
Close off pressure	
200 psi	½" - 2"
Maximum differential pressure (ΔP)	50 psi for typical applications
Leakage	0% for A to AB <2.0% for B to AB
External leakage	according to EN 12266-1:2003
C <sub>v</sub> rating	A-port: see product chart for values B-port: 70% of A to AB C <sub>v</sub>

Tefzel® is a registered trademark of DuPont

## Dimensions

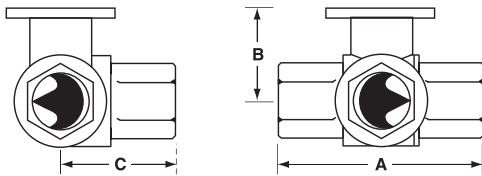

3Way Valve-B307-B320

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B316	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

## Application


This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.

\* (Not for use in change over applications)

C <sub>v</sub>	Valve Nominal Size		Type	Suitable Actuators	
	Inches	DN [mm]		Non-Spring	Spring
0.3	½"	15	B307	TR Series	TF Series
0.46	½"	15	B308		
0.8	½"	15	B309		
1.2	½"	15	B310		
1.9	½"	15	B311		
3	½"	15	B312		
4.7	½"	15	B313		
10	½"	15	B315		
16	½"	15	B316		
4.7	¾"	20	B317		
7.4	¾"	20	B318		
14	¾"	20	B320		
24	¾"	20	B321		
7.4	1"	25	B322	LR Series	LF Series
10	1"	25	B323		
30	1"	25	B325*		
10	1¼"	32	B329		
19	1¼"	32	B330		
25	1¼"	32	B331		
19	1½"	40	B338		
29	1½"	40	B339		
37	1½"	40	B340		
46	1½"	40	B341		
29	2"	50	B347		
37	2"	50	B348		
46	2"	50	B349		
57	2"	50	B350		
68	2"	50	B351		
83	2"	50	B352		

\*Models without characterizing disc

## Flow Patterns

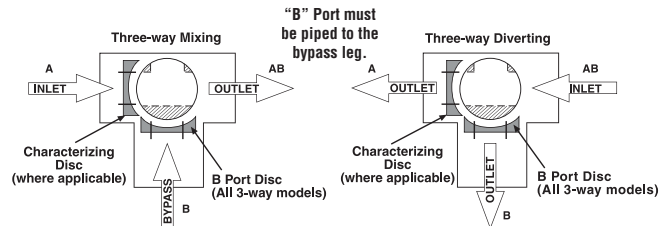

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.




## Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.

Technical Data	
Service	chilled or hot water, 60% glycol
Flow characteristic	A-port equal percentage
Controllable Flow Range	75°
Sizes	2½", 3", 4", 5", 6"
Type of end fitting	pattern to mate with ANSI 125 flange
Materials:	
Body	cast iron - GG25
Ball	stainless steel
Stem	stainless steel
Seats	PTFE
Characterizing disc	stainless steel
Packing	2 EPDM O rings, lubricated
Body pressure rating	according to ANSI 125, standard class B
Media temp. range	0°F to 248°F [-18°C to +120°C]
Close off pressure	100 psi
Maximum differential pressure (ΔP)	50 psi
Leakage	0% for A to AB
Cv rating	A-port: see product chart for values

## Dimensions

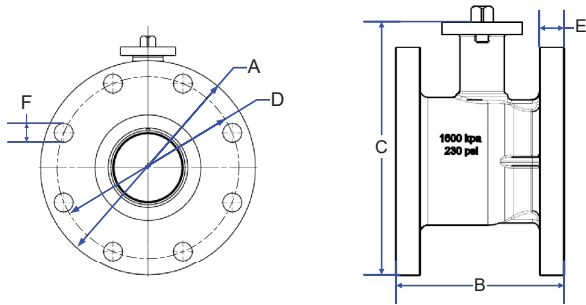

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter	Face-to-Face Length		Height
				A	B	
B6250S	2½" [65]	F05	7.50" [190.5]	5.50" [139.7]	8.10" [205.4]	
B6300S	3" [80]		8.00" [203.2]	6.60" [167.6]	8.40" [213.1]	
B6400S	4" [100]		9.00" [228.6]	8.30" [210.8]	9.30" [235.9]	
B6500S	5" [125]		10.00" [254.0]	10.30" [261.6]	10.50" [266.4]	
B6600S	6" [150]		11.00" [279.4]	12.50" [317.5]	11.70" [296.9]	


### NOTES:

- 1) Flange bolt pattern matches ANSI class 125 flanges (not ANSI/ASME rated)
- 2) Maximum allowable working pressure: 100 PSIG
- 3) It is not recommended to connect raised-face flanges to flat-faced flanges

Valve Nominal Size			Type	Suitable Actuators		
Cv	Inches	DN [mm]	2-way Flange	Non-Spring	Spring	Electronic Fail-Safe
70	2½"	65	B6250S-070	AR Series	AFR Series	
110	2½"	65	B6250S-110			
110	3"	80	B6300S-110			
186	4"	100	B6400S-186	GR Series		GKR Series
290	5"	125	B6500S-290			
400	6"	150	B6600S-400			

## Flow Pattern

### 2-way B6250 to B6600 Characterized Control Valves™

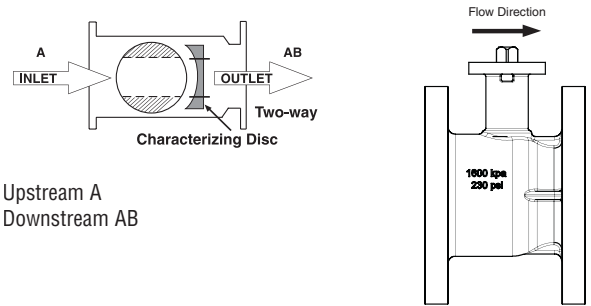

Upstream A  
Downstream AB


Bolt Circle Diameter	Flange Thickness Minimum	Bolt Hole Diameter	Number of Bolt Holes
D	E	F	
5.50" [139.7]	0.75" [19.05]	0.75" [19.05]	4
6.00" [152.4]	0.75" [19.05]	0.75" [19.05]	4
7.50" [190.5]	0.94" [23.88]	0.75" [19.05]	8
8.50" [215.9]	0.94" [23.88]	0.88" [22.35]	8
9.50" [241.3]	1.00" [25.40]	0.88" [22.35]	8

# Characterized Control Valve Product Range Overview

## B2., B3., 2-way, 3-way, Stainless Steel Ball and Stem



C <sub>v</sub>	Valve Nominal Size		Type		Suitable Actuators		
	Inches	DN [mm]	2-way NPT	3-way NPT	Non-Spring Return	Spring Return	NEMA 4X
0.3	½	15	B207(B)	B307(B)	TR Series	TFR Series	NR Series
0.46	½	15	B208(B)	B308(B)			
0.8	½	15	B209(B)	B309(B)			
1.2	½	15	B210(B)	B310(B)			
1.9	½	15	B211(B)	B311(B)			
3	½	15	B212(B)	B312(B)			
4.7	½	15	B213(B)	B313(B)			
7.4	½	15	B214(B)				
10	½	15	B215(B)	B315(B)			
14	½	15	B216(B)*	B316(B)*			
4.7	¾	20	B217(B)	B317(B)			
7.4	¾	20	B218(B)	B318(B)			
10	¾	20	B219(B)				
14	¾	20	B220(B)*				
14	¾	20		B320(B)			
24	¾	20	B221(B)*	B321(B)*			
7.4	1	25	B222	B322			
10	1	25	B223	B323			
19	1	25	B224				
30	1	25	B225*	B325*			
10	1¼	32	B229				
19	1¼	32	B230*				
10	1¼	32		B329			
19	1¼	32		B330			
25	1¼	32	B231	B331			
37	1¼	40	B232*				
19	1½	40	B238	B338			
29	1½	40	B239	B339			
37	1½	40	B240*	B340			
46	1½	40		B341			
29	2	50	B248	B347			
37	2	50		B348			
46	2	50	B249	B349			
57	2	50	B250*	B350			
65	2	50	B251				
68	2	50		B351			
83	2	50		B352			
85	2	50	B252				
120	2	50	B253				
240	2	50	B254*				



### Mode of Operation

The Characterized Control Valve is operated by a rotary actuator. The actuators are controlled by a standard voltage for on/off control or a proportional signal or 3-point control system which move the ball of the valve to the position dictated by the control system.

### Product Features

The equal-percentage characteristic of the flow is ensured by the integral characterizing disc. This characteristic provides linear heating or cooling output from the coil improving energy efficiency and comfort.

### Actuator Specifications

Control type	on/off, floating point, 2-10 VDC, multi-function technology (MFT)
Manual override	TR, LR, AR, NR, AFR series
Electrical connection	3 ft [1m] cable with ½" conduit fitting or covered screw terminal strip

### Valve Specifications

Service	chilled or hot water, 60% glycol
Flow characteristic	A-port equal percentage B-port modified for constant common port flow
Controllable flow range	75°
Sizes	½" - 2"
Type of end fitting	NPT female ends

### Materials

Body	forged brass, nickel plated
Ball	stainless steel or chrome
Stem	stainless steel or chrome
Seats	Teflon® PTFE

Characterizing disc	
½" - 1 ½" (2-way)	Tefzel®
½" - 1" (3-way)	Tefzel®
2" (2-way)	stainless steel
1¼" - 2" (3-way)	stainless steel

Packing 2 EPDM O-rings, lubricated

Media temp range 0°F to 250°F [-18°C to 120°C]

Body pressure rating	
½" - 1¼" (B230)	600 psi
1¼" (B231) - 2" (B251)	400 psi

Close-off pressure 200 psi

Maximum differential pressure (ΔP) 50 psi


Leakage 0% for A to AB  
< 2.0% for B to AB

C<sub>v</sub> rating/GPM A port: see product chart above for values  
B port: 70% of A to AB C<sub>v</sub>

Tefzel® and Teflon® are registered trademarks of DuPont

\* Models without characterizing discs. (B) Models with chrome plated brass ball and brass stem  
\* 3-Way Valves not for use in change over applications

C <sub>v</sub>	Valve Nominal Size		Type	Suitable Actuators		
	Inches	DN [mm]		2-way NPT	Non-Spring Return	Spring Return
70	2½	65	B6250S-070			
110	2½	65	B6250S-110	AR	AFR	
110	3	80	B6300S-110			
186	4	100	B6400S-186			
290	5	125	B6500S-290		GR	
400	6	150	B6600S-400			GKR



### Applications

Water-side control of heating and cooling systems for AHU supply, cooling towers and chillers.

### Mode of Operation

The Characterized Control Valve is operated by a rotary actuator. The actuators are controlled by a standard voltage for on/off control or a proportional signal or 3-point control system which move the ball of the valve to the position dictated by the control system.

### Product Features

The equal-percentage characteristic of the flow is ensured by the integral characterizing disc. This characteristic provides linear heating or cooling output from the coil improving energy efficiency and comfort.

### Actuator Specifications

Control type	On/Off, Floating Point, 2-10 VDC, Multi-Function Technology (MFT)
Manual override	AR, GR, AFR and GKR series
Electrical connection	3 ft [1m] cable with ½" conduit fitting or covered screw terminal strip

### Valve Specifications

Service	chilled or hot water, 60% glycol
Flow characteristic	A-port equal percentage
Action	max 90° rotation
Sizes	2½", 3", 4", 5-, 6"
Type of end fitting	ANSI 125 flange pattern
<b>Materials</b>	
Body	cast iron (painted)
Ball	stainless steel
Stem	stainless steel
Seats	PTFE
Characterizing disc	stainless steel
Packing	2 EPDM O-rings, lubricated
Body pressure rating	According to ANSI 125, standard class B
Media temp range	0°F to 250°F [-18°C to +120°C]
Close-off pressure	100 psi
Maximum differential pressure (ΔP)	50 psi
Leakage	0% for A to AB

# TR24-3 Actuators, On-Off, Floating Point



## Models

### TR24-3-T US


TR24-3 US	TR24-3-T US with 3 ft plenum rated cable
TR24-3/300 US	TR24-3-T US with 10 ft plenum rated cable
TR24-3/500 US	TR24-3-T US with 16 ft plenum rated cable

## Technical Data

Control	on/off, floating point
Nominal voltage	24 VAC 50/60 Hz
Nominal voltage range	19.2...28.8 VAC
Power consumption	1 W
Transformer sizing	1VA (class 2 power source)
Electrical connection	screw terminals accessible after removal of small cover (3 ft, 10 ft, 16 ft cables optional)
Input impedance	0.36 kΩ
Angle of rotation	90°
Position indication	integrated into handle
Manual override	push down handle
Running time	90 seconds @ 60 hz, 108 seconds @ 50 hz
Humidity	5 to 95% non-condensing
Ambient temperature	-22°F to 122°F (-30°C to 50°C)
Storage temperature	-40°F to 176°F (-40°C to 80°C)
Housing	NEMA 1/IP40
Housing rating	UL94-5V(B)
Agency listing†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	max. 35 db (A)
Quality standard	ISO 9001


† Rated impulse voltage 330V, Control pollution degree 2, Type of action 1

## Dimensions with 2-Way Valve

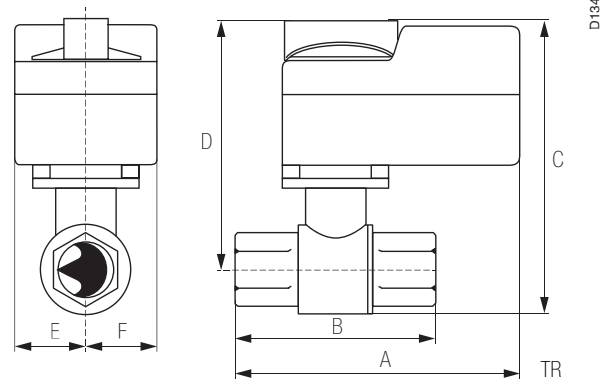

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	½"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	½"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B221(B)	¾"	20	2.73" [69.3]	1.87" [47.4]

## Dimensions with 3-Way Valve

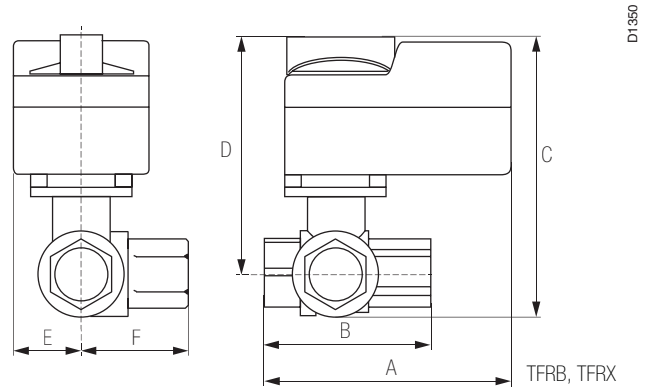

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B321(B)	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.




### Wiring Diagrams

#### ✂️ INSTALLATION NOTES

- 2 The common connection from the actuator must be connected to the Hot connection of the controller.
- 3 Actuators with plenum rated cable do not have numbers on wires; use color codes instead.
- 4 The actuator Hot must be connected to the control board Hot.

**⚠️ WARNING Live Electrical Components!**  
 During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

**NOTE: TR24-3(-T) US cannot be wired in parallel with themselves or any other actuator.**

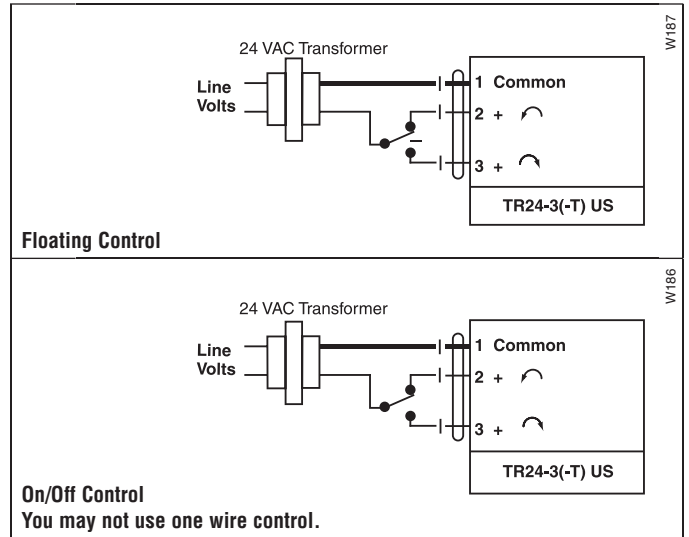

# TR24-SR Actuators, Proportional



## Models

### TR24-SR-T US

- TR24-SR US TR24-SR-T US with 3 ft plenum rated cable
- TR24-SR/300 US TR24-SR-T US with 10 ft plenum rated cable
- TR24-SR/500 US TR24-SR-T US with 16 ft plenum rated cable


## Technical Data

Control	proportional
Nominal voltage	24 VAC 50/60 Hz, 24 VDC
Nominal voltage range	19.2...28.8 VAC, 21.6...28.8 VDC
Power consumption	0.5 W
Transformer sizing	1VA (class 2 power source)
Electrical connection	screw terminals accessible after removal of small cover (3 ft, 10 ft, 16 ft cables optional)
Input impedance	100 kΩ
Angle of rotation	90°
Direction of rotation	reversible with switch under cover
Position indication	integrated into handle
Manual override	push down handle
Running time	90 seconds
Humidity	5 to 95% non-condensing
Ambient temperature	-22°F to 122°F (-30°C to 50°C)
Storage temperature	-40°F to 176°F (-40°C to 80°C)
Housing	NEMA 1/IP40
Housing rating	UL94-5V(B)
Agency listing†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	max. 35 db (A)
Quality standard	ISO 9001

† Rated impulse voltage 500V, Control pollution degree 2, Type of action 1


**NOTE:** Response sensitivity is 75mV

## Dimensions with 2-Way Valve

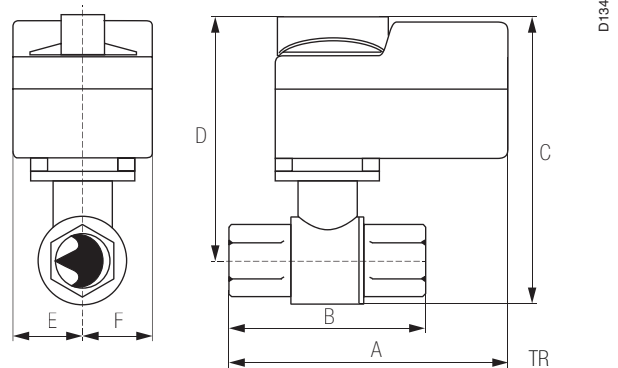

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	½"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	½"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B221(B)	¾"	20	2.73" [69.3]	1.87" [47.4]

## Dimensions with 3-Way Valve

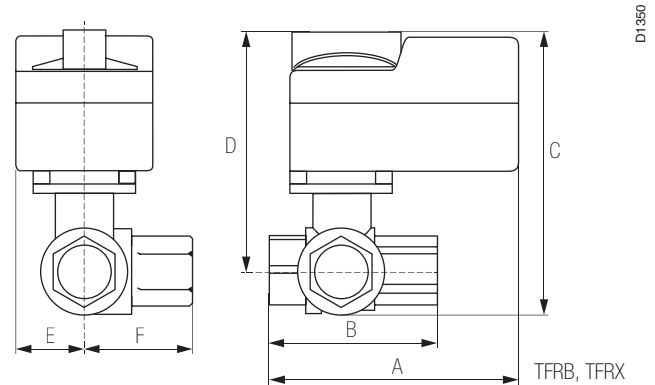

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B321(B)	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]

### Wiring Diagrams

#### ✂️ INSTALLATION NOTES

△<sup>2</sup> Actuators with color coded wires are optional. Wire numbers are provided for reference.


**CAUTION Equipment damage!**

Actuators may be connected in parallel. Power consumption and input impedance must be observed.


△<sup>3</sup> Actuators may also be powered by 24 VDC.

**⚠️ WARNING Live Electrical Components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

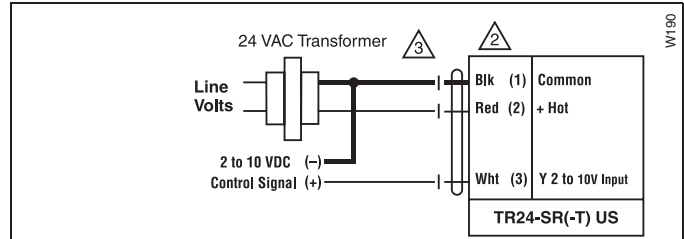


2 to 10 VDC Control of TR24-SR(-T) US

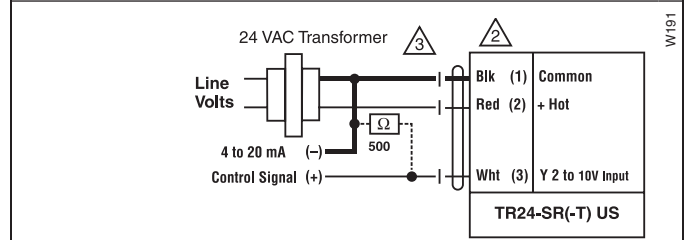

4 to 20 mA Control of TR24-SR(-T) US

Direct/Reverse acting switch is under wiring cover.  
 R = CW with decrease in signal  
 L = CCW with decrease in signal  
 No feedback

# LR...24-3 Actuators, On/Off, Floating Point

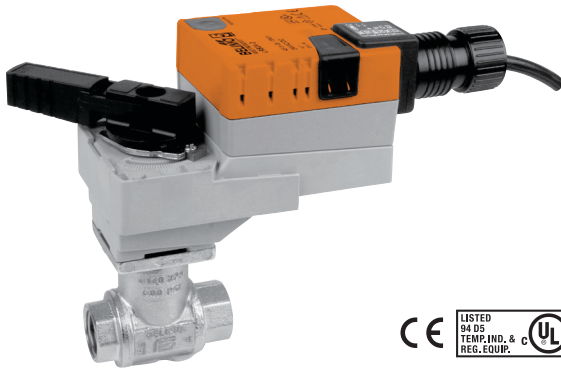

## Models

LRB24-3-T	LRX24-3-T	w/Terminal Block
LRB24-3	LRX24-3	w/3 ft. cable
LRB24-3-S	LRX24-3-S	w/built-in Aux. Switch


Technical Data	
Control	on/off, floating point
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 1.5 W holding 0.2 W
Transformer sizing	2 VA (class 2 power source)
Electrical connection	½" conduit connector 18 GA, plenum rated cable
LRB24-3 LRX24-3	3 ft [1m] 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	600 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with protected  switch
Position indication	handle
Manual override	external push button
Running time	
LRB24-3 LRX24-3	90 seconds, constant independent of load 150, 95, 60, 45, 35 seconds, constant independent of load
Humidity	5 to 95% RH, non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing type	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	less than 35 dB (A)
Quality standard	ISO 9001

LR...24-3-T	
Electrical connection	screw terminal (for 26 to 14 GA wire) protected (NEMA 2, IP20)

LR...24-3-S	
Auxiliary switch	1 SPDT, 3A (0.5A) @ 250 VAC, UL Listed, adjustable 0° to 100°


† Rated impulse voltage 800V, Control pollution degree 3, Type of action 1 (1.B for -S models)

## Dimensions with 2-Way Valve

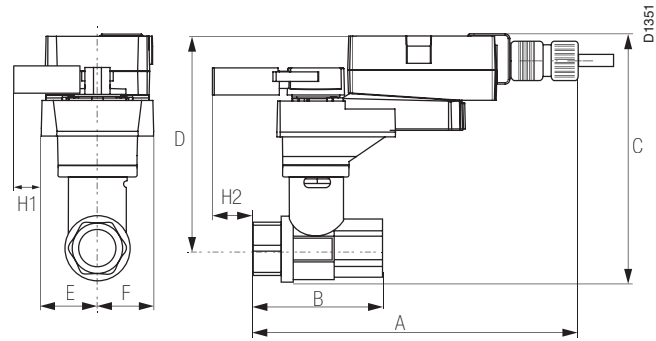

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	½"	15	1.39" [35.2]	1.39" [35.2]
B212(B)-B215(B)	½"	15	1.78" [45.2]	1.78" [45.2]
B217(B)-B221(B)	¾"	20	1.87" [47.4]	1.87" [47.4]
B222-B225	1"	25	1.87" [47.4]	1.87" [47.4]
B229-B231	1¼"	32	1.87" [47.4]	1.87" [47.4]

## Dimensions with 3-Way Valve

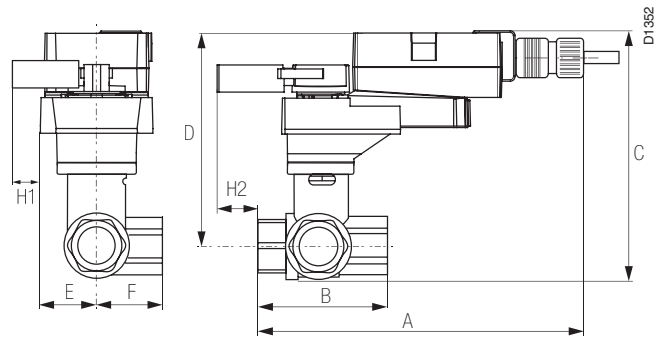

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	½"	15	2.06" [52.2]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B321(B)	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams

#### ✂️ INSTALLATION NOTES



#### **CAUTION** Equipment damage!

Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.



Actuators are provided with color coded wires.

Wire numbers are provided for reference.



Actuators may also be powered by 24 VDC.



#### **APPLICATION NOTES**




Meets cULus or UL and CSA requirements without the need of an electrical ground connection.




#### **WARNING** Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

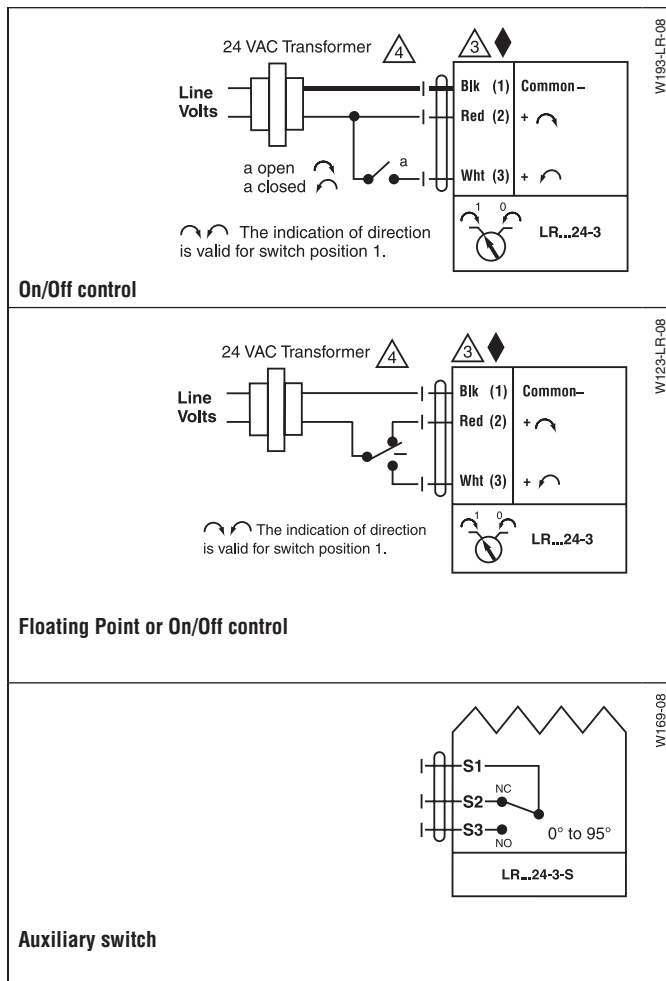

# LR...24-SR Actuators, Proportional

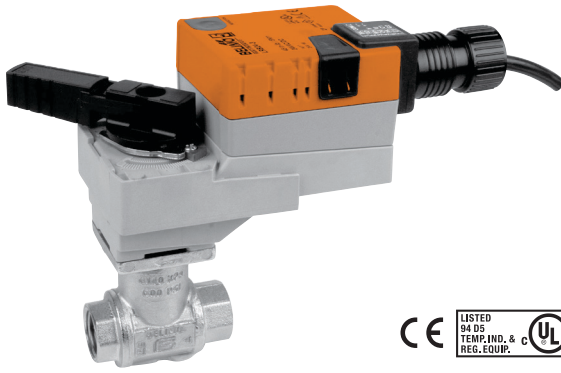

## Models

LRB24-SR-T	LRX24-SR-T	w/Terminal Block
LRB24-SR	LRX24-SR	w/3ft. cable

## Technical Data


Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 1.5 W holding 0.4 W
Transformer sizing	3 VA (class 2 power source)
Electrical connection	1/2" conduit connector 18 GA, plenum rated cable 3 ft [1m] LRB24-SR LRX24-SR 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0° to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20 mA
Feedback output U	1 to 10 VDC, max 0.5 mA
Input impedance	100 kΩ (0.1 mA), 500 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with protected $\curvearrowright$ / $\curvearrowleft$ switch
Position indication	handle
Manual override	external push button
Running time	constant independent of load LRB24-SR 90 seconds LRX24-SR 150, 95, 60, 45, 35 seconds
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<35 dB(A)
Quality standard	ISO 9001

## LR...24-SR-T

Electrical connection	screw terminal (for 26 to 14 GA wire) protected (NEMA 2/IP20)
-----------------------	--


† Rated impulse voltage 800V, Control pollution degree 3, Type of action 1 (1.B for -S models)

## Dimensions with 2-Way Valve

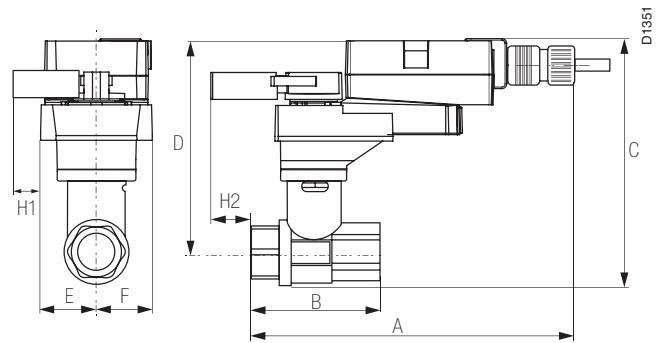

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	1/2"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	1/2"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B221(B)	3/4"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B231	1 1/4"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

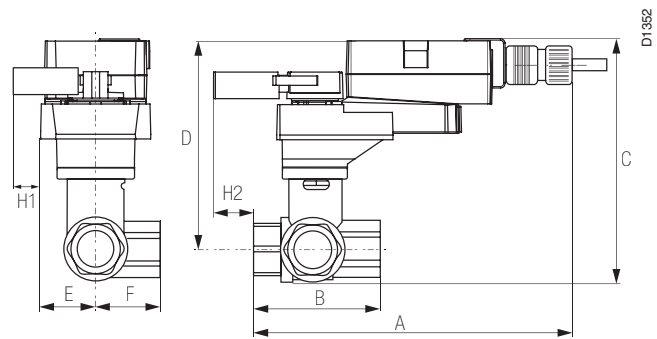

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	1/2"	15	2.06" [52.2]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	1/2"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B321(B)	3/4"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams


#### ✂️ INSTALLATION NOTES

- ⚠️ **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- ⚠️ **3** Actuators may also be powered by 24 VDC.
- ⚠️ **5** Only connect common to neg. (-) leg of control circuits.


#### 📄 APPLICATION NOTES

- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.
- ◆ The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.

⚠️ **WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

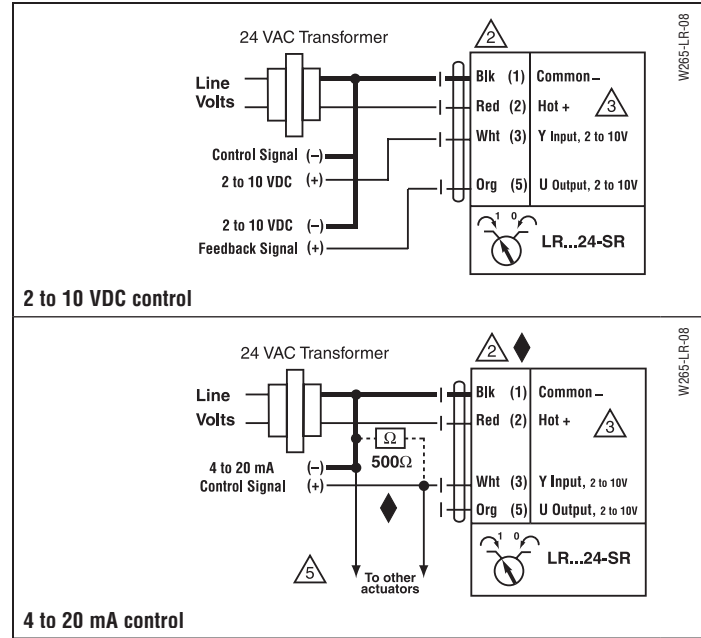

# LR...120-3 Actuators, On/Off, Floating Point

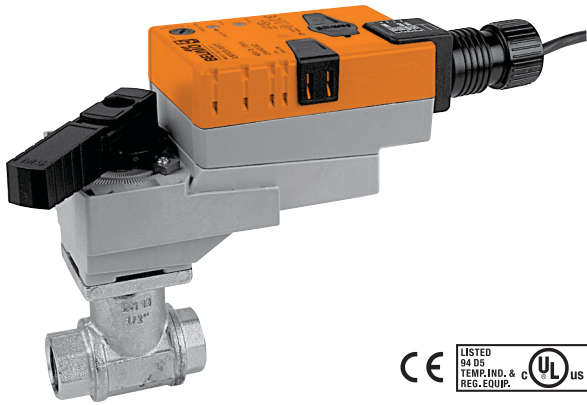


## Models

LRB120-3  
LRX120-3

Technical Data	
Control	On/Off, Floating Point
Power supply	100 to 240 VAC, 50/60 Hz (nominal) 85 to 265 VAC, 50/60 Hz (tolerance)
Power consumption	running 2 W
	holding 0.5 W
Transformer sizing	4 VA (class 2 power source)
Electrical connection	1/2" conduit connector 18 GA, plenum rated cable
	LRB120-3 3 ft [1m] LRX120-3 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	600 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with protected  switch
Position indication	handle
Manual override	external push button
Running time	LRB120-3 90 seconds, constant independent of load
	LRX120-3 150, 95, 60, 45, 35 seconds, constant independent of load
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<35 dB(A)
Quality standard	ISO 9001


† Rated impulse voltage 4kV, Control pollution degree 3, Type of action 1

## Dimensions with 2-Way Valve

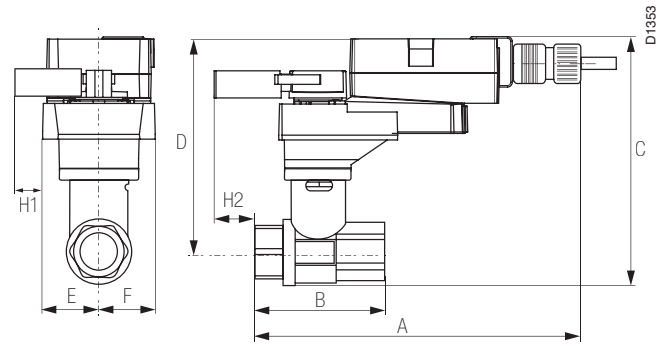

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	1/2"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	1/2"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B221(B)	3/4"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1 1/4"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

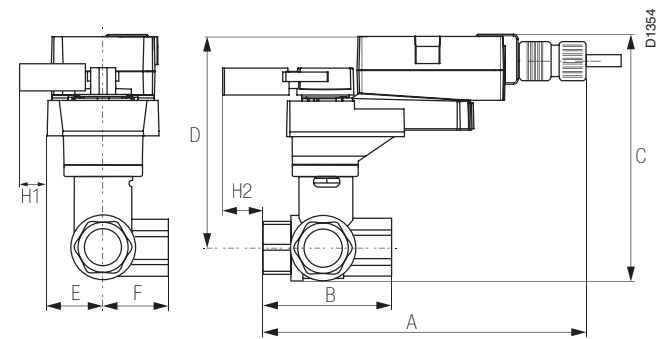

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	1/2"	15	2.06" [52.2]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	1/2"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B321(B)	3/4"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]



### Wiring Diagrams

#### ✂️ INSTALLATION NOTES



#### **CAUTION** Equipment damage!

Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.



#### **APPLICATION NOTES**




Meets cULus or UL and CSA requirements without the need of an electrical ground connection.




#### **WARNING** Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

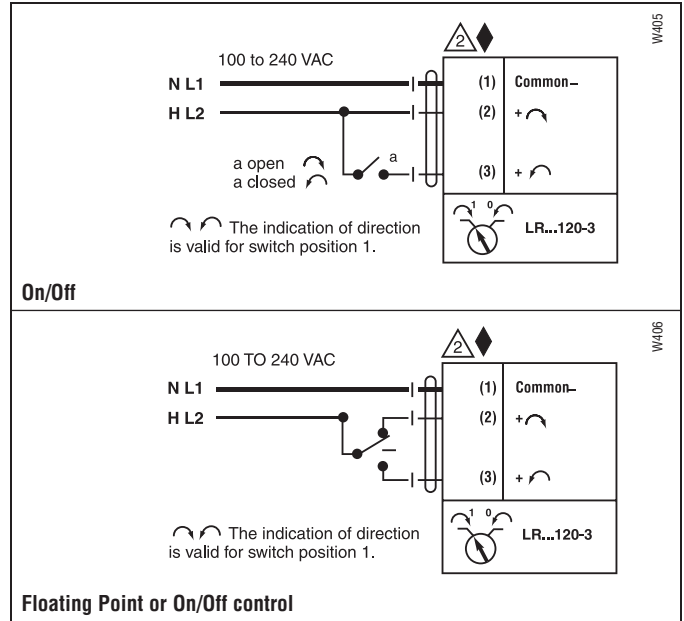

# LR...120-SR Actuators, Proportional

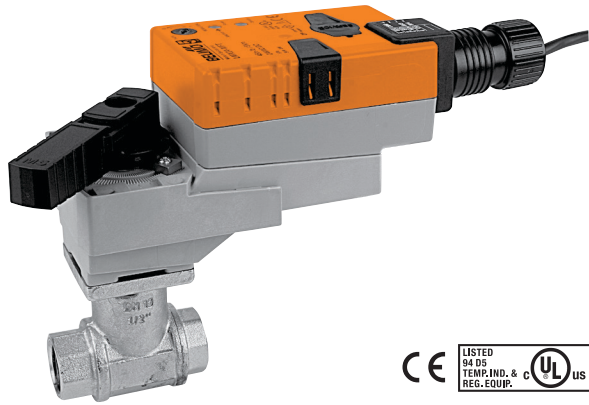


## Models

LRB120-SR  
LRX120-SR

Technical Data	
Power supply	100 to 240 VAC, 50/60 Hz (nominal) 85 to 265 VAC, 50/60 Hz (tolerance)
Power consumption	running 2.5 W holding 1 W
Transformer sizing	4.5 VA (class 2 power source)
Electrical connection	1/2" conduit connector 18 GA, plenum rated cable 3 ft [1m] LRB120-SR LRX120-SR 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0° to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20 mA
Feedback output U	1 to 10 VDC, max 0.5 mA
Input impedance	100 kΩ (0.1 mA), 500 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with protected  switch
Position indication	handle
Manual override	external push button
Running time	constant independent of load
LRB120-SR	90 seconds
LRX120-SR	150, 95, 60, 45, 35 seconds
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<35 dB(A)
Quality standard	ISO 9001


† Rated impulse voltage 4kV, Control pollution degree 3, Type of action 1

## Dimensions with 2-Way Valve

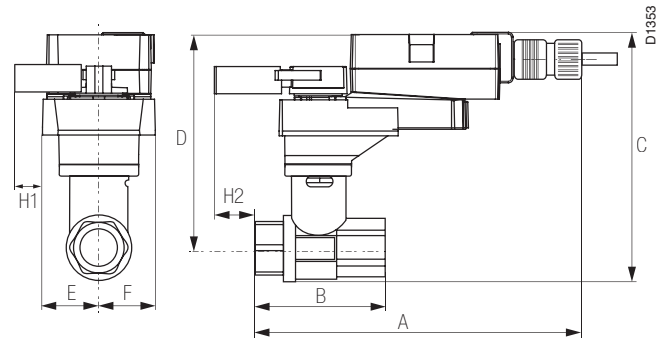

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	1/2"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	1/2"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B221(B)	3/4"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1 1/4"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

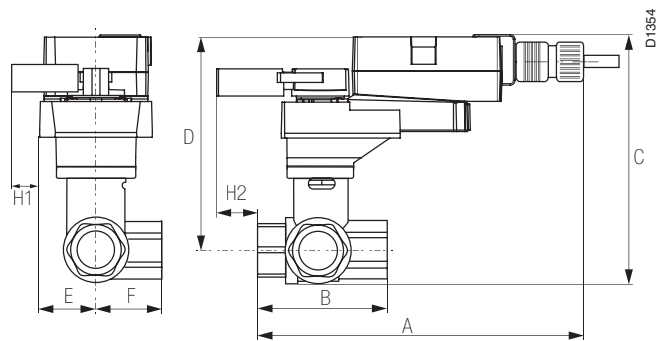

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	1/2"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	1/2"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B321(B)	3/4"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams

#### ✂️ INSTALLATION NOTES


- ⚠️ **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- ⚠️ Only connect common to neg. (-) leg of control circuits.
- ⚠️ A 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC.
- ⚠️ LRB(X) can be supplied with both 120 VAC and 230 VAC.
- ⚠️ All 120 VAC and 230 VAC actuators use appliance rated cables.


#### 📄 APPLICATION NOTES

- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

#### ⚠️ WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

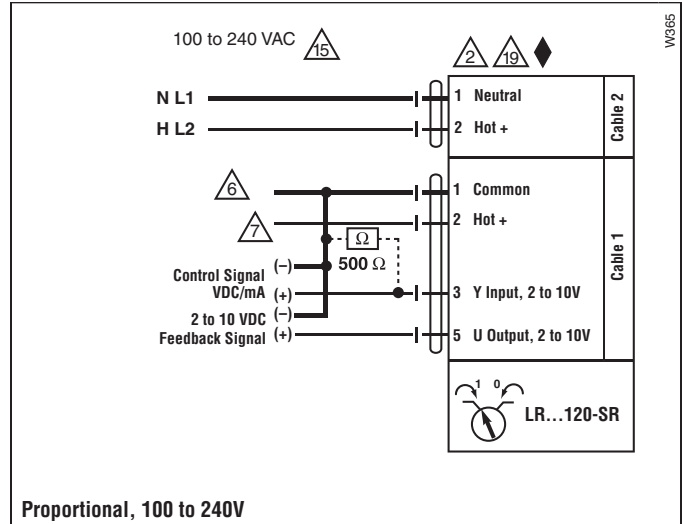

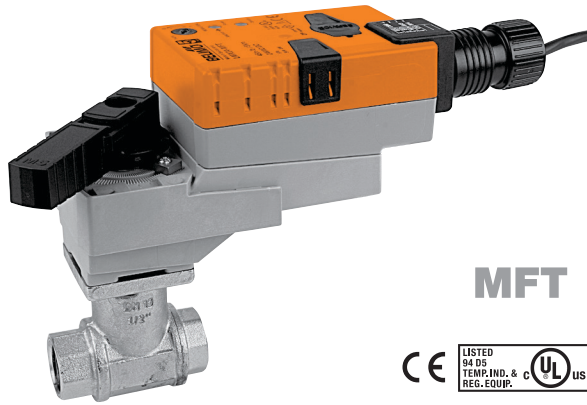

**MFT**




## Models

LRX24-MFT Flexible Version

Technical Data	
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 2 W holding 1.2 W
Transformer sizing	6 VA (class 2 power source)
Electrical connection	½" conduit connector 18 GA, plenum rated cable LRX24-MFT 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0° to 95° rotation
Operating range Y	2 to 10 VDC (default) 4 to 20 mA variable (VDC, PWM, floating point, on/off)
Feedback output U	2 to 10 VDC, 0.5mA max VDC variable
Input impedance	100 kΩ (0.1 mA), 500 Ω 1500 Ω (PWM, floating point, on/off)
Angle of rotation	90° electronically variable adjustable with mechanical stop
Direction of rotation	reversible with protected  switch
Position indication	handle
Manual override	external push button
Running time	150 seconds (default) Variable (35 to 150 secs)
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<35 dB(A)
Quality standard	ISO 9001


† Rated impulse voltage 800V, Control pollution degree 3,  
Type of action 1 (1.B for -S models)

### Dimensions with 2-Way Valve

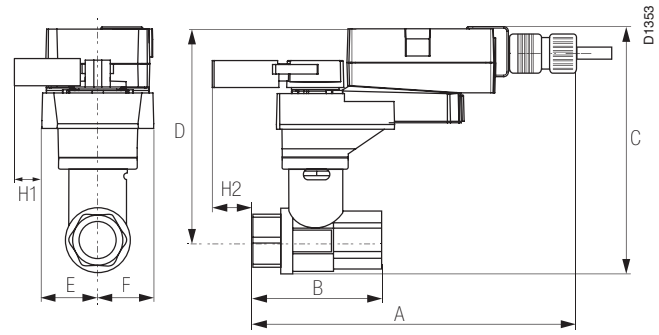

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

### Dimensions with 3-Way Valve

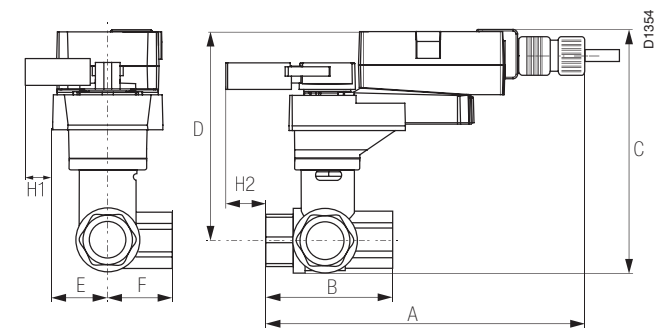

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

**Wiring Diagrams**

**INSTALLATION NOTES**





- 2** **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3** Actuators may also be powered by 24 VDC.
- 4** Position feedback cannot be used with Triac sink controller.  
The actuator internal common reference is not compatible.
- 6** Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.
- 8** Contact closures A & B also can be triacs.
- 8** A & B should both be closed for triac source and open for triac sink.
- 9** For triac sink the common connection from the actuator must be connected to the hot connection.


**APPLICATION NOTES**

- ◆** The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.

**! WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

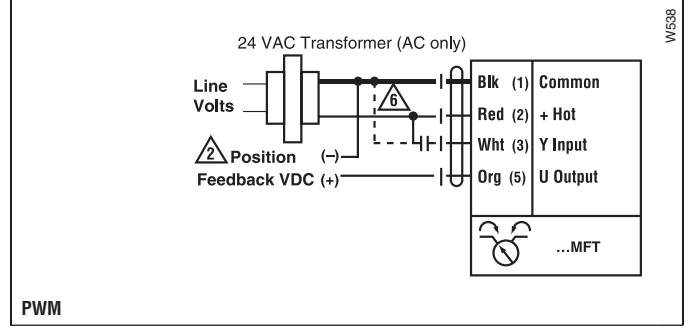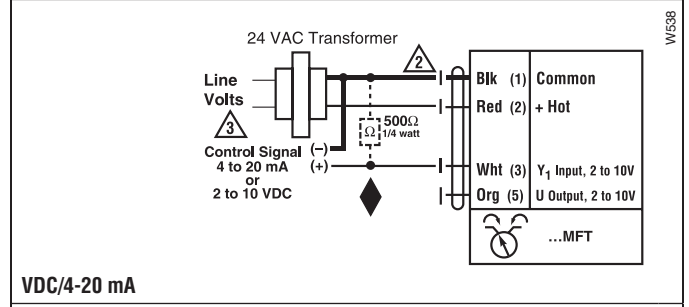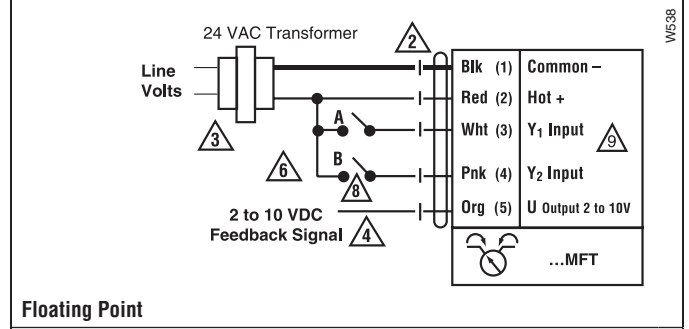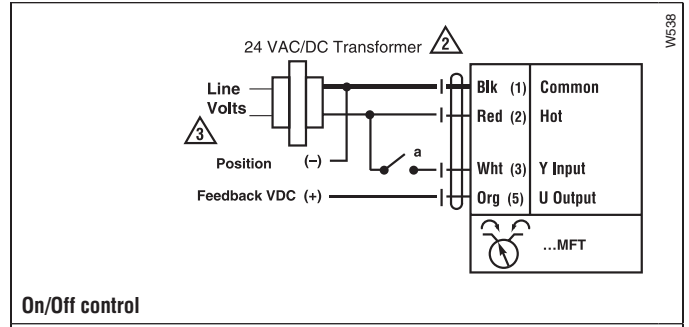

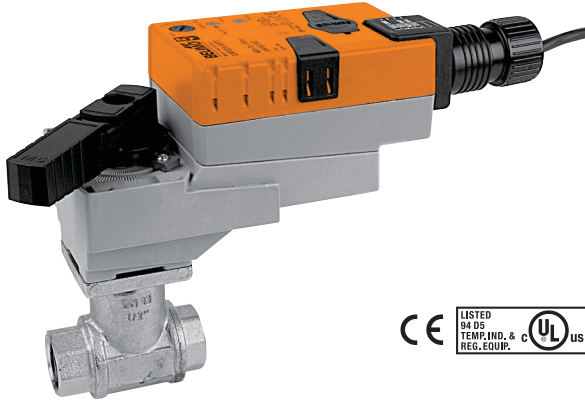


## Models

LRX24-PC


Technical Data	
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 2 W holding 1.2 W
Transformer sizing	5 VA (Class 2 power source)
Electrical connection	½" conduit connector 18 GA plenum rated cable 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Operating range Y	0 to 20V phasecut
Feedback output U	2 to 10 VDC, 0.5mA max
Input impedance	8 kΩ (50 mW)
Angle of rotation	90°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with  switch
Position indication	handle
Manual override	external push button
Running time	150 seconds (default)
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<35 dB(A)
Quality standard	ISO 9001

## Dimensions with 2-Way Valve

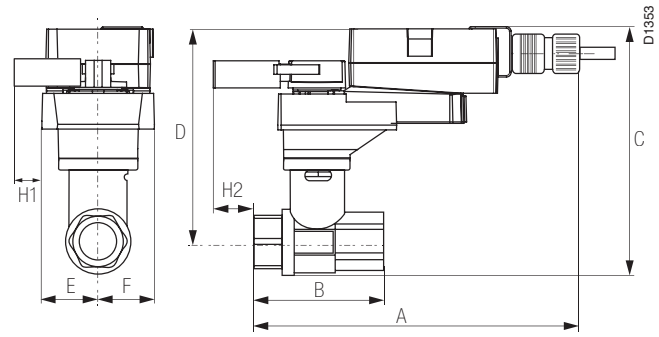

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

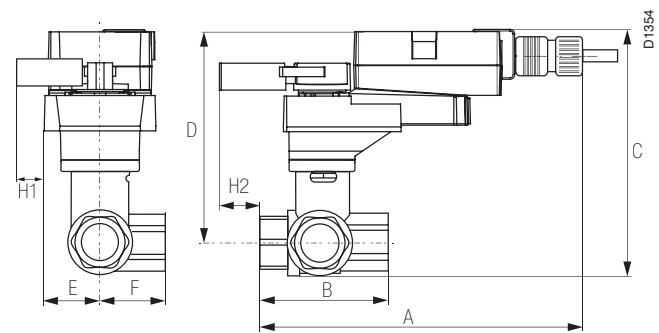

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

## Wiring Diagrams


### INSTALLATION NOTES

Provide overload protection and disconnect as required.


**CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.

Actuators may also be powered by 24 VDC.

**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

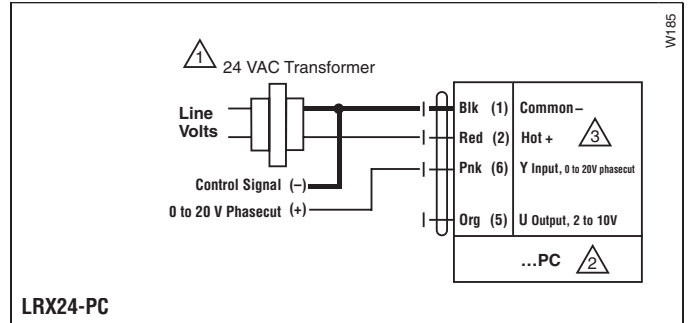

# LRX24-MFT95 Actuators, 0 to 135 Ω, Proportional

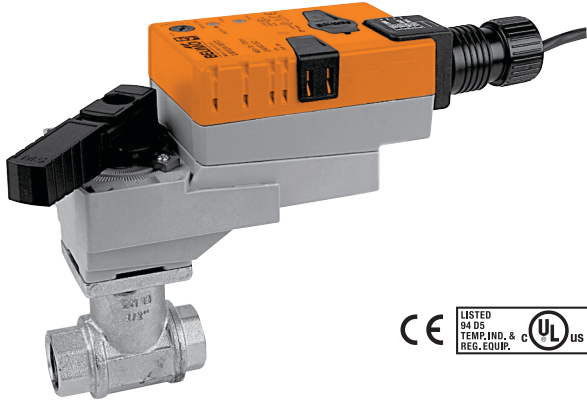


## Models

LRX24-MFT95

Technical Data	
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 2 W holding 1.2 W
Transformer sizing	5 VA (Class 2 power source)
Electrical connection	½" conduit connector 18 GA plenum rated cable 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Operating range WRB	0 to 135 Ω Honeywell Electronic Series 90, 0 to 135 Ω input
Feedback output U	2 to 10 VDC, 0.5mA max
Input impedance	100 kΩ (0.1 mW)
Angle of rotation	90°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with  switch
Position indication	handle
Manual override	external push button
Running time	150 seconds (default) variable (35 to 150 seconds)
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<35 dB(A)
Quality standard	ISO 9001


†Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3.

## Dimensions with 2-Way Valve

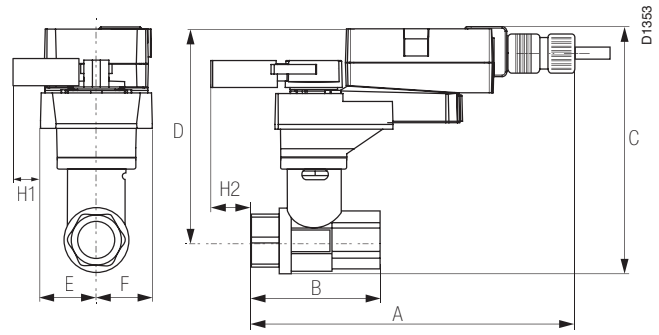

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

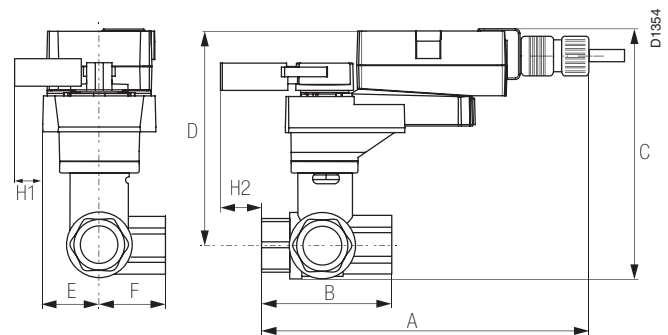

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.



### Wiring Diagrams

#### INSTALLATION NOTES


- 21 Provide overload protection and disconnect as required.
- 22 Actuators and controller must have separate transformers.
- 23 Consult controller instruction data for more detailed information.
- 24 Resistor value depends on the type of controller and the number of actuators. No resistor is used for one actuator. Honeywell® resistor kits may also be used.
- 25 To reverse control rotation, use the reversing switch. 2524232221

**WARNING Live Electrical Components!** During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.


P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

Switch A	Switch B	Damper Position
		Damper Open
		Damper Closed


The direction of rotation switch is set so that the fail safe position and the position of the damper is closed with no signal at wire R.

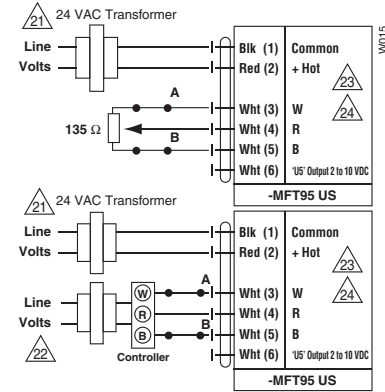


Override

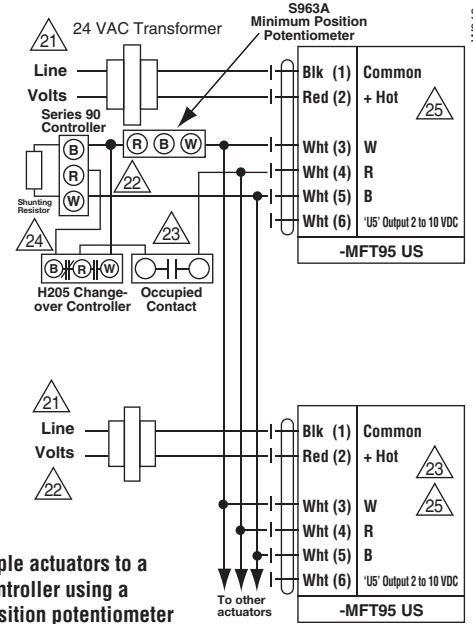

Wiring multiple actuators to a Series 90 controller using a minimum position potentiometer

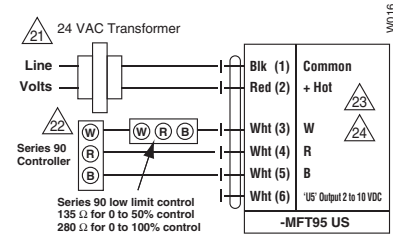


Low Limit Control

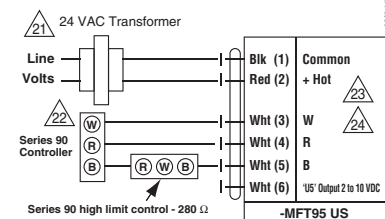

High Limit Control

# LRQ...24-1 Quick Running Actuators, On/Off

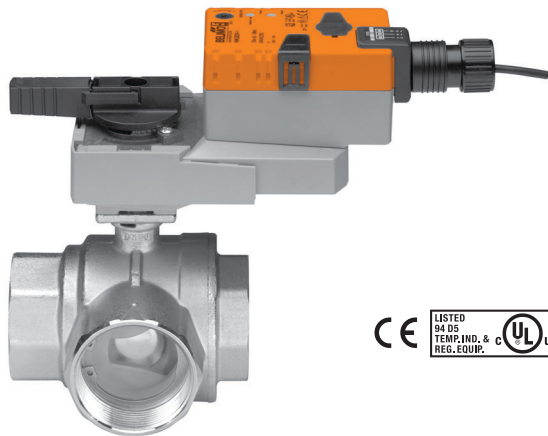


## Models

LRQB24-1 Basic Version  
LRQX24-1 Flexible Version

## Technical Data


Control	on/off
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 12 W holding 1.5 W
Transformer sizing	18 VA (Class 2 power source) 20A @ 5ms max
Electrical connection	½" conduit connector 18 GA plenum rated cable
	LRQB24-1 3 ft [1m] LRQX24-1 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Input impedance	600 Ω
Angle of rotation	max 95°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	handle
Manual override	external push button
Running time	5 seconds
LRQB24-1	constant of independent load
LRQX24-1	5 or 10 seconds constant of independent load
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<52 dB(A)
Quality standard	ISO 9001

## Dimensions with 2-Way Valve

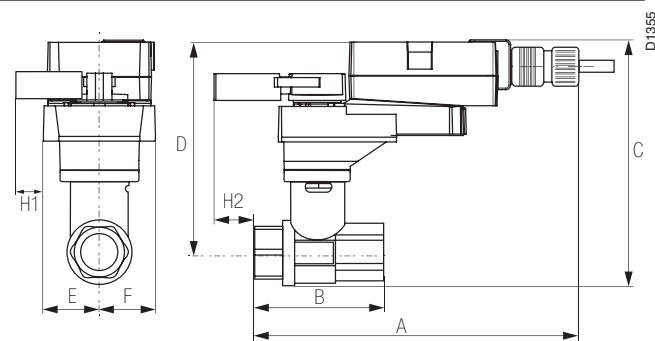

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

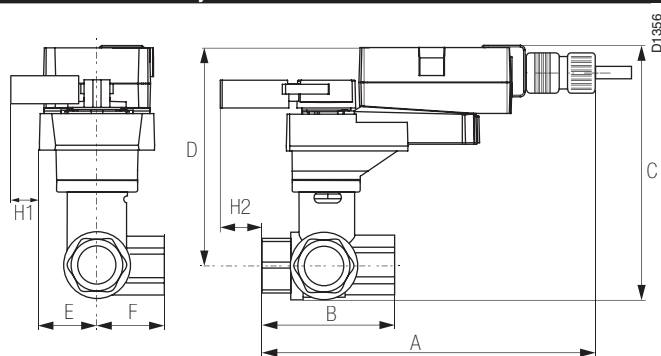

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams

#### ✂️ **INSTALLATION NOTES**


- 1 Provide overload protection and disconnect as required.
- 3 Actuators may also be powered by 24 VDC.


#### 📄 **APPLICATION NOTES**

- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

#### ⚠️ **WARNING Live Electrical Components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

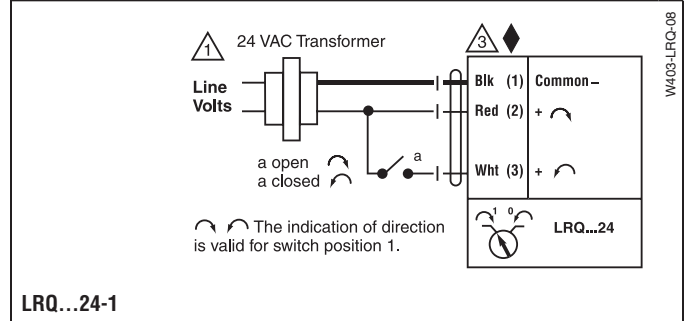

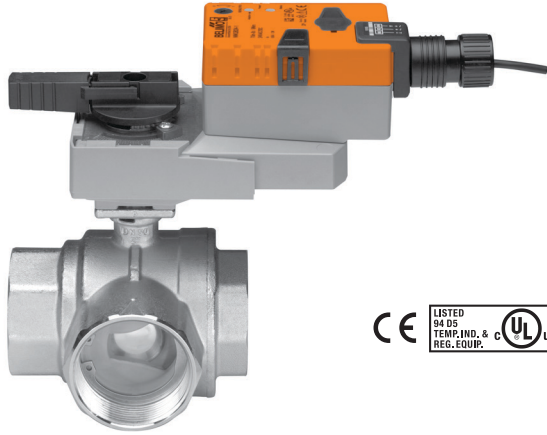


## Models

LRQB24-MFT Basic Version  
LRQX24-MFT Flexible Version

### Technical Data


Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 12 W holding 1.5 W
Transformer sizing	18 VA (Class 2 power source) 20A @ 5ms max
Electrical connection	½" conduit connector 18 GA plenum rated cable LRQB24-MFT 3 ft [1m] LRQX24-MFT 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20 mA (default) variable (VDC, on/off)
Feedback output U	2 to 10 VDC, 0.5mA max VDC variable
Input impedance	100 kΩ (0.1 mA), 500 Ω 1500 Ω (on/off)
Angle of rotation	max 95°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	reflective visual indicator (snap-on)
Manual override	external push button
Running time	LRQB24-MFT 5 seconds constant of independent load LRQX24-MFT 5 or 10 seconds constant of independent load
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<52 dB(A)
Quality standard	ISO 9001

### Dimensions with 2-Way Valve

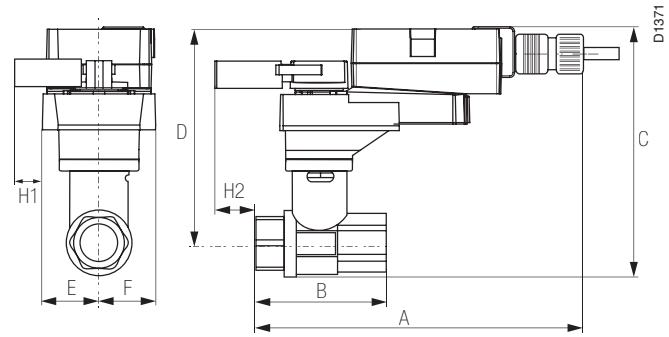

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

### Dimensions with 3-Way Valve

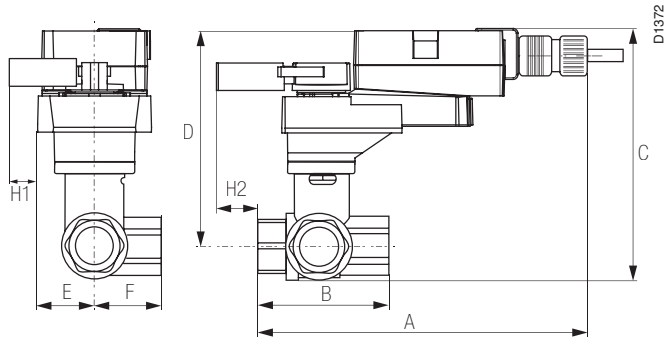

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

### Wiring Diagrams


#### ✂️ INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 5 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.


#### 📄 APPLICATION NOTES

- ◆ The ZG-R01 500 Ω resistor may be used.

**⚠️ WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

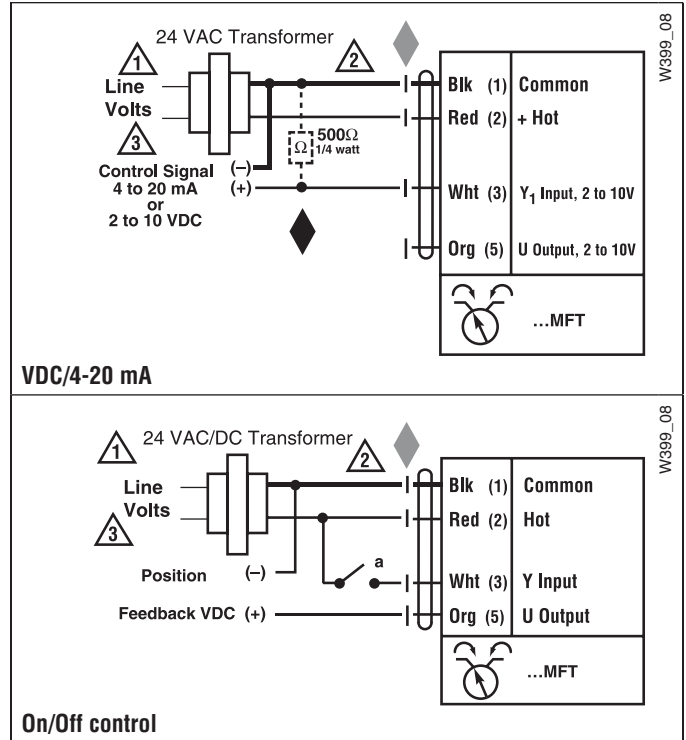

# NRQ...24-1 Quick Running Actuators, On/Off

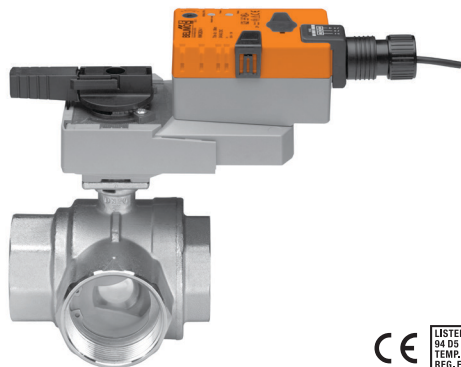

## Models


NRQB24-1 Basic Version  
NRQX24-1 Flexible Version

### Technical Data

Control	on/off
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 12 W holding 1.5 W
Transformer sizing	18 VA (Class 2 power source)
Electrical connection	½" conduit connector, 18 GA plenum rated cable
NRQB24-1	3 ft [1m]
NRQX24-1	3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Input impedance	600 Ω
Angle of rotation	max 95°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	reflective visual indicator (snap-on)
Manual override	external push button
Running time	constant of independent load
NRQB24-1	5 seconds
NRQX24-1	5, 10 or 15 seconds
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<52 dB(A)
Quality standard	ISO 9001


Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3.

### Dimensions with 2-Way Valve

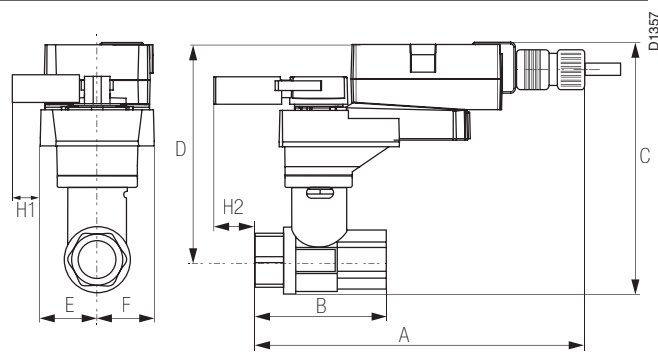

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107]	2.27" [57.7]

### Dimensions with 3-Way Valve

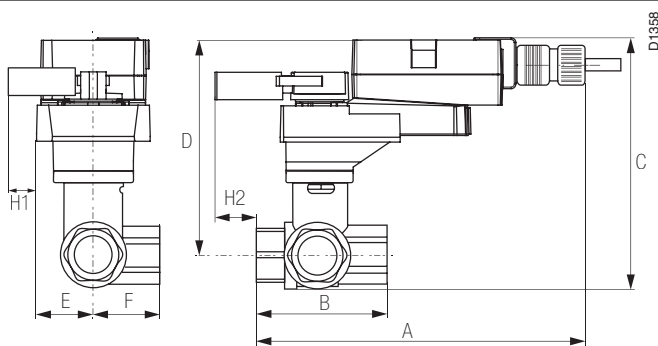

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams

#### ✂️ **INSTALLATION NOTES**


- 1 Provide overload protection and disconnect as required.
- 3 Actuators may also be powered by 24 VDC.


#### 📄 **APPLICATION NOTES**

- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

#### ⚠️ **WARNING Live Electrical Components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

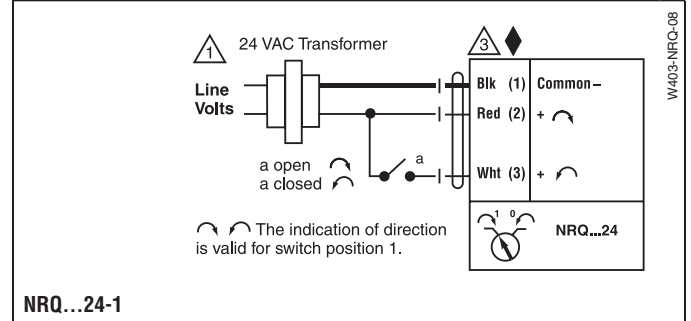

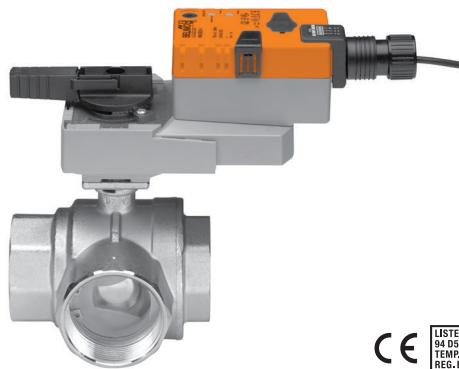

## Models


- NRQB24-MFT Basic Version
- NRQX24-MFT Flexible Version

### Technical Data

Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 12 W holding 1.5 W
Transformer sizing	18 VA (Class 2 power source)
Electrical connection	½" conduit connector, 18 GA plenum rated cable 3 ft [1m] NRQB24-MFT NRQX24-MFT 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20 mA (default) variable (VDC, on/off)
Feedback output U	2 to 10 VDC, 0.5mA max VDC variable
Input impedance	100 kΩ (0.1 mA), 500 Ω, 1500 Ω (on/off)
Angle of rotation	max 95°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with  switch
Position indication	reflective visual indicator (snap-on)
Manual override	external push button
Running time	constant of independent load NRQB24-MFT 5 seconds NRQX24-MFT 5, 10 or 15 seconds
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<52 dB(A)
Quality standard	ISO 9001


Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3.

### Dimensions with 2-Way Valve

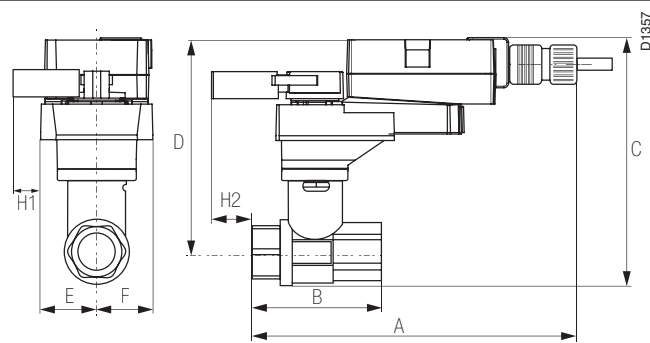

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107]	2.27" [57.7]

### Dimensions with 3-Way Valve

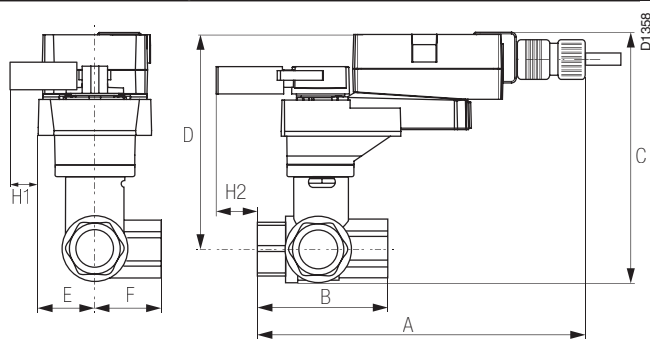

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]



### Wiring Diagrams

#### ✂️ INSTALLATION NOTES


- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 5 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.

#### 📄 APPLICATION NOTES

- ◆ The ZG-R01 500 Ω resistor may be used.

#### ⚠️ WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

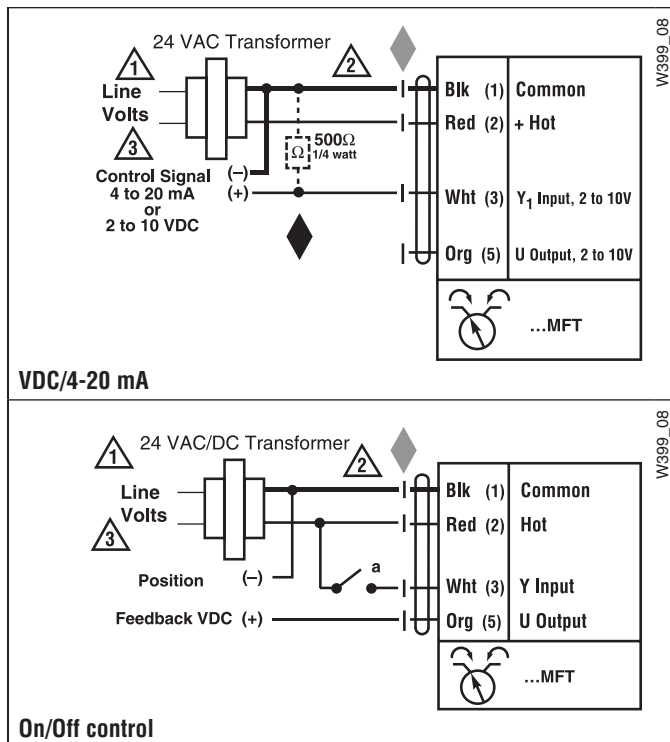



## Models

NRB24-3-T N4	
NRB24-3-T N4H	w/built in heater
NRX24-3-T N4	
NRX24-3-T N4H	w/built in heater


## Technical Data

Control	on/off, floating point
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 2.0 W / heater 24 W holding 0.2 W
Transformer sizing	4 VA (class 2 power source) / heater 19 VA
Electrical connection	screw terminal (for 26 to 14 GA wire)
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	600 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	visual pointer
Manual override	external push button
Running time	90 seconds constant independent of load
Humidity	100% RH
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing type	UL Type 4X/NEMA 4X/IP66 & IP67
Housing material	Polypropylene
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1, CSA C22.2 No. 24-93, CE according to 89/336/EEC.
Quality standard	ISO 9001

\* Cannot be used with the CCV-EXT-KIT


† Rated impulse voltage 800V, Control pollution degree 3,  
Type of action 1.

## Dimensions with 2-Way Valve

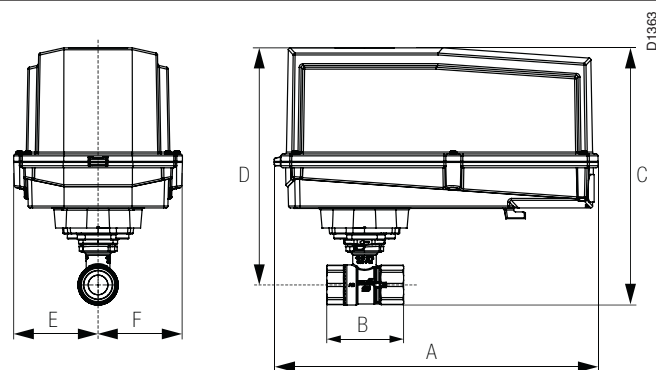

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

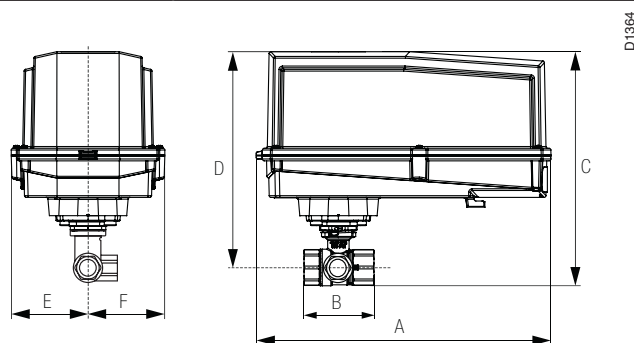

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

## Wiring Diagrams


### INSTALLATION NOTES

- CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- Actuators are provided with color coded wires.
- Wire numbers are provided for reference.
- Actuators may also be powered by 24 VDC.


### APPLICATION NOTES

- Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

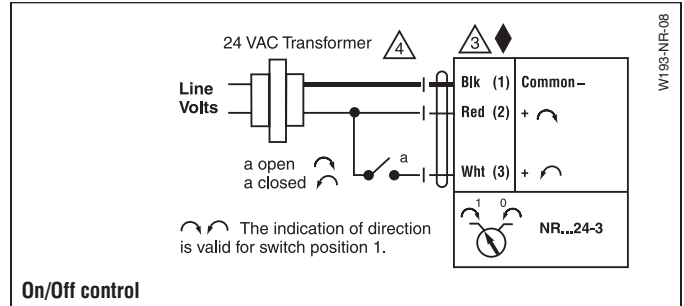


On/Off control

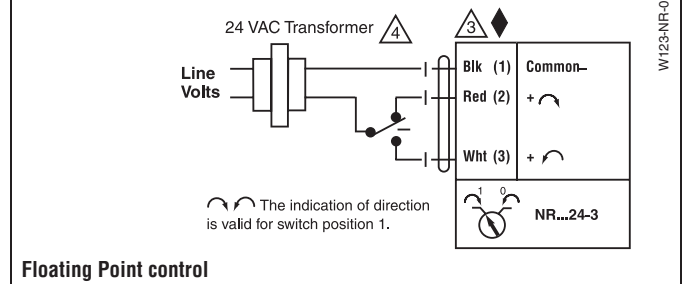

Floating Point control


with actuator types ..-3

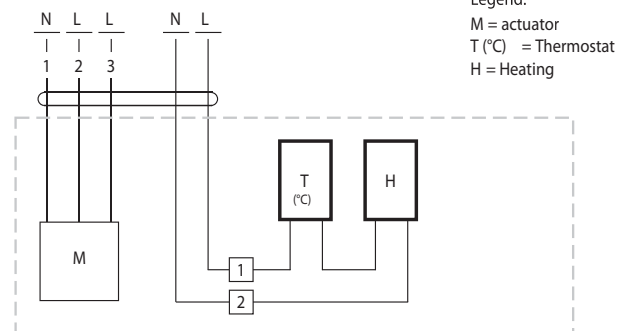

Note

- The following points must be taken into account with independent, external wiring:
- All contact between the cables or wires that are introduced and the heating element is to be avoided.
  - Where necessary, use cables with sufficient numbers of wires, e.g. so that the heating and the actuator can be supplied separately with voltage.

Heater wiring



## Models


NRB24-SR-T N4	
NRB24-SR-T N4H	w/built in heater
NRX24-SR-T N4	
NRX24-SR-T N4H	w/built in heater

Technical Data	
Control	2 to 10 VDC, 4 to 20 mA
Power supply	24 VAC $\pm$ 20% 50/60 Hz 24 VDC $\pm$ 10%
Power consumption	running 2.5 W / heater 24 W holding 0.4 W
Transformer sizing	5 VA (class 2 power source) / heater 20 VA
Electrical connection	screw terminal (for 26 to 14 GA wire)
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	100 k $\Omega$ (0.1mA), 500 $\Omega$
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	visual pointer
Manual override	external push button
Running time	90 seconds constant independent of load
Humidity	100% RH
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing type	UL Type 4X/NEMA 4X/IP66 & IP67
Housing material	Polypropelene
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1, CSA C22.2 No. 24-93, CE according to 89/336/EEC.
Quality standard	ISO 9001

†Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3


\*Cannot be used with the CCV-EXT-KIT

## Dimensions with 2-Way Valve

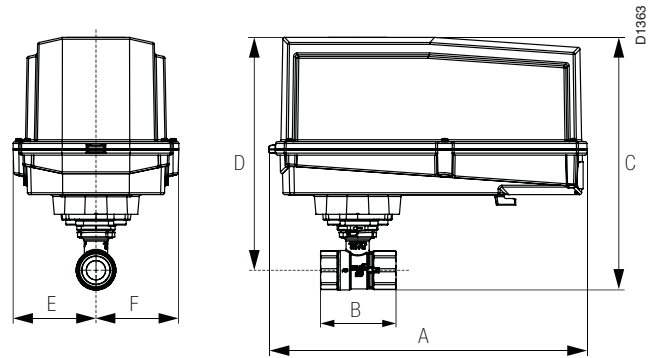

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

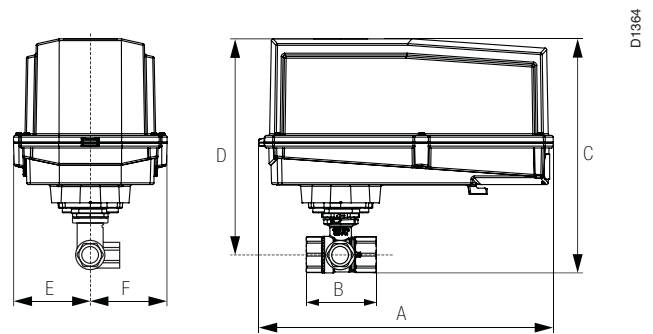


## Dimensions with 3-Way Valve




Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

**Wiring Diagrams**

**INSTALLATION NOTES**

-  **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
-  Actuators may also be powered by 24 VDC.
-  Only connect common to neg. (-) leg of control circuits.

**APPLICATION NOTES**


-  The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.

**WARNING Live Electrical Components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

**Wiring Diagrams**

with actuator types ...3

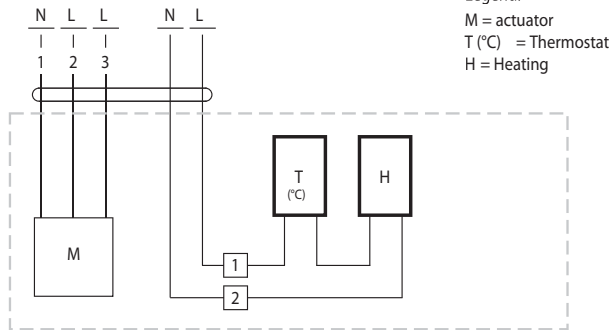



**Note**  
The following points must be taken into account with independent, external wiring:

- All contact between the cables or wires that are introduced and the heating element is to be avoided.
- Where necessary, use cables with sufficient numbers of wires, e.g. so that the heating and the actuator can be supplied separately with voltage.

**Heater wiring**

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

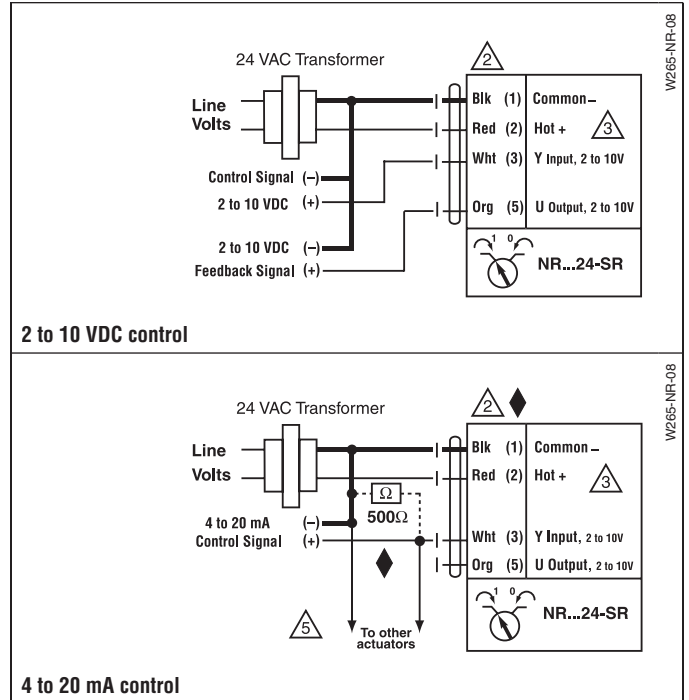

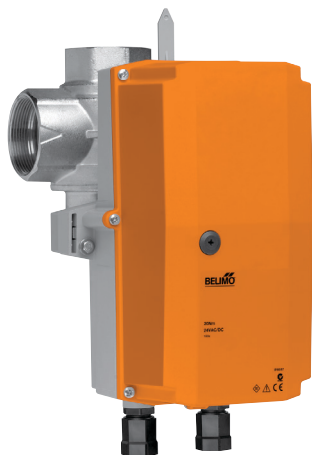

## Models


NRX24-MFT-T N4  
NRX24-MFT-T N4H w/built in heater

Technical Data	
Control	2 to 10 VDC, 4 to 20 mA (default) variable (VDC, PWM, floating point, on/off)
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 3.5 W (1.25 W) / heater 24 W holding 1.25 W
Transformer sizing	6 VA (class 2 power source) / heater 21 VA
Electrical connection	screw terminal (for 26 to 14 GA wire)
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	100 kΩ (0.1 mA), 500 Ω 1500 Ω (PWM, floating point, on/off)
Angle of rotation	95°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with  switch
Position indication	visual pointer
Manual override	external push button
Running time	150 seconds (default) constant independent of load variable (75 to 350 seconds)
Humidity	100% RH
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing type	UL Type 4X/NEMA 4X/IP66 & IP67
Housing material	Polypropelene
Agency Listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1, CSA C22.2 No. 24-93, CE according to 89/336/EEC.
Quality standard	ISO 9001

†Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3


\*Cannot be used with the CCV-EXT-KIT

## Dimensions with 2-Way Valve

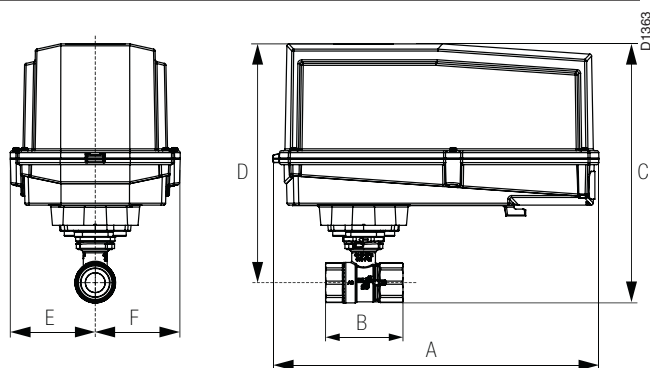

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

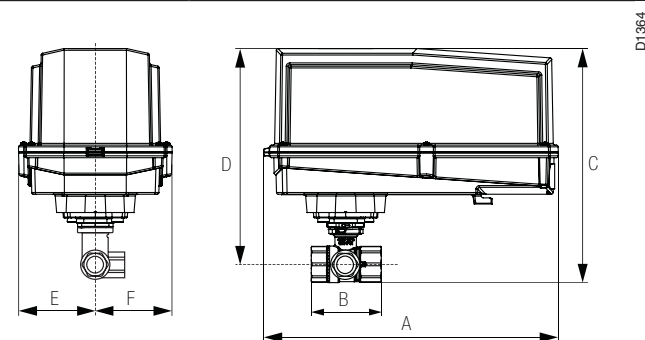

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

**Wiring Diagrams**


**INSTALLATION NOTES**

- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 Position feedback cannot be used with Triac sink controller.  
The actuator internal common reference is not compatible.
- 6 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.
- 8 Contact closures A & B also can be triacs.
- 8 A & B should both be closed for triac source and open for triac sink.
- 9 For triac sink the common connection from the actuator must be connected to the hot connection.





**APPLICATION NOTES**

- ◆ The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.


**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

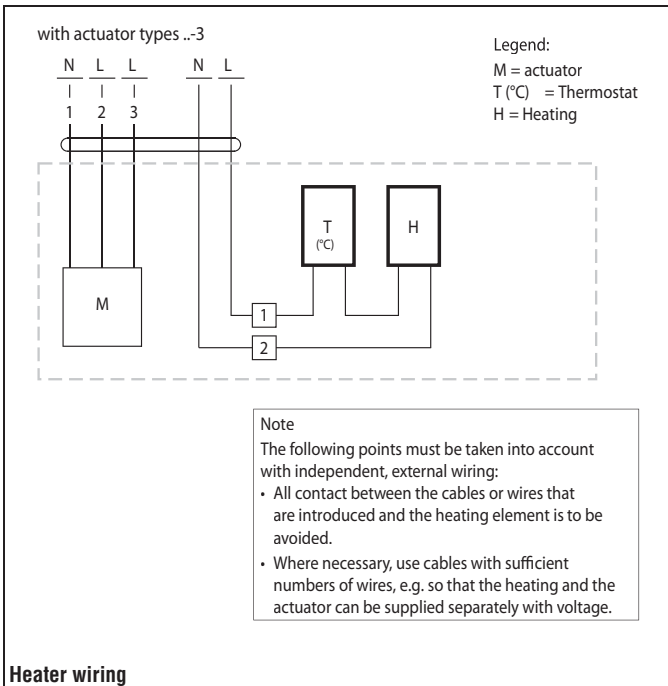

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

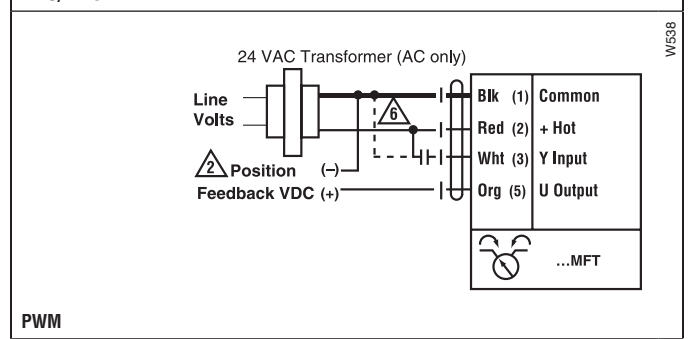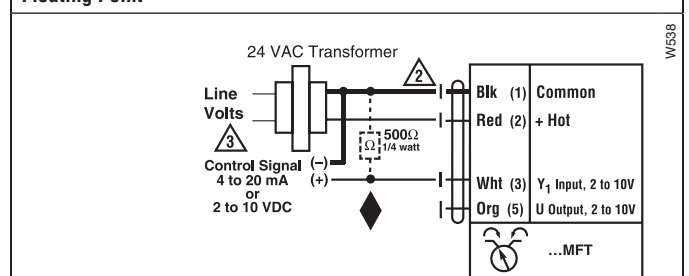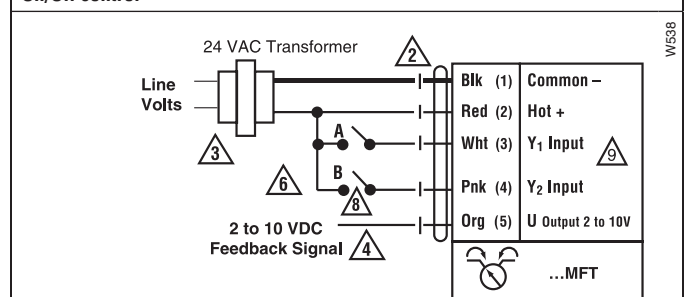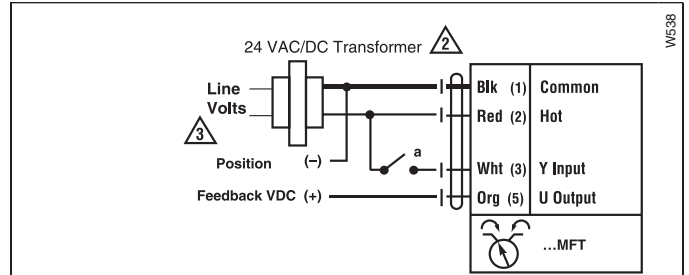

# AR...24-3 Actuators, On/Off, Floating Point

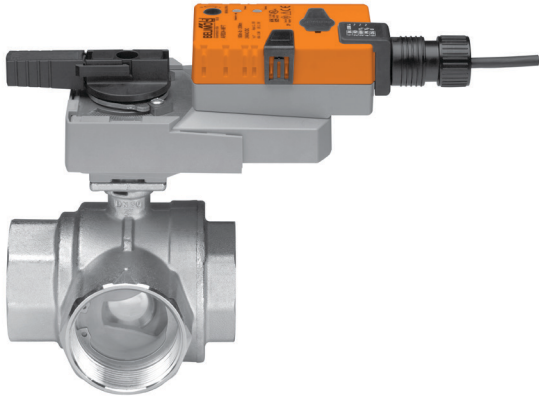

## Models

ARB24-3	
ARB24-3-S	w/built-in Aux. Switch
ARX24-3	Flexible
ARX24-3-S	Flexible w/built-in Aux. Switch
ARB24-3-5-14	
ARX24-3-5-14	


Technical Data	
Control	on/off, floating point
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 2.5 W holding 0.2 W
Transformer sizing	5.5 VA (class 2 power source)
Electrical connection	1/2" conduit connector 18 GA plenum rated cable
ARB24-3...	3 ft. [1m]
ARX24-3...	3 ft. [1m] 10 ft. [3m] 16 ft. [5m]
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	600 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with protected  switch
Position indication	handle
Manual override	external push button
Running time	ARB24-3... 90 seconds ARX24-3... 300, 150, 90 seconds, constant independent of load
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<45 dB(A)
Quality standard	ISO 9001

## AR...24-3-S

Auxiliary switch (-S models)	1 x SPDT, 3A (0.5A) @ 250 VAC, UL Listed, adjustable 0 to 90°
------------------------------	--


† Rated impulse voltage 800V, Control pollution degree 3, Type of action 1  
(1.B for -S models)

## Dimensions with 2-Way Valve

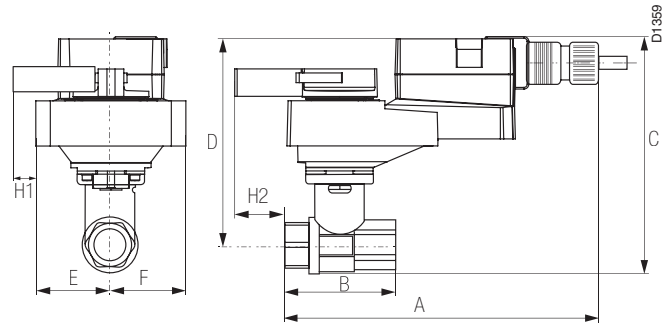

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1 1/4"	32	3.72" [94.6]	1.98" [50.4]
B238-B240	1 1/2"	40	3.88" [98.5]	1.98" [50.4]
B248-B250	2"	50	4.21" [107.0]	2.21" [56.2]
B251-B254	2"	50	4.93" [125.2]	2.68" [68.0]
B261-B265	2 1/2"	65	5.55" [140.9]	2.68" [68.0]
B277-B280	3"	80	5.82" [147.9]	2.68" [68.0]


## Dimensions with 3-Way Valve

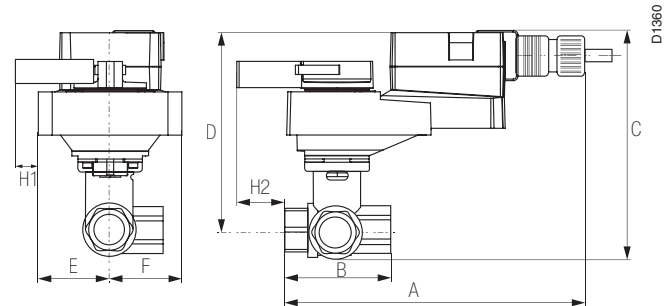

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1 1/4"	32	3.96" [100.6]	2.21" [56.2]	2.14" [54.3]
B338-B341	1 1/2"	40	4.39" [111.6]	2.45" [62.2]	2.33" [59.1]
B347-B352	2"	50	4.90" [124.5]	2.68" [68.0]	2.60" [66.0]



### Dimensions

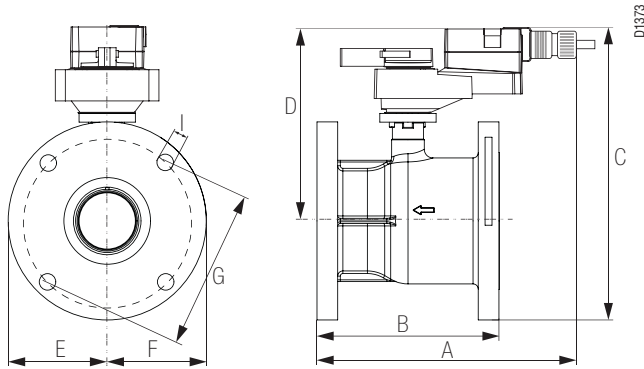

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter	Face-to-Face Length	Height
			A	B	C
B6250	2½" [65]	F05	7.50" [190.5]	5.50" [139.7]	8.10" [205.4]
B6300	3" [80]		8.00" [203.2]	6.60" [167.6]	8.40" [213.1]
B6400	4" [100]		9.00" [228.6]	8.30" [210.8]	9.30" [235.9]

### Wiring Diagrams

#### INSTALLATION NOTES

- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.  
For end position indication, interlock control, etc.,
- 3 ARB24-3-S incorporates one built-in auxiliary switches:  
1 x SPDT, 3A (0.5A) @250 VAC, UL listed, adjustable 0° to 95°.
- 4 Actuators may also be powered by 24 VDC.


#### APPLICATION NOTES

- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.


#### WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

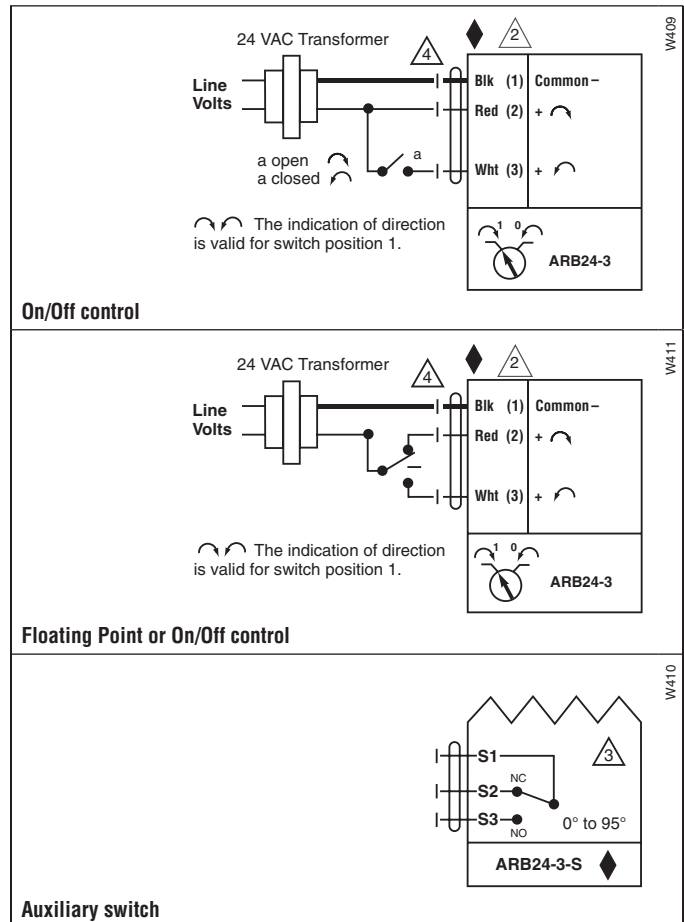

# AR...24-SR Actuators, Proportional

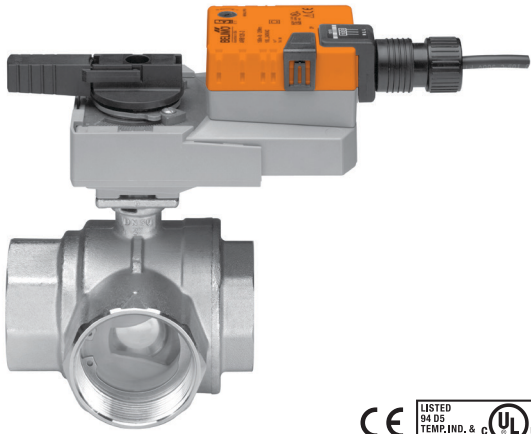


## Models

ARB24-SR  
ARX24-SR Flexible Version

Technical Data	
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 2.5 W holding 0.4 W
Transformer sizing	5 VA (class 2 power source)
Electrical connection	½" conduit connector 18 GA plenum rated cable 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0° to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20 mA
Feedback output U	1 to 10 VDC, max 0.5 mA
Input impedance	100 kΩ (0.1 mA), 500 Ω
Angle of rotation	90°, adjustable with mechanical stop
Torque	180 in-lb [20 Nm]
Direction of rotation	reversible with protected  switch
Position indication	handle
Manual override	external push button
Running time	ARB24-SR... 90 seconds ARX24-SR... 300, 150, 90 seconds, constant independent of load
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to +122°F [-30°C to +50°C]
Storage temperature	-40°F to +176°F [-40°C to +80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<45 dB(A)
Quality standard	ISO 9001


† Rated impulse voltage 800V, Control pollution degree 3, Type of action 1  
(1.B for -S models)

## Dimensions with 2-Way Valve

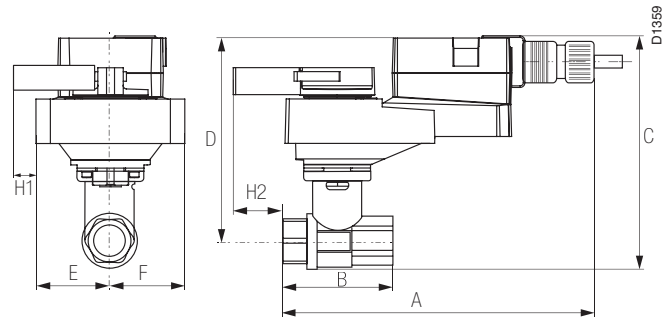

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.27" [57.7]

## Dimensions with 3-Way Valve

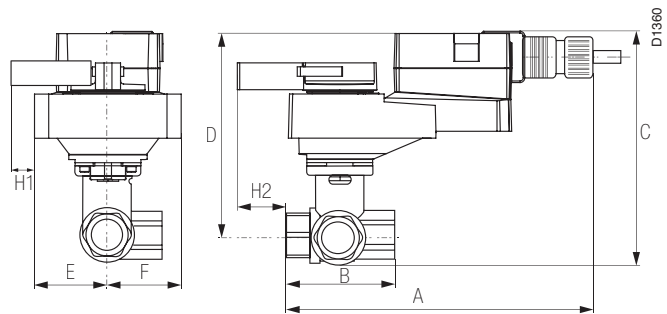

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams


#### ✂️ INSTALLATION NOTES

- ⚠️ **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- ⚠️ Actuators may also be powered by 24 VDC.
- ⚠️ Only connect common to neg. (-) leg of control circuits.


#### 📄 APPLICATION NOTES

- ◆ The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.

- ⚠️ **WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

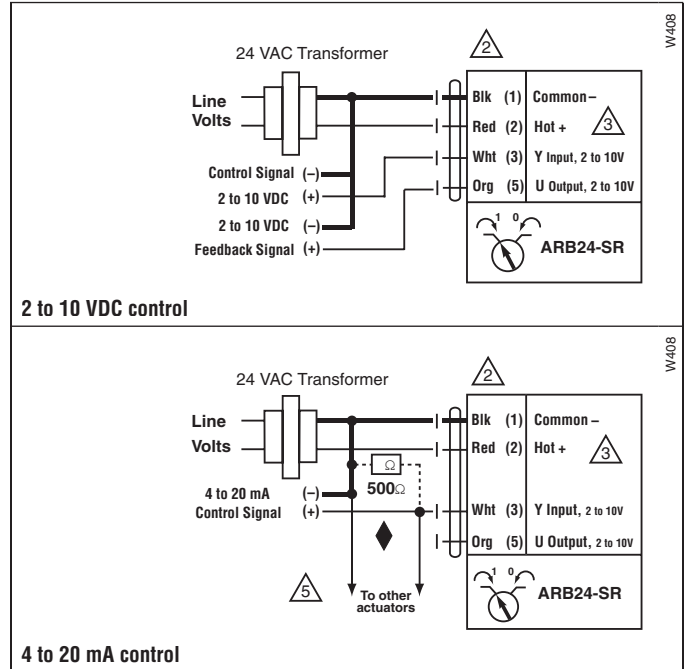

# AR...120-3 Actuators, On/Off, Floating Point

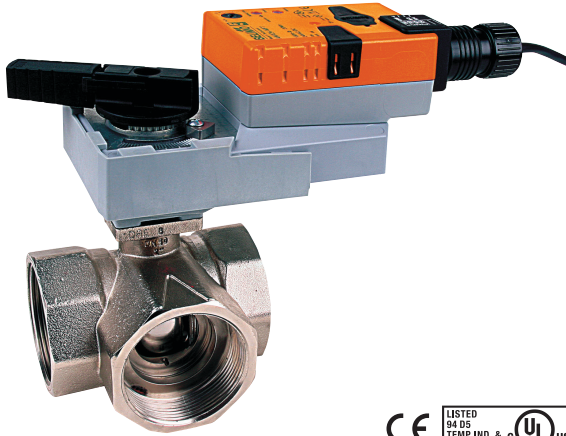


## Models

ARB120-3  
ARX120-3 Flexible Version

Technical Data	
Control	on/off, floating point
Power supply	100 to 240 VAC, 50/60 Hz (nominal) 85 to 265 VAC, 50/60 Hz (tolerance)
Power consumption	running 3 W
	holding 0.6 W
Transformer sizing	7 VA (class 2 power source)
Electrical connection	½" conduit connector
	18 GA appliance rated cable
	ARB120-3 3 ft [1m] ARX120-3 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	600 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with protected  switch
Position indication	handle
Manual override	external push button
Running time	90 seconds
	300, 150, 90 seconds,
	constant independent of load
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<45 dB(A)
Servicing	maintenance free
Quality standard	ISO 9001


† Rated impulse voltage 4kV, Control pollution degree 3, Type of action 1

## Dimensions with 2-Way Valve

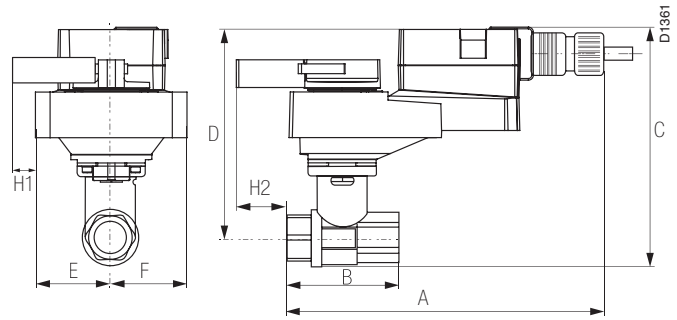


Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.27" [57.7]
B251-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B261-B265	2½"	65	5.55" [140.9]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]

## Dimensions with 3-Way Valve

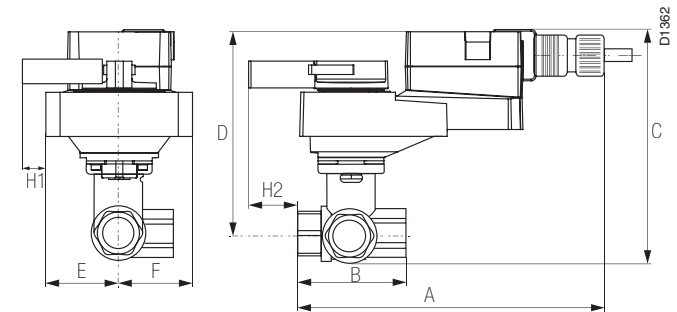

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

### Dimensions

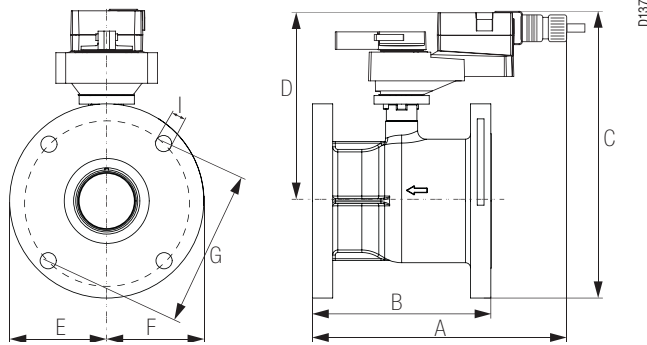

Valve Body	Nominal Pipe Size	Top Flange Design	Face-to-Face Length		Height
			A	B	
B6250	2½" [65]	F05	7.50" [190.5]	5.50" [139.7]	8.10" [205.4]
B6300	3" [80]		8.00" [203.2]	6.60" [167.6]	8.40" [213.1]
B6400	4" [100]		9.00" [228.6]	8.30" [210.8]	9.30" [235.9]

### Wiring Diagrams

#### INSTALLATION NOTES



- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel. Power consumption and input impedance must be observed.


#### APPLICATION NOTES

- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

#### WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

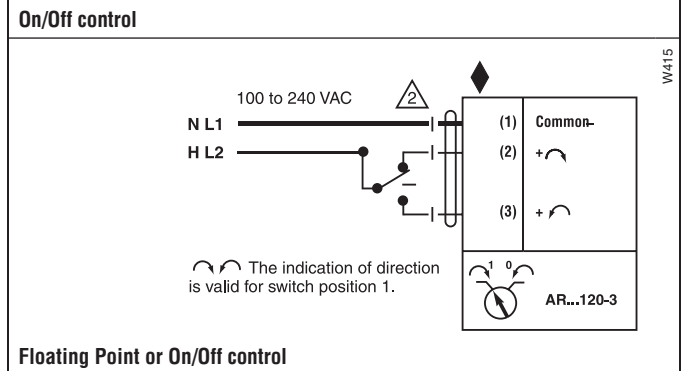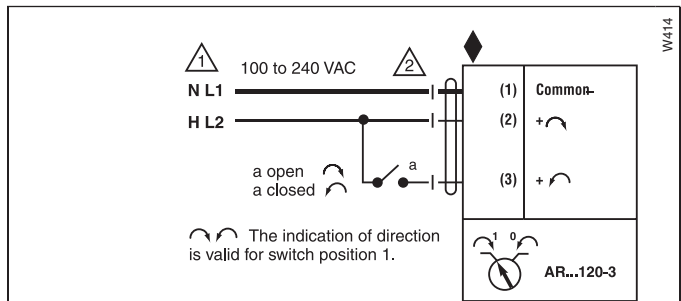

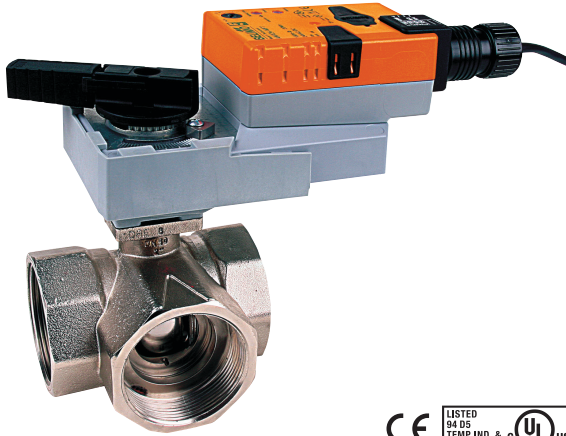


## Models

ARB120-SR  
ARX120-SR Flexible Version

Technical Data	
Control	on/off, floating point
Power supply	100 to 240 VAC, 50/60 Hz (nominal) 85 to 265 VAC, 50/60 Hz (tolerance)
Power consumption	running 3 W
	holding 0.6 W
Transformer sizing	7.5 VA (class 2 power source)
Electrical connection	½" conduit connector
	18 GA plenum rated cable
	ARB120-SR 3 ft [1m] ARX120-SR 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0° to 95° rotation
Feedback output U	1 to 10 VDC, max 0.5 mA
Input impedance	600 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with protected  switch
Position indication	handle
Manual override	external push button
Running time	ARB120-SR 90 seconds
	ARX120-SR 300, 150, 90 seconds, constant independent of load
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<45 dB(A)
Servicing	maintenance free
Quality standard	ISO 9001


† Rated impulse voltage 4kV, Control pollution degree 3, Type of action 1

### Dimensions with 2-Way Valve

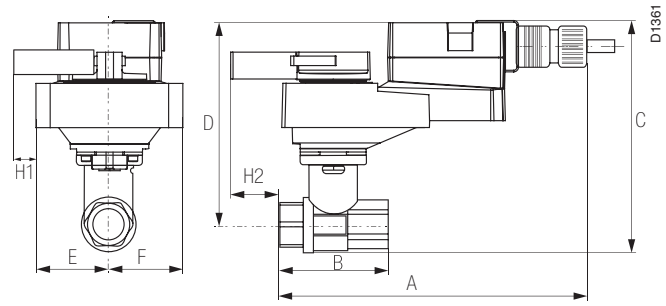

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.27" [57.7]

### Dimensions with 3-Way Valve

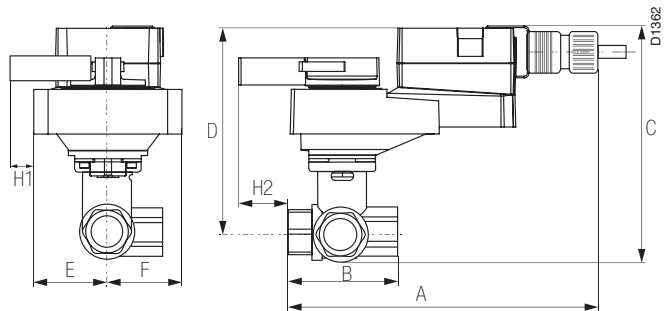

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams

#### ✂️ INSTALLATION NOTES



#### **CAUTION** Equipment damage!

Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.



Only connect common to neg. (-) leg of control circuits.



A 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC.



ARB(X) can be supplied with both 120 VAC and 230 VAC.



All 120 VAC and 230 VAC actuators use appliance rated cables.



#### APPLICATION NOTES





Meets cULus or UL and CSA requirements without the need of an electrical ground connection.



#### **WARNING** Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

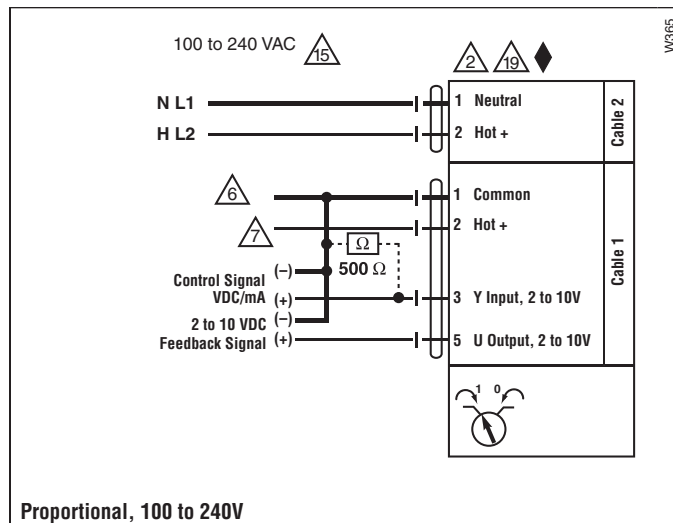

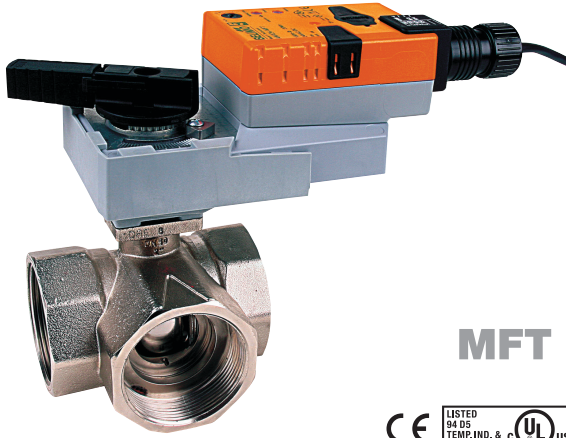

**MFT**




## Models

ARX24-MFT  
ARX24-MFT-5-14

Technical Data	
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 4 W holding 1.25 W
Transformer sizing	6 VA (class 2 power source)
Electrical connection	½" conduit connector 18 GA plenum rated cable 3 ft. [1m], 10 ft. [3m], 16 ft. [5m]
ARX24-MFT	
Overload protection	electronic throughout 0° to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20 mA (default) variable (VDC, PWM, floating point, on/off)
Feedback output U	2 to 10 VDC, 0.5 mA max VDC variable
Input impedance	100 kΩ (0.1 mA), 500 Ω 1500 Ω (PWM, floating point, on/off)
Angle of rotation	95° electronically variable
Direction of rotation	reversible with protected  switch
Position indication	handle
Manual override	external push button
Running time	ARB24-MFT 150 seconds ARX24-MFT variable (90 to 350 seconds)
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<45 dB(A)
Quality standard	ISO 9001


† Rated impulse voltage 4kV, Control pollution degree 3, Type of action 1

## Dimensions with 2-Way Valve

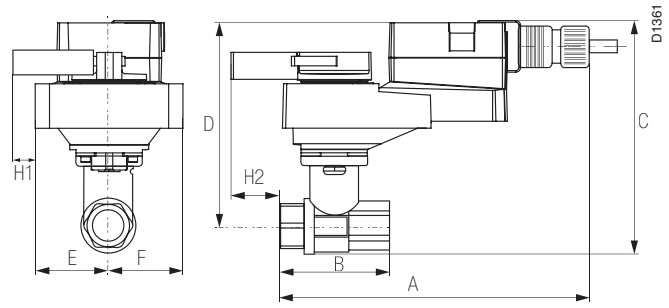

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	1.98" [50.4]
B238-B240	1½"	40	3.88" [98.5]	1.98" [50.4]
B248-B250	2"	50	4.21" [107.0]	2.21" [56.2]
B251-B254	2"	50	4.93" [125.2]	2.68" [68.0]
B261-B265	2½"	65	5.55" [140.9]	2.68" [68.0]
B277-B280	3"	80	5.82" [147.9]	2.68" [68.0]


## Dimensions with 3-Way Valve

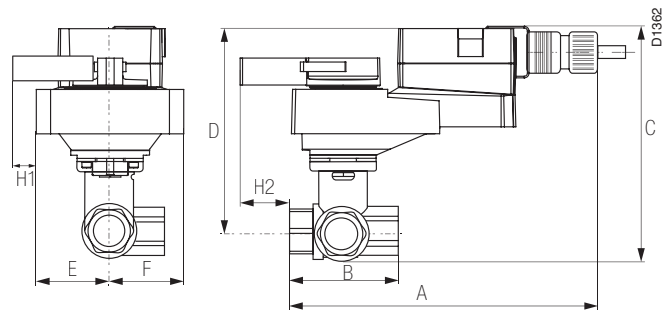

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.21" [56.2]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.45" [62.2]	2.33" [59.1]
B347-B352	2"	50	4.90" [124.5]	2.68" [68.0]	2.60" [66.0]



### Dimensions

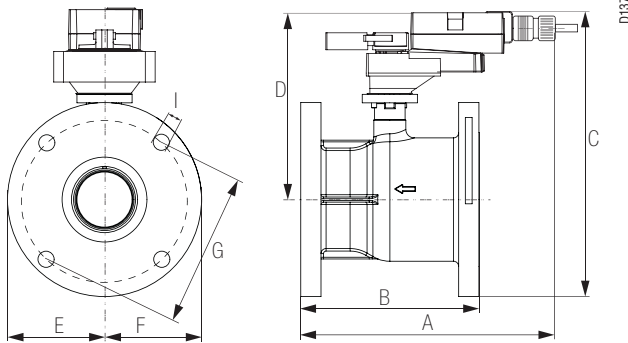

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter	Face-to-Face Length	Height
			A	B	C
B6250	2½" [65]	F05	7.50" [190.5]	5.50" [139.7]	8.10" [205.4]
B6300	3" [80]		8.00" [203.2]	6.60" [167.6]	8.40" [213.1]
B6400	4" [100]		9.00" [228.6]	8.30" [210.8]	9.30" [235.9]

### Wiring Diagrams

#### INSTALLATION NOTES


- 2** **CAUTION Equipment damage!**  
Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 3** Actuators may also be powered by 24 VDC.
- 4** Position feedback cannot be used with Triac sink controller. The actuator internal common reference is not compatible.
- 6** Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.
- 8** Contact closures A & B also can be triacs. A & B should both be closed for triac source and open for triac sink.
- 9** For triac sink the common connection from the actuator must be connected to the hot connection.

#### APPLICATION NOTES


- ◆ The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.

#### WARNING Live Electrical Components!


During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

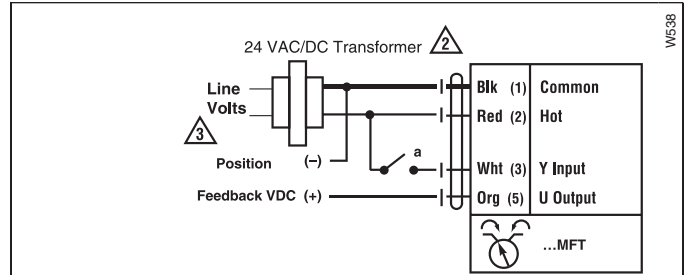


On/Off control

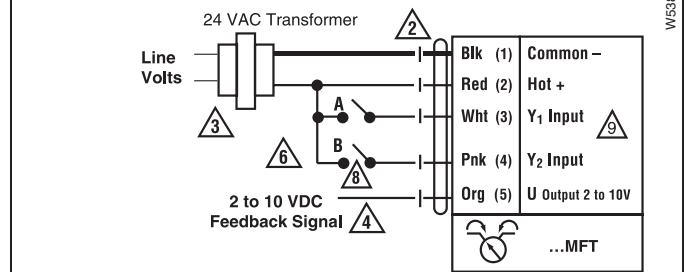

Floating Point

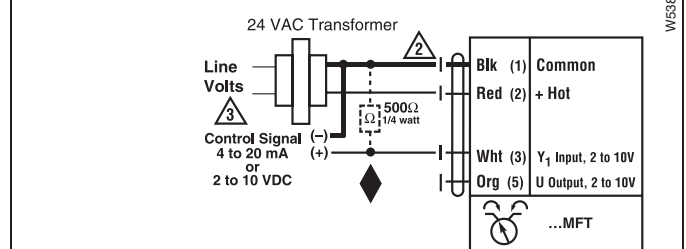


VDC/4-20 mA

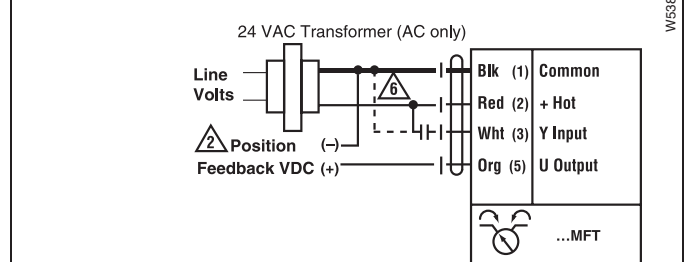

PWM

# ARX24-PC Actuators, Phasecut

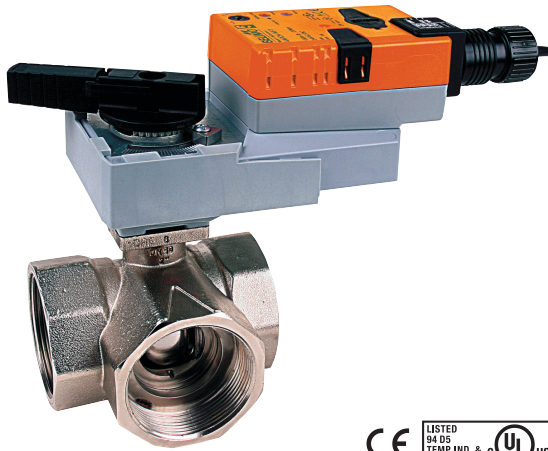


## Models

ARX24-PC

Technical Data	
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 4 W holding 1.25 W
Transformer sizing	5.5 VA (Class 2 power source)
Electrical connection	½" conduit connector 18 GA plenum rated cable 3 ft. [1m], 10 ft. [3m], 16 ft. [5m]
Overload protection	electronic throughout 0 to 95° rotation
Operating range Y	0 to 20V phasecut
Feedback output U	2 to 10 VDC, 0.5mA max VDC variable
Input impedance	8 kΩ (50 mW)
Angle of rotation	90°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with ↺/↻ switch
Position indication	handle
Manual override	external push button
Running time	150 seconds (default)
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<45 dB(A)
Quality standard	ISO 9001


†Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3.

## Dimensions with 2-Way Valve

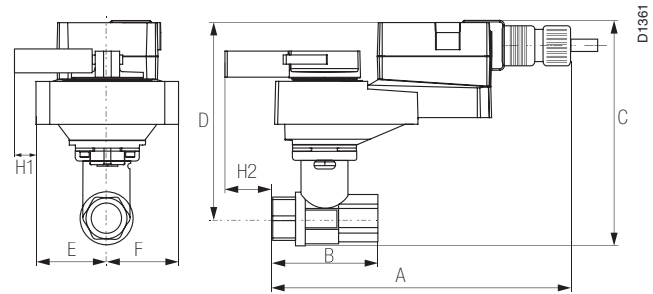

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.27" [57.7]
B251-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B261-B265	2½"	65	5.55" [140.9]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]

## Dimensions with 3-Way Valve

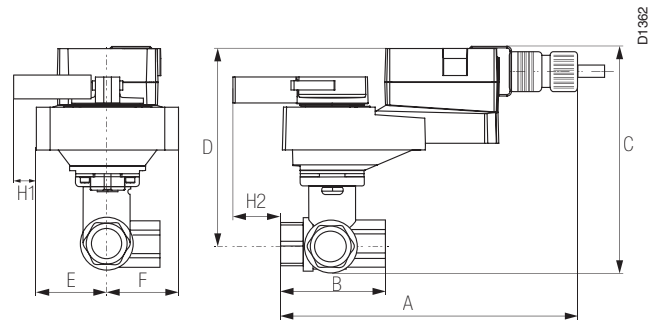

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams


#### ✂ **INSTALLATION NOTES**

1 Provide overload protection and disconnect as required.


2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.

3 Actuators may also be powered by 24 VDC.

**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

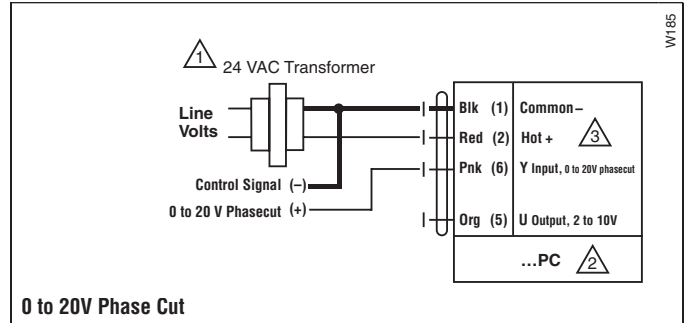

# ARX24-MFT95 Actuators, 0 to 135 Ω

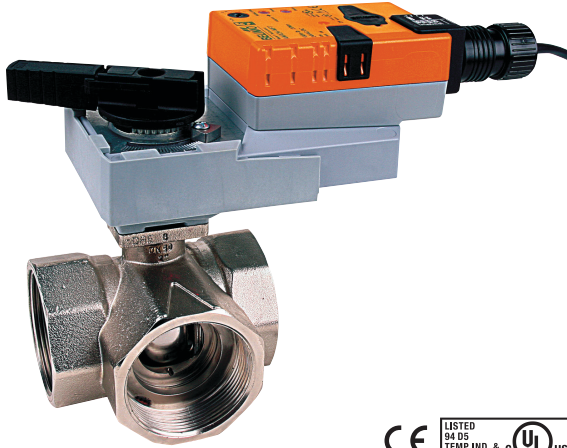


## Models

ARX24-MFT95

Technical Data	
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 4 W holding 1.25 W
Transformer sizing	6 VA (Class 2 power source)
Electrical connection	½" conduit connector 18 GA plenum rated cable 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Operating range WRB	0 to 135 Ω Honeywell Electronic Series 90, 0 to 135 Ω input
Feedback output U	2 to 10 VDC, 0.5mA max
Input impedance	100 kΩ (0.1 mW)
Angle of rotation	90°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with ↻/↻ switch
Position indication	handle
Manual override	external push button
Running time	150 seconds (default) variable (90 to 350 seconds)
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<45 dB(A)
Quality standard	ISO 9001


†Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3.

## Dimensions with 2-Way Valve

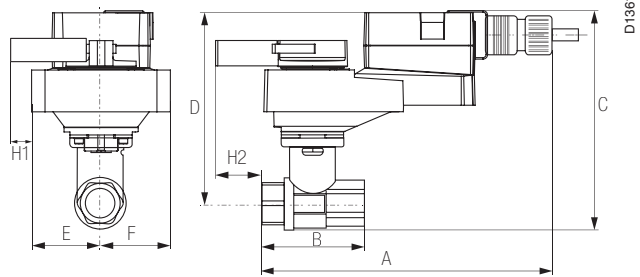

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.27" [57.7]
B251-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B261-B265	2½"	65	5.55" [140.9]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]

## Dimensions with 3-Way Valve

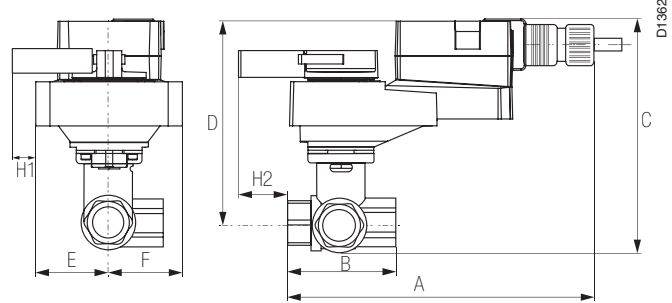

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.


### Wiring Diagrams

#### ✂️ INSTALLATION NOTES


- 1 Provide overload protection and disconnect as required.
  - 2 **CAUTION Equipment damage!**  
Actuators and controller must have separate transformers.
  - 3 Consult controller instruction data for more detailed installation information.
  - 4 Resistor value depends on the type of controller and the number of actuators. No resistor is used for one actuator. Honeywell resistor kits may also be used.
  - 5 To reverse control rotation, use the reversing switch.
- ⚠️ WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Switch A	Switch B	Damper Position
		Damper Open
		Damper Closed


The direction of rotation switch is set so that the fail safe position and the position of the damper is closed with no signal at wire R.

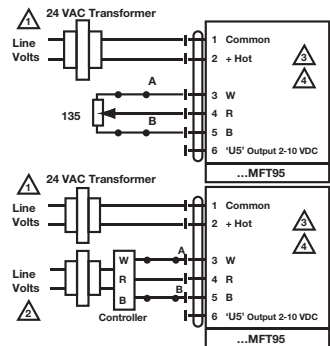


#### Override

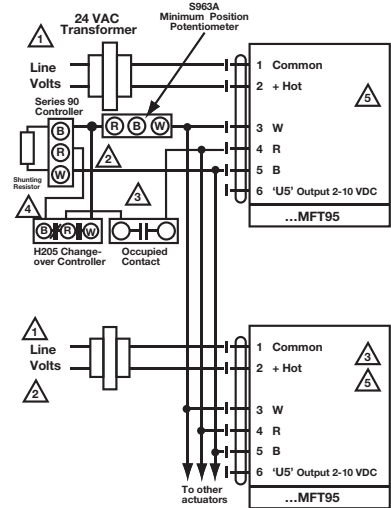

Wiring multiple actuators to a Series 90 controller using a minimum position potentiometer.

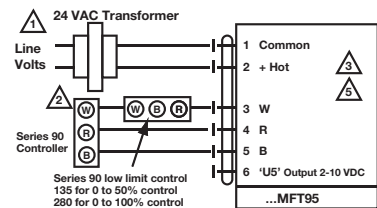

#### Low Limit Control

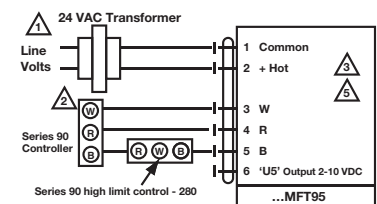

#### High Limit Control



## Models

ARB24-3-T N4	
ARB24-3-T N4H	w/built in heater
ARX24-3-T N4	
ARX24-3-T N4H	w/built in heater


## Technical Data

Control	on/off, floating point
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 2.5 W / heater 23 W holding 0.5 W
Transformer sizing	5.5 VA (class 2 power source) / heater 20.5 VA
Electrical connection	screw terminal (for 26 to 14 GA wire)
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	600 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	visual pointer
Manual override	external push button
Running time	90 seconds constant independent of load
Humidity	100% RH
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing type	UL Type 4X/NEMA 4X/IP66 & IP67
Housing material	Polypropelene
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1, CSA C22.2 No. 24-93, CE according to 89/336/EEC.
Quality standard	ISO 9001

†Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3


\*Cannot be used with the CCV-EXT-KIT

## Dimensions with 2-Way Valve

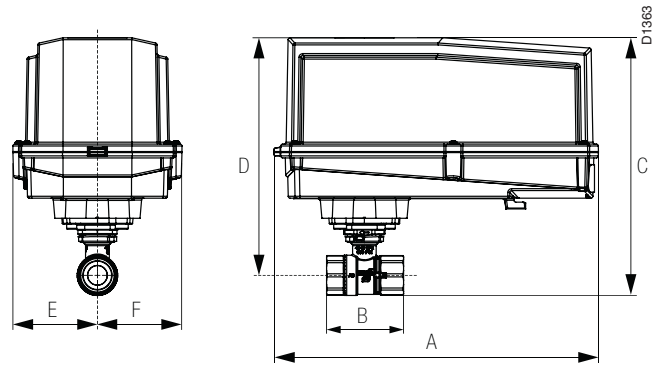

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.27" [57.7]
B251-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B261-B265	2½"	65	5.55" [140.9]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]

## Dimensions with 3-Way Valve

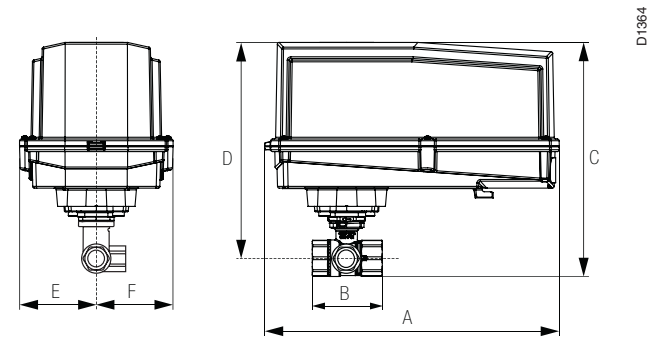

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

**Wiring Diagrams**

**INSTALLATION NOTES**



**CAUTION Equipment damage!**

Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.  
For end position indication, interlock control, etc.,



ARB24-3-S incorporates one built-in auxiliary switches:  
1 x SPDT, 3A (0.5A) @250 VAC, UL listed, adjustable 0° to 95°.



Actuators may also be powered by 24 VDC.



**APPLICATION NOTES**




Meets cULus or UL and CSA requirements without the need of an electrical ground connection.




**WARNING Live Electrical Components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.


P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

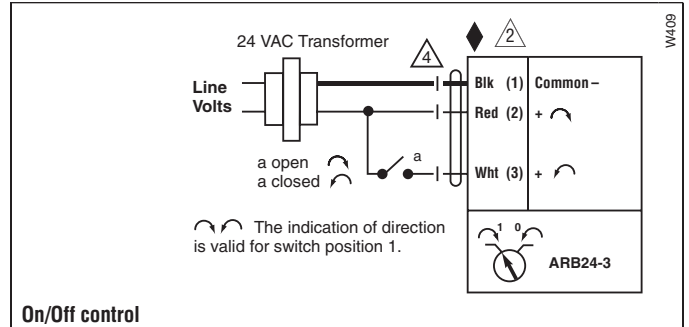

**On/Off control**

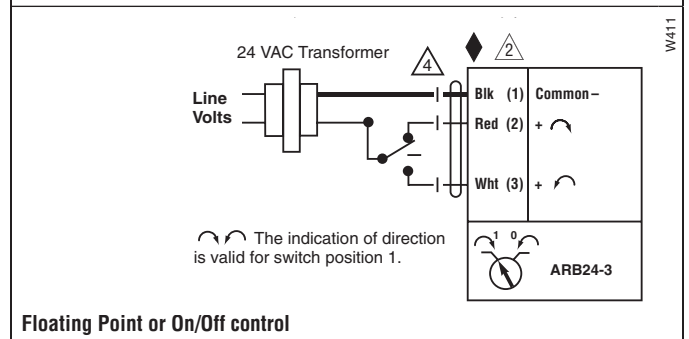

**Floating Point or On/Off control**

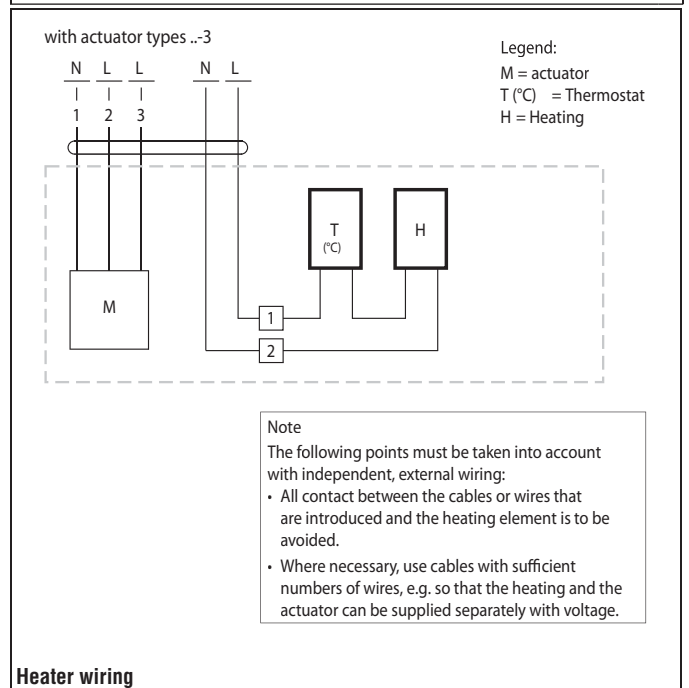

**Heater wiring**



## Models

- ARB24-SR-T N4
- ARB24-SR-T N4H w/built in heater
- ARX24-SR-T N4
- ARX24-SR-T N4H w/built in heater


## Technical Data

Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 2.5 W / heater 23 W holding 0.4 W
Transformer sizing	5 VA (class 2 power source) / heater 20 VA
Electrical connection	screw terminal (for 26 tp 14 GA wire)
Overload protection	electronic throughout 0° to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20 mA
Input impedance	600 Ω
Angle of rotation	90°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	visual pointer
Manual override	external push button
Running time	90 seconds constant independent of load
Humidity	100% RH
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing type	UL Type 4X/NEMA 4X/IP66 & IP67
Housing material	Polypropelene
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1, CSA C22.2 No. 24-93, CE according to 89/336/EEC.
Quality standard	ISO 9001

†Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3


\*Cannot be used with the CCV-EXT-KIT

## Dimensions with 2-Way Valve

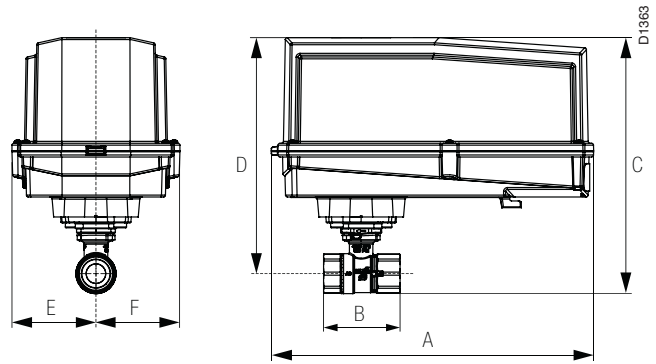

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.27" [57.7]
B251-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B261-B265	2½"	65	5.55" [140.9]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]

## Dimensions with 3-Way Valve

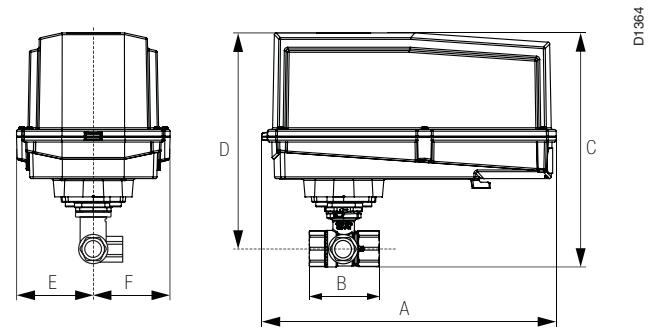

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]



**Wiring Diagrams**

**✂ INSTALLATION NOTES**

- ⚠ **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- ⚠ **3** Actuators may also be powered by 24 VDC.
- ⚠ **5** Only connect common to neg. (-) leg of control circuits.


**📄 APPLICATION NOTES**

- ◆ The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.

**⚠ WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

**Wiring Diagrams**

with actuator types ...3

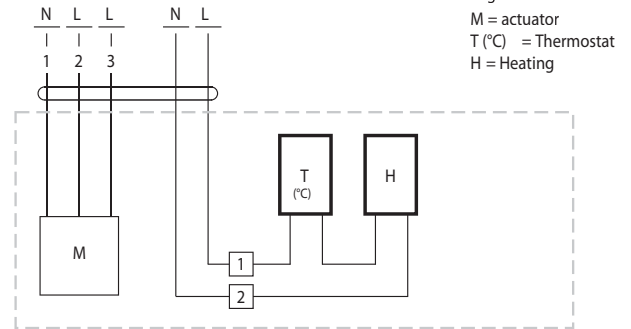


Legend:  
M = actuator  
T (°C) = Thermostat  
H = Heating


**Note**  
The following points must be taken into account with independent, external wiring:

- All contact between the cables or wires that are introduced and the heating element is to be avoided.
- Where necessary, use cables with sufficient numbers of wires, e.g. so that the heating and the actuator can be supplied separately with voltage.

**Heater wiring**

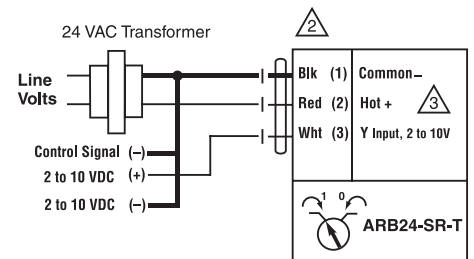

**2 to 10 VDC control**

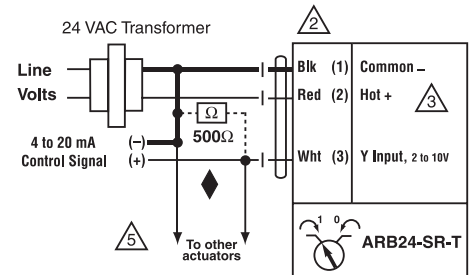


**4 to 20 mA control**

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

W408-SR-T

W408-SR-T



## Models


ARX24-MFT-T N4  
ARX24-MFT-T N4H w/built in heater

Technical Data	
Control	2 to 10 VDC, 4 to 20 mA (default) variable (VDC, PWM, floating point, on/off)
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 3.5 W / heater 24 W holding 1.25 W
Transformer sizing	6 VA (class 2 power source) / heater 21 VA
Electrical connection	screw terminal (for 26 tp 14 GA wire)
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	100 kΩ for 2 to 10 VDC (0.1 mA) 500 Ω for 4 to 20 mA 1500 Ω for PWM, floating point and on/off control
Angle of rotation	95°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with  switch
Position indication	visual pointer
Manual override	external push button
Running time	150 seconds (default) constant independent of load variable (75 to 350 seconds)
Humidity	100% RH
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing type	UL Type 4X/NEMA 4X/IP66 & IP67
Housing material	Polypropelene
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1, CSA C22.2 No. 24-93, CE according to 89/336/EEC.
Quality standard	ISO 9001

† Rated impulse voltage 4kV, Control pollution degree 3, Type of action 1


\*Cannot be used with the CCV-EXT-KIT

## Dimensions with 2-Way Valve

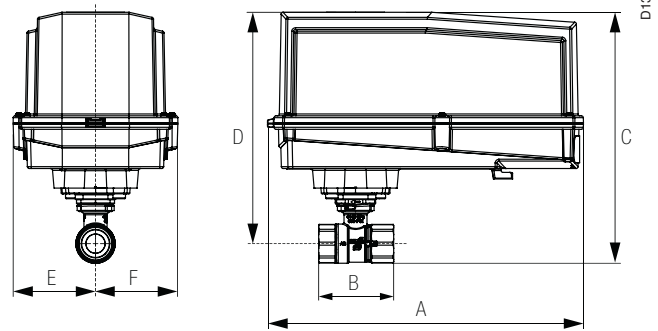

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.27" [57.7]
B251-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B261-B265	2½"	65	5.55" [140.9]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]

## Dimensions with 3-Way Valve

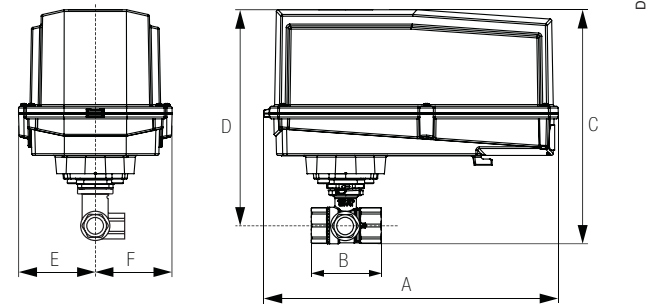

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

**Wiring Diagrams**






**INSTALLATION NOTES**

- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 Position feedback cannot be used with Triac sink controller.  
The actuator internal common reference is not compatible.
- 6 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.
- 8 Contact closures A & B also can be triacs.
- 8 A & B should both be closed for triac source and open for triac sink.
- 9 For triac sink the common connection from the actuator must be connected to the hot connection.

**APPLICATION NOTES**


- The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.

**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

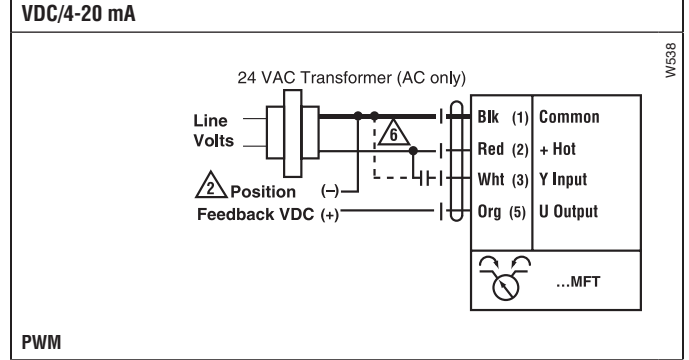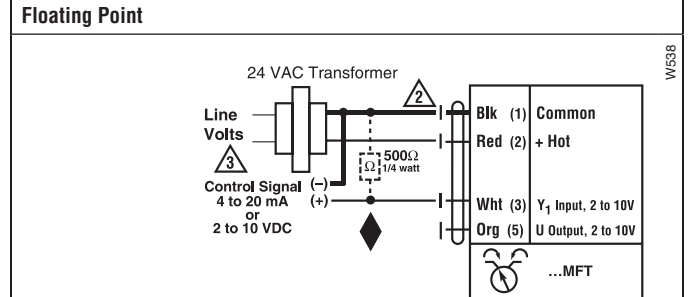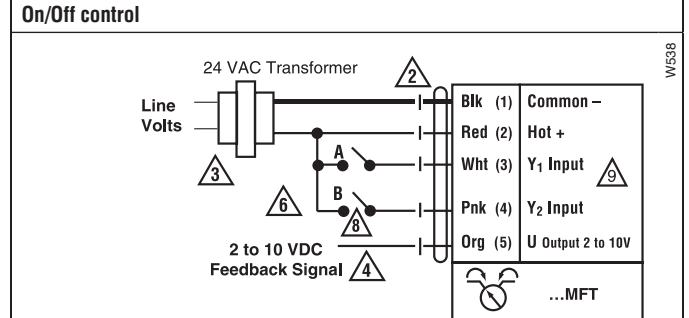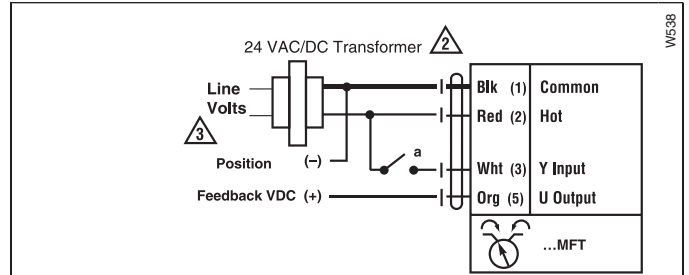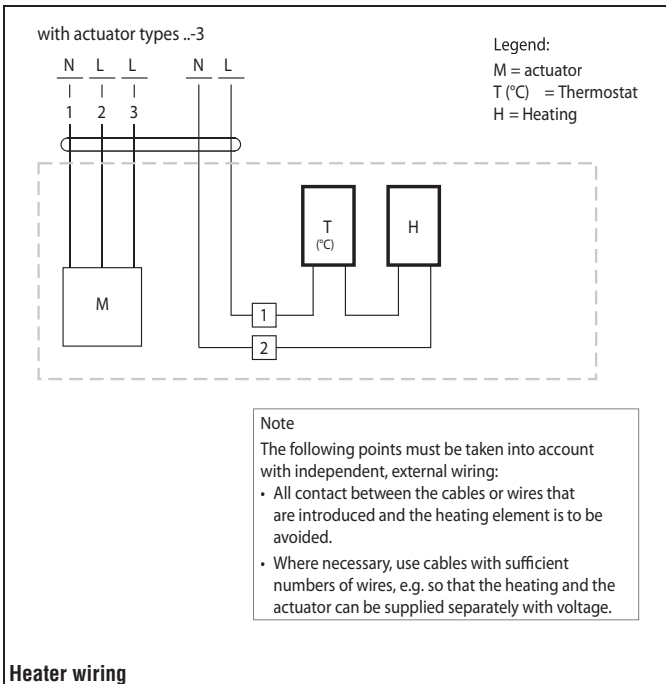

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

# ARQX24-1 Quick Running Actuators, On/Off

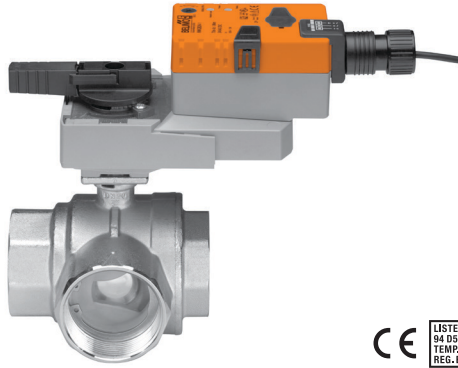


## Models

ARQX24-1 Flexible Version

Technical Data	
Control	on/off
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 15 W holding 1.5 W
Transformer sizing	26 VA (Class 2 power source)
Electrical connection	½" conduit connector, 18 GA plenum rated cable 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Input impedance	100 Ω
Angle of rotation	max 95°, adjustable with mechanical stop
Direction of rotation	reversible with ↻/↻ switch
Position indication	reflective visual indicator (snap-on)
Manual override	external push button
Running time	constant of independent load 10 or 15 seconds
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<52 dB(A)
Quality standard	ISO 9001


Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3.

## Dimensions with 2-Way Valve

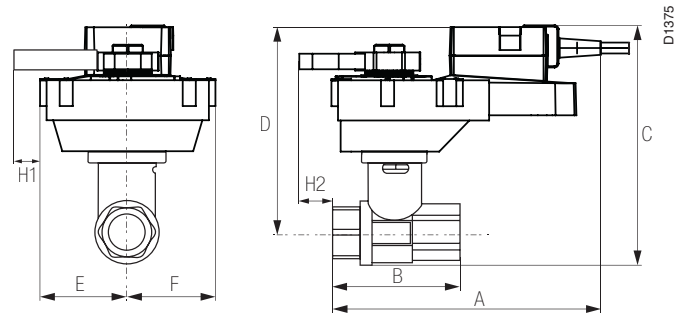

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B248-B280	2"	50	4.21" [107]	2.27" [57.7]

## Dimensions with 3-Way Valve

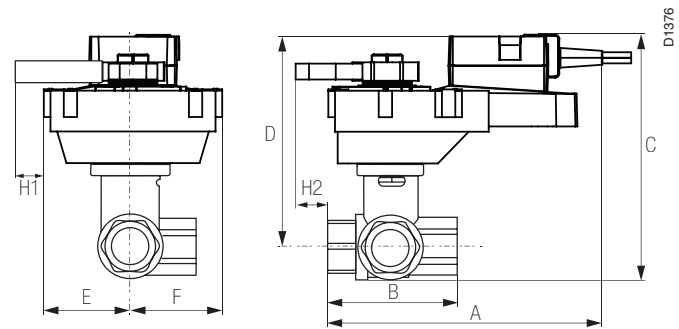



Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B330-B332	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B340	1½"	40	4.39" [111.6]	2.51" [63.7]	2.90" [61.1]
B348-B352	2"	50	4.95" [124.5]	2.73" [69.5]	2.74" [69.7]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams

#### **INSTALLATION NOTES**


-  Provide overload protection and disconnect as required.
-  Actuators may also be powered by 24 VDC.


#### **APPLICATION NOTES**

-  Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

#### **WARNING Live Electrical Components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

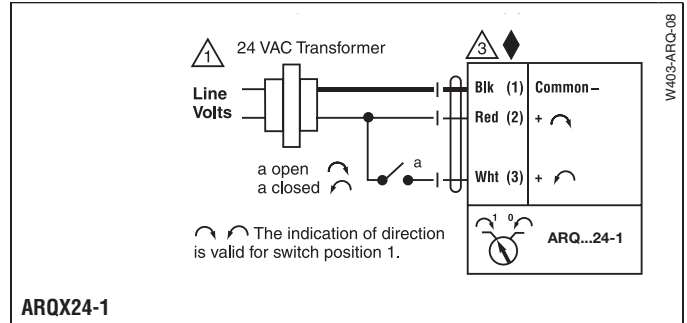

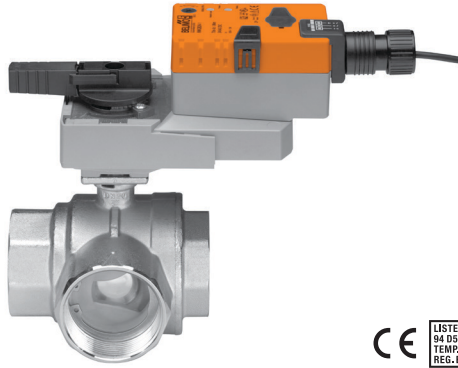


## Models

ARQX24-MFT Flexible Version

Technical Data	
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 15 W holding 1.5 W
Transformer sizing	26 VA (Class 2 power source)
Electrical connection	½" conduit connector, 18 GA plenum rated cable 3 ft [1m], 10 ft [3m], 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20 mA (default) variable (VDC, on/off)
Feedback output U	2 to 10 VDC, 0.5mA max VDC variable
Input impedance	100 kΩ (0.1 mA), 500 Ω, 1500 Ω (on/off)
Angle of rotation	max 95°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with ↻/↻ switch
Position indication	reflective visual indicator (snap-on)
Manual override	external push button
Running time	constant of independent load 10 or 15 seconds
Humidity	5 to 95% RH non-condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54
Housing material	UL94-5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level	<52 dB(A)
Quality standard	ISO 9001

Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3.


## Dimensions with 2-Way Valve

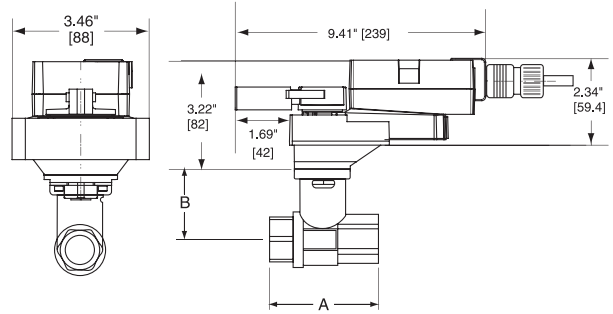

D149-2A

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1¼"	32	3.72" [94.6]	2.04" [51.9]
B238-B240	1½"	40	3.88" [98.5]	2.04" [51.9]
B248-B250	2"	50	4.21" [107.0]	2.21" [56.2]
B251-B254	2"	50	4.93" [125.2]	2.68" [68.0]
B261-B265	2½"	65	5.55" [140.9]	2.68" [68.0]
B277-B280	3"	80	5.82" [147.9]	2.68" [68.0]

## Dimensions with 3-Way Valve

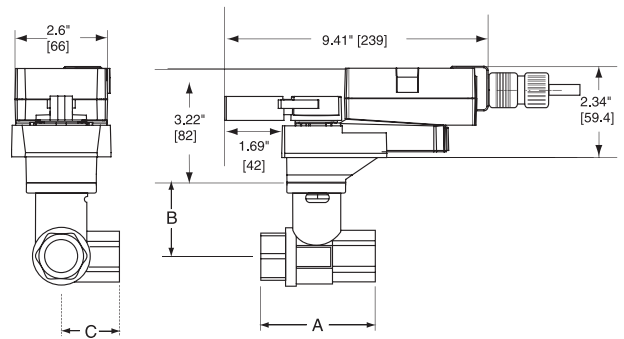

D149A

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B330-B332	1¼"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B340	1½"	40	4.39" [111.6]	2.51" [63.7]	2.90" [61.1]
B348-B352	2"	50	4.95" [124.5]	2.73" [69.5]	2.74" [69.7]

## Wiring Diagrams

### ✂️ INSTALLATION NOTES


- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 5 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.

### 📄 APPLICATION NOTES

- ◆ The ZG-R01 500 Ω resistor may be used.

### ⚠️ WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

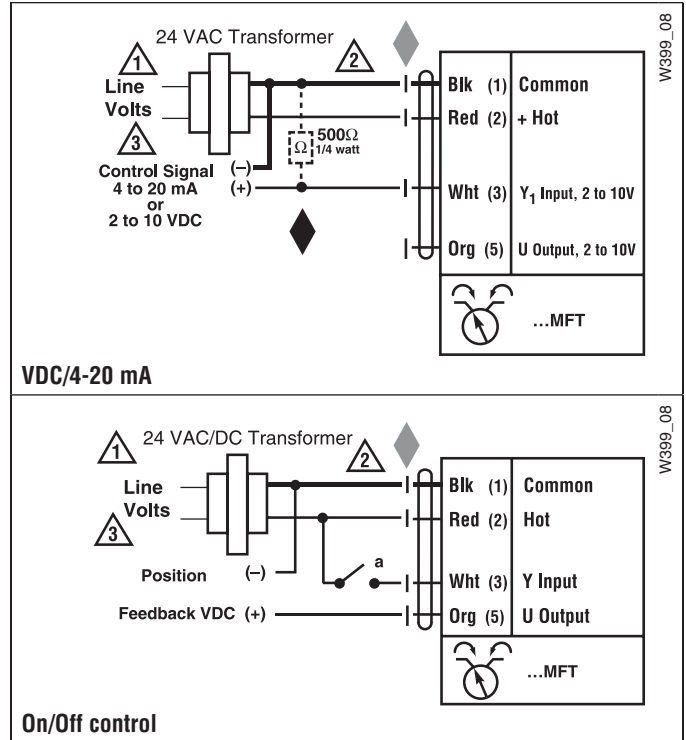

# GRB24-3, GRX24-3 Actuators, On/Off, Floating Point




## Models

GRB24-3-5-14  
GRX24-3-5-14

Technical Data	
Control	on/off, floating point
Power supply	24 VAC ± 20% 50/60 Hz
Power consumption	running 4 W holding 2 W
Transformer sizing	6 VA (Class 2 power source)
Electrical connection	3 ft, 18 GA plenum rated cable ½" conduit connector GRX 3 ft. [1m], 10 ft. [3m], 16 ft. [5m]
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	600 Ω
Angle of rotation	max. 95°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	visual indicator
Running time	150 seconds, constant independent of load
Manual override	external push button
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Housing	NEMA 2/IP54, Enclosure Type 2
Agency listings †	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EEC and 2006/95/EC.
Noise level	<45 dB(A)
Quality standard	ISO 9001

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

## Dimensions

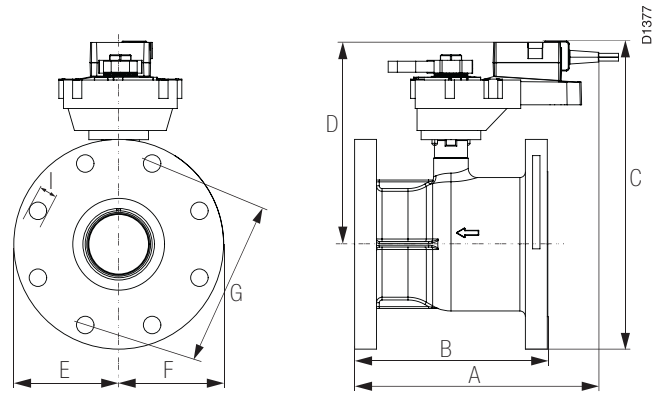



Valve Body	Nominal Pipe Size	Top Flange Design	Face-to-Face Length		Height
			A	B	C
B6400	4" [100]	F05	9.00" [228.6]	8.30" [210.8]	9.30" [235.9]
B6500	5" [125]		10.00" [254]	10.30" [261.6]	10.50" [266.4]
B6600	6" [150]		11.00" [279.4]	12.50" [317.5]	11.70" [296.9]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.




### Wiring Diagrams

#### **INSTALLATION NOTES**


-  Provide overload protection and disconnect as required.
-  Actuators may also be powered by 24 VDC.

#### **APPLICATION NOTES**


-  Meets cULus requirements without the need of an electrical ground connection.

#### **WARNING Live Electrical Components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

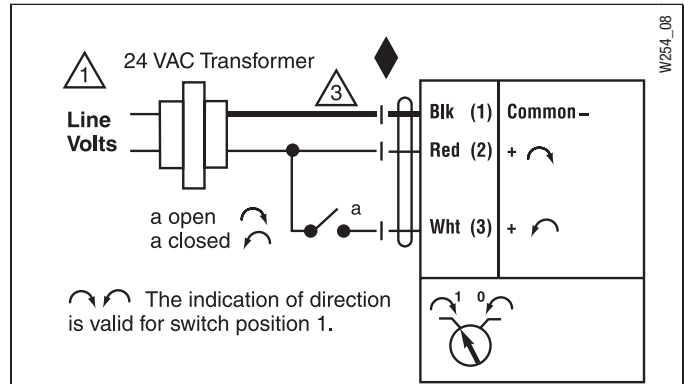

**On/Off control**

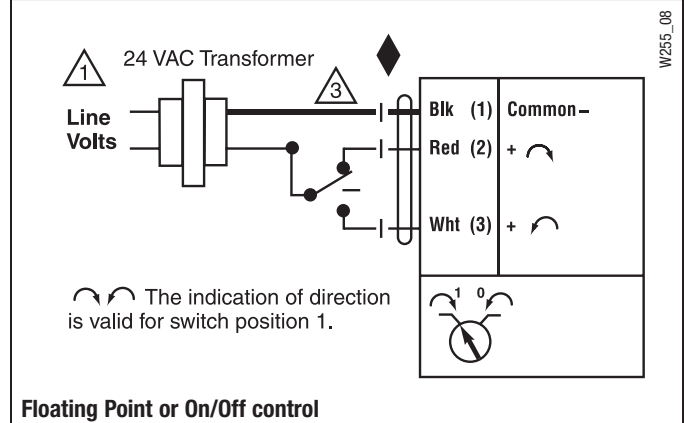

**Floating Point or On/Off control**



## Models


GRB120-3  
GRX120-3

### Technical Data

Power Supply	100 to 240 VAC, 50/60 Hz (nominal) 85 to 265 VAC, 50/60 Hz (tolerance)
Power consumption	running 4 W holding 2 W
Transformer sizing	7 VA (Class 2 power source)
Electrical connection	18 GA appliance rated cable ½" conduit connector 3 ft. [1m], 10 ft. [3m], 16 ft. [5m]
Overload protection	electronic throughout 0° to 95° rotation
Control	on/off, floating point
Input impedance	600 Ω
Angle of rotation	max. 95°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	external push button
Running time	150 seconds, constant independent of load
Humidity	5 to 95% RH non condensing (EN 60730-1)
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Housing	NEMA 2/IP54, Enclosure Type 2
Housing material	UL94-5VA
Agency listings †	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EEC and 2006/95/EC.
Noise level	<45 dB(A)
Quality standard	ISO 9001

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

### Dimensions

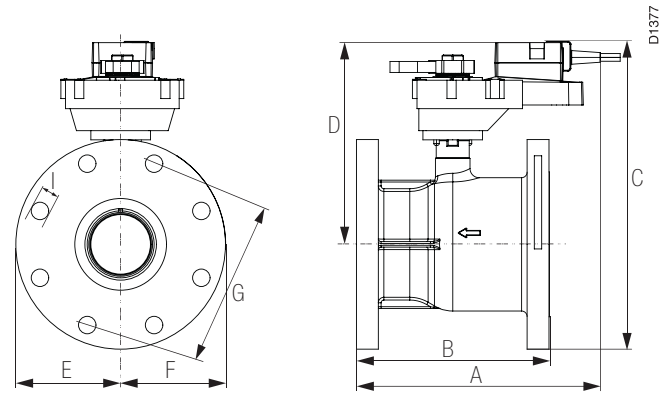

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter		Face-to-Face Length		Height
			A	B	B	C	C
B6400	4" [100]	F05	9.00" [228.6]	8.30" [210.8]	9.30" [235.9]		
B6500	5" [125]		10.00" [254]	10.30" [261.6]	10.50" [266.4]		
B6600	6" [150]		11.00" [279.4]	12.50" [317.5]	11.70" [296.9]		

### Wiring Diagrams

#### ✂️ INSTALLATION NOTES


- 1 Provide overload protection and disconnect as required.
- 2 Actuators may be connected in parallel. Power consumption and input impedance must be observed.

#### 📄 APPLICATION NOTES


- ◆ Meets cULus requirements without the need of an electrical ground connection.

#### ⚠️ WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

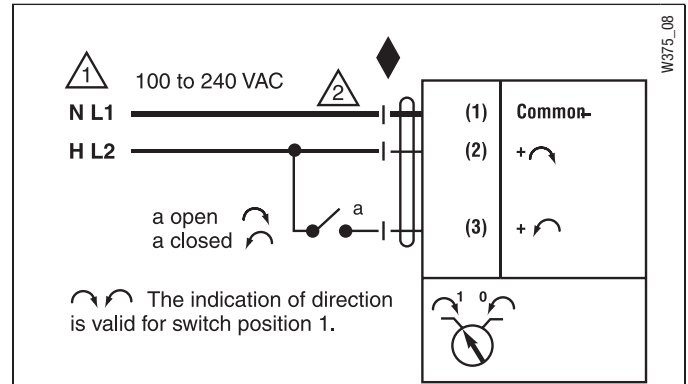

**On/Off control**

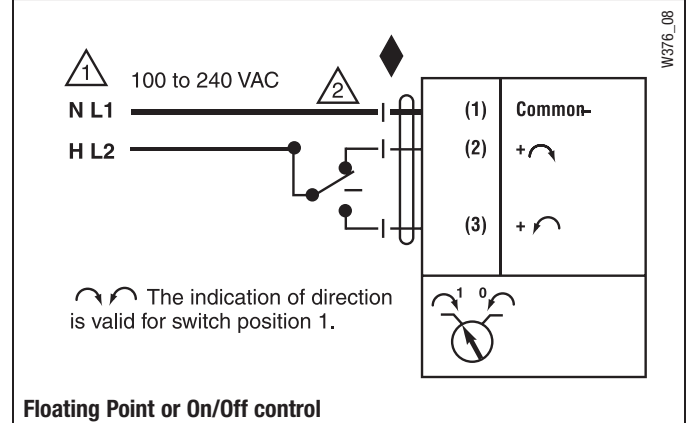

**Floating Point or On/Off control**




## Models

GRX24-MFT-5-14

Technical Data	
Control	2 to 10 VDC, 4 to 40 mA (default) variable (VDC, PWM, floating point, on/off)
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 4.5 W holding 1.5 W
Transformer sizing	7 VA (Class 2 power source)
Electrical connection	3 ft, 18 GA plenum rated cable ½" conduit connector 3 ft. [1m], 10 ft. [3m], 16 ft. [5m]
Overload protection	electronic throughout 0° to 95° rotation
Feedback output	2 to 10 VDC, 0.5 mA max, VDC variable
Input impedance	100 kΩ (0.1 mA, 500 Ω) 1500 Ω (PWM, floating point, on/off)
Angle of rotation	max. 95°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with  switch
Position indication	visual indicator
Running time	150 seconds (default) variable (75 to 300 seconds)
Manual override	external push button
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Housing	NEMA 2/IP54, Enclosure Type 2
Housing material	UL94-5V (flammability rating)
Agency listings †	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EEC and 2006/95/EC.
Noise level	<45 dB(A)
Quality standard	ISO 9001

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

## Dimensions

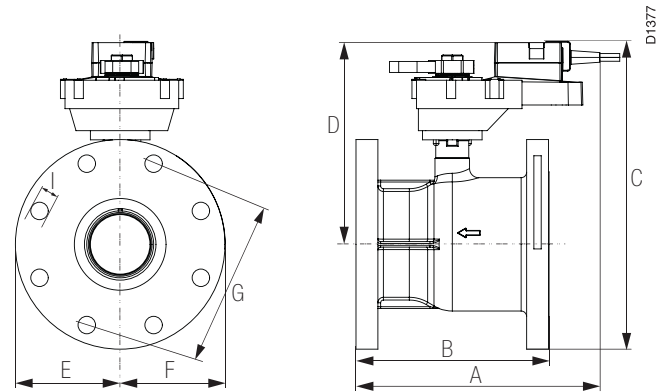

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter		Face-to-Face Length		Height
			A	B	B	C	C
B6400	4" [100]	F05	9.00" [228.6]	8.30" [210.8]	9.30" [235.9]		
B6500	5" [125]		10.00" [254]	10.30" [261.6]	10.50" [266.4]		
B6600	6" [150]		11.00" [279.4]	12.50" [317.5]	11.70" [296.9]		

**Wiring Diagrams**





**INSTALLATION NOTES**

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!** Actuators may be connected in parallel if not mechanically mounted to the same shaft. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 Position feedback cannot be used with Triac sink controller. The actuator internal common reference is not compatible.
- 5 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.
- 8 Contact closures A & B also can be triacs. A & B should both be closed for triac source and open for triac sink.
- 9 For triac sink the common connection from the actuator must be connected to the hot connection of the controller.

**APPLICATION NOTES**


- ◆ Meets UL requirements without the need of an electrical ground connection.
- ◆ The ZG-R01 500 Ω resistor may be used.

**WARNING Live Electrical Components!** During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

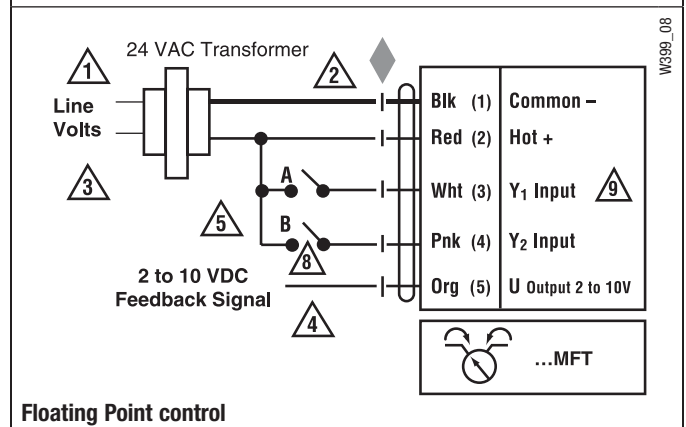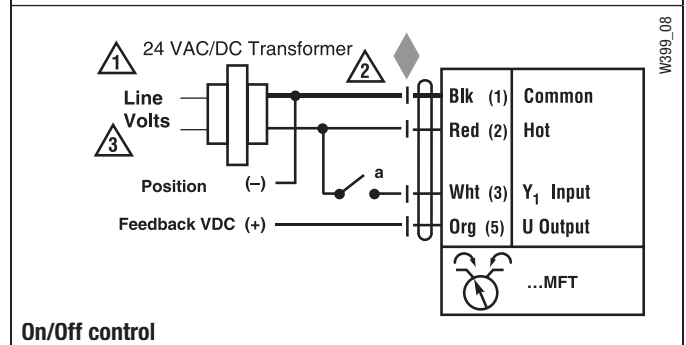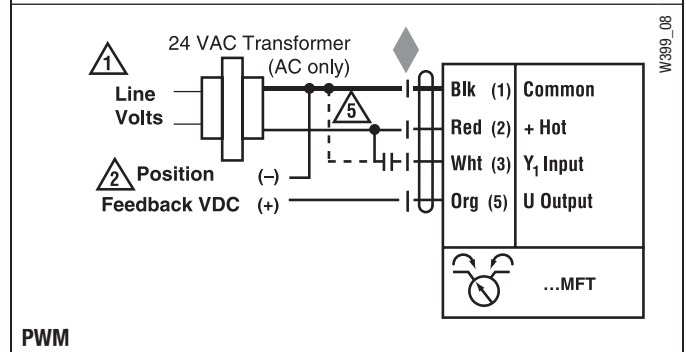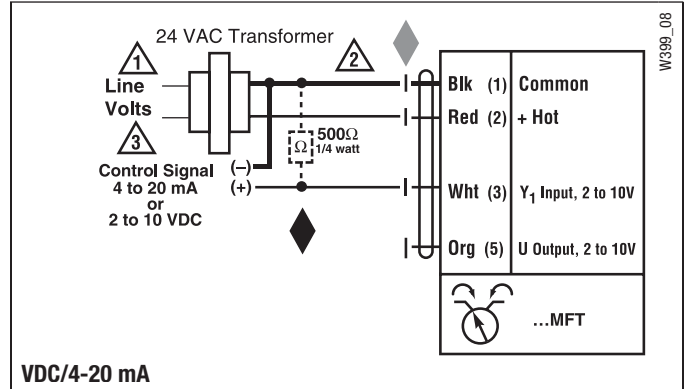

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

# TFRB(X) Actuators, On/Off

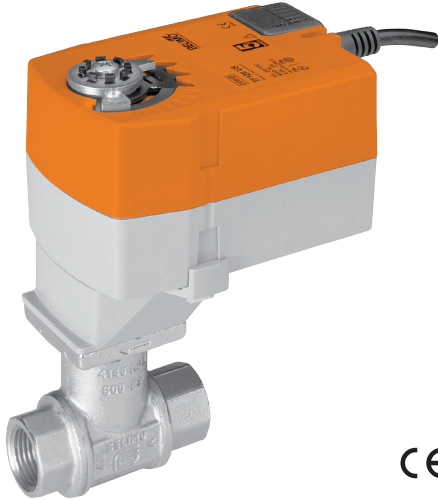

## Models

TFRB(X)24    TFRB(X)120  
 TFRB(X)24-S    TFRB(X)120-S    w/built-in Aux. Switch


Technical Data		
Control		on/off
Power supply		24VAC ± 20%, 50/60Hz
TFRB(X)24(-S)		24VDC ± 10%
TFRB(X)120(-S)		(nominal) 100 to 240 VAC, 50/60 Hz
		(tolerance) 85 to 265 VAC, 50/60 Hz
Power consumption	running	2.5 W
	holding	1.3 W
Transformer sizing		5 VA (class 2 power source)
TFRB(X)24(-S)		5 VA (class 2 power source)
TFRB(X)120(-S)		5 VA (class 2 power source)
Electrical connection		½" conduit connector
(-S models have 2 cables)		18 GA appliance cable
TFRB(X)24...		3 ft [1m]
TFRB(X)120		10 ft [3m]
		16 ft [5m]
Overload protection		electronic throughout 0° to 95° rotation
Angle of rotation		95°
Direction of rotation		reversible with protected  mounting
Position indication		visual indicator, 0° to 95°
Running time	motor	<75 seconds (0 to 18 in-lb)
	spring	<75 sec @ -22°F to 122°F [-20°C to 50°C]
Humidity		5 to 95% RH non-condensing
Ambient temperature		-22°F to 122°F [-30°C to 50°C]
Storage temperature		-40°F to 176°F [-40°C to 80°C]
Housing		NEMA type 2/IP42
Housing material		UL94 - 5VA
Agency listings†		cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level (max)	running	<40 db (A)
	spring return	<40 dB (A)
Quality standard		ISO 9001

## TFRB(X)...-S

Auxiliary switch    1 x SPDT, 3A (0.5A) @ 250 VAC, UL Listed adjustable 0° to 95°


† Rated impulse voltage 800V (4kV for 120V model), Control pollution degree 3, Type of action 1.AA (1.AA.B for -S models)

## Dimensions with 2-Way Valve

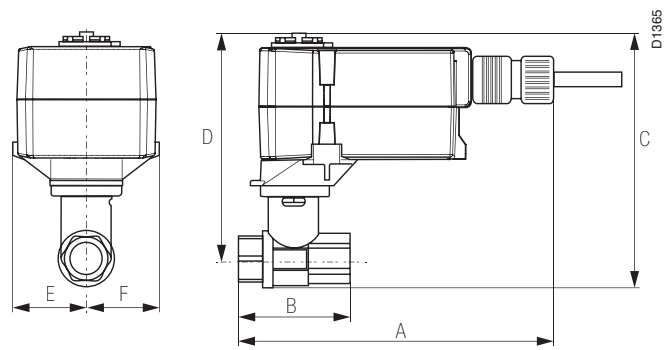

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	½"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	½"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B221(B)	¾"	20	2.73" [69.3]	1.87" [47.4]

## Dimensions with 3-Way Valve

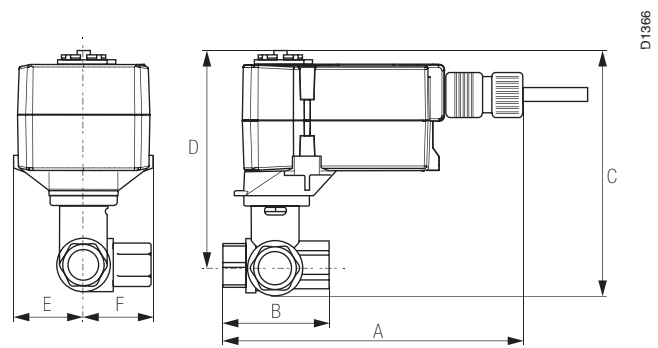

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B321(B)	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]

**Wiring Diagrams**


**INSTALLATION NOTES**

- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.


**APPLICATION NOTES**

- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

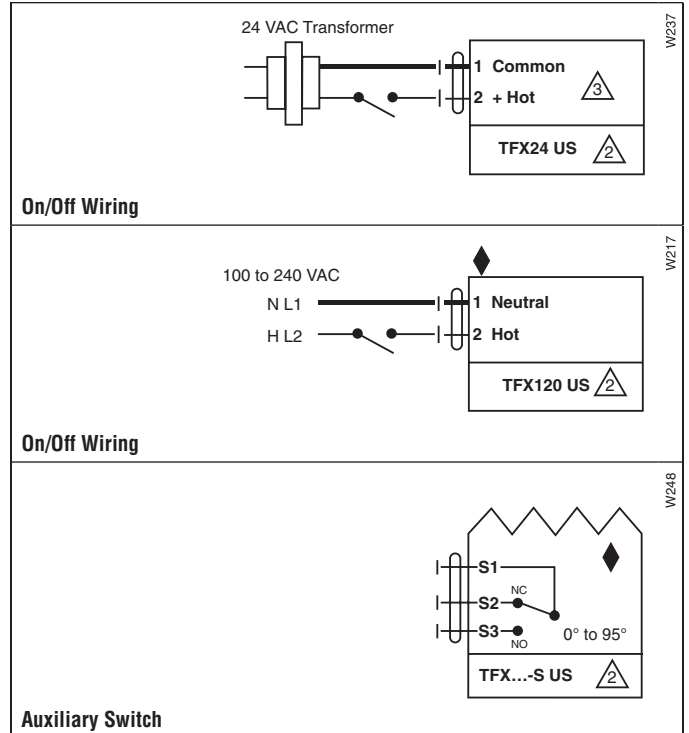

# TFRB(X)24-3 Actuators, Floating Point

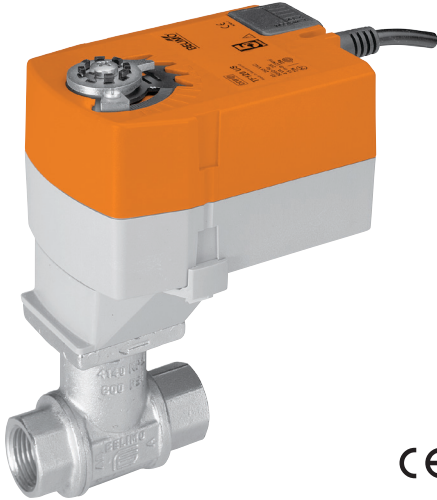

## Models

TFRB(X)24-3  
TFRB(X)24-3-S w/built-in Aux. Switch


Technical Data	
Control	floating point
Power supply	24VAC ± 20%, 50/60Hz
Power consumption	running 2.5 W holding 1.0 W
Transformer sizing	4 VA (class 2 power source)
Electrical connection (-S models have 2 cables) TFRB(X)24-3...	½" conduit connector 18 GA plenum rated cable 3 ft [1m] 10 ft [3m] 16 ft [5m]
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	1000 Ω (0.6w) control inputs
Angle of rotation	95°
Direction of rotation	spring reversible with CW/CCW mounting motor reversible with built-in ↻/↻ switch
Position indication	visual indicator, 0° to 95°
Running time	motor 95 sec constant, independent of load spring <25 sec @ -4°F to 122°F [-20°C to 50°C] <60 sec @ -22°F [-30°C]
Humidity	5 to 95% RH non-condensing
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA type 2/IP42
Housing material	UL94 - 5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level (max)	running <35 db (A) spring return 62 db (A)
Quality standard	ISO 9001

## TFRB(X)24-3-S US

Auxiliary switch 1 x SPDT, 3A (0.5A) @ 250 VAC, UL Listed, adjustable 0° to 95°


† Rated impulse voltage 800V (4kV for 120V model), Control pollution degree 3, Type of action 1.AA (1.AA.B for -S models)

## Dimensions with 2-Way Valve

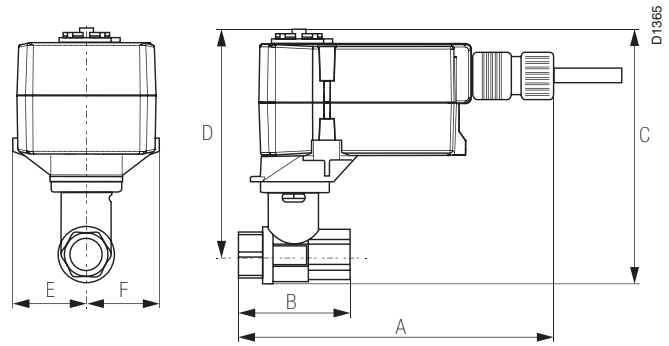

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	½"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	½"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B221(B)	¾"	20	2.73" [69.3]	1.87" [47.4]

## Dimensions with 3-Way Valve

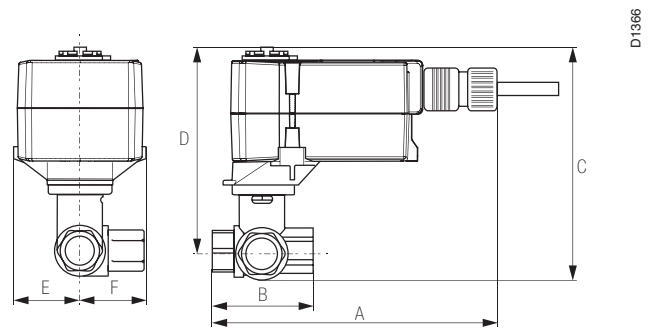

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B321(B)	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.



### Wiring Diagrams


#### INSTALLATION NOTES

- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 The common connection from the actuator must be connected to the Hot connection of the controller.
- 4 The actuator Hot must be connected to the control board common.
- 5 For end position indication, interlock control, fan startup, etc., TF24-3-S US incorporates one built-in auxiliary switch: 1 x SPDT, 3A (0.5A) @250 VAC, UL listed, adjustable 0° to 95°.
- 7 Actuators with plenum rated cable do not have numbers on wires; use color coded instead. Actuators with appliance rated cable use numbers.


#### APPLICATION NOTES

- Meets cULus or UL and CSA requirements without the need of an electrical ground connection.


**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

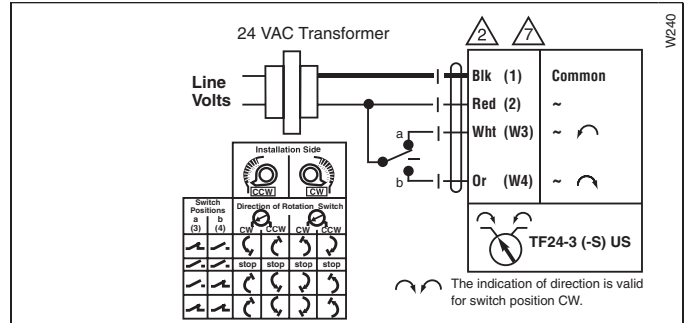


Floating point control

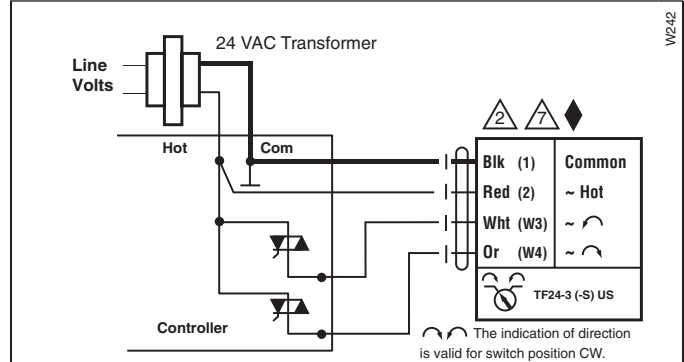

Triac source

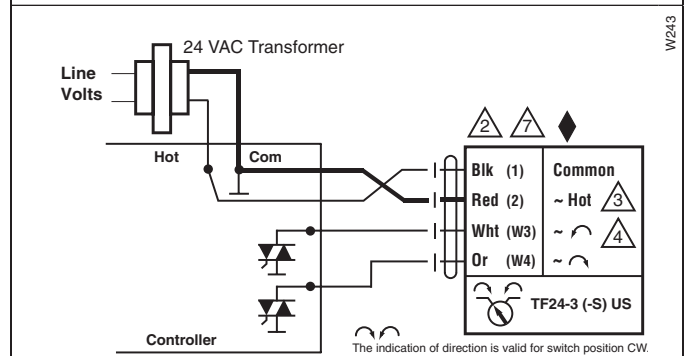


Triac sink with separate transformers

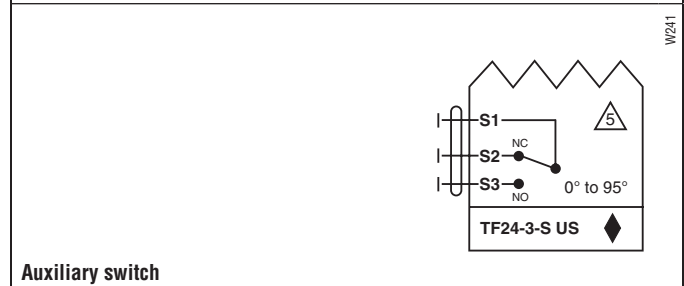

Auxiliary switch

# TFRB(X)24-SR Actuators, Proportional

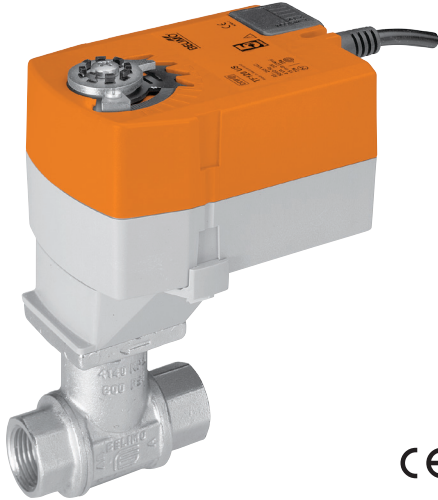

## Models

TFRB(X)24-SR  
TFRB(X)24-SR-S w/built-in Aux. Switch


Technical Data	
Control	proportional
Power supply	24 VAC ± 20%, 50/60 Hz 24 VDC ± 10%
Power consumption	running 2.5 W holding 1.0 W
Transformer sizing	4 VA (class 2 power source)
Electrical connection (-S models have 2 cables) TFRB(X)24-SR...	½" conduit connector 18 GA plenum rated cable 3 ft [1m] 10 ft [3m] 16 ft [5m]
Electrical protection	actuators are double insulated
Overload protection	electronic throughout 0° to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20 mA
Input impedance	100k Ω (0.1mA), 500 Ω
Feedback Output U	2-10 VDC
Angle of rotation	95°
Direction of rotation	spring reversible with CW/CCW mounting motor reversible with built-in switch
Position indication	visual indicator, 0° to 95°
Running time	motor 95 sec constant, independent of load spring <25 sec @ -4°F to 122°F [-20°C to 50°C] <60 sec @ -22°F [-30°C]
Humidity	5 to 95% RH non-condensing
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA type 2/IP42
Housing material	UL94 - 5VA
Agency listings†	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level (max)	running <35 db (A) spring return <62 db (A)
Quality standard	ISO 9001

## TFRB(X)24-SR-S

Auxiliary switch 1 x SPDT, 3A (0.5A) @ 250 VAC, UL Listed, adjustable 0° to 95°


† Rated impulse voltage 800V (4kV for 120V model), Control pollution degree 3, Type of action 1.AA (1.AA.B for -S models)

## Dimensions with 2-Way Valve

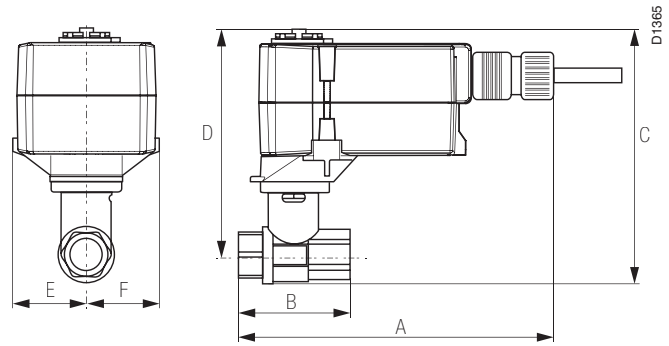

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	½"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	½"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B221(B)	¾"	20	2.73" [69.3]	1.87" [47.4]

## Dimensions with 3-Way Valve

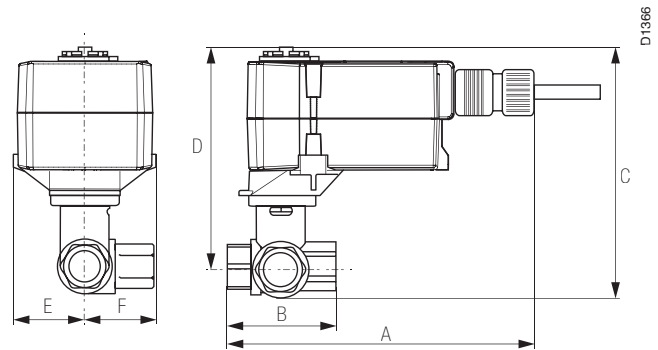

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B321(B)	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

**Wiring Diagrams**

**INSTALLATION NOTES**


- 2** **CAUTION Equipment damage!**  
Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 4** Up to 4 actuators may be connected in parallel. With 4 actuators wired to one 500 Ω resistor, a +2% shift of control signal may be required. Power consumption must be observed.
- 3** Actuators may also be powered by 24 VDC.
- 5** Only connect common to neg. (—) leg of control circuits.
- 6** Actuators with plenum rated cable do not have numbers on wires; use color codes instead.
- 7** For end position indication, interlock control, fan startup, etc., TF24-SR-S US incorporates one built-in auxiliary switch: 1 x SPDT, 3A (0.5A ) @250 VAC, UL listed, adjustable 0° to 95°.


**APPLICATION NOTES**

- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

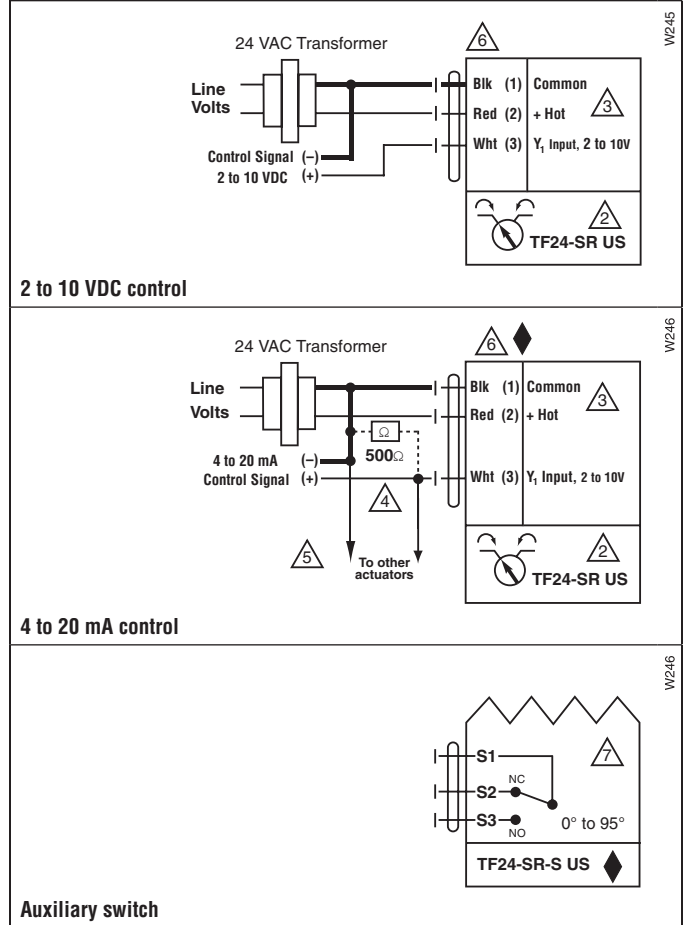

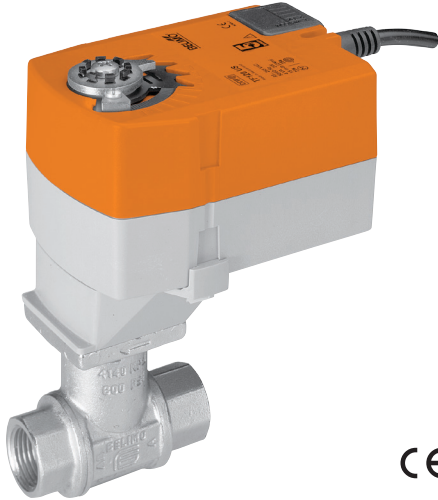

MFT



## Models


TFRX24-MFT

Technical Data		
Control		MFT
Power supply		24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running	2.5 W
	holding	1.0 W
Transformer sizing		4 VA (class 2 power source)
Electrical connection		½" conduit connector 3 ft [1m], 18 GA plenum rated cable
Overload protection		electronic throughout 0° to 95° rotation
Operating range Y*		2 to 10 VDC, 4 to 20 mA (default) variable (VDC, PWM, floating point, on/off)
Feedback output U*		2 to 10 VDC, 0.5 mA max
Input impedance		100 kΩ for 2 to 10 VDC (0.1 mA) 500 Ω for 4 to 20 mA 1500 Ω for PWM, floating point and on/off control
Mechanical angle of rotation*		95°
Angle of rotation adaptation*		Off (Default)
Direction of rotation	spring motor	reversible with CW/CCW mounting reversible with built-in switch
Position indication		visual indicator, 0° to 95°
Override control*		Min. (Min Position) = 0% - ZS (Mid. Position) = 50% - Max. (Max. Position) = 100%
Running time	motor*	95 seconds constant independent of load
	spring	<25 seconds @ -4°F to 122°F [-20°C to 50°C] <60 seconds @ -22°F [-30°C]
Humidity		5 to 95% RH, non-condensing
Ambient temperature		-22 to 122° F (-30 to 50° C)
Storage temperature		-40 to 176° F (-40 to 80° C)
Housing		NEMA 2/IP42
Housing material		UL 94-5VA
Agency listings†		cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC and 2006/95/EC for line voltage and/or -S versions
Noise level (max)	running	<35 dB (A)
	spring return	<65 dB (A)
Quality standard		ISO 9001

\* Variable when configured with MFT options


† Rated impulse voltage 0.8 kV, Control pollution degree 3, Type of action 1.AA.

## Dimensions with 2-Way Valve

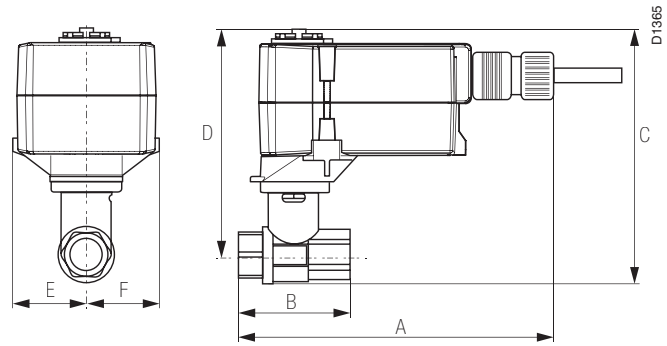

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	½"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	½"	15	2.38" [60.4]	1.78" [45.2]
B217-B221	¾"	20	2.73" [69.3]	1.87" [47.4]

## Dimensions with 3-Way Valve

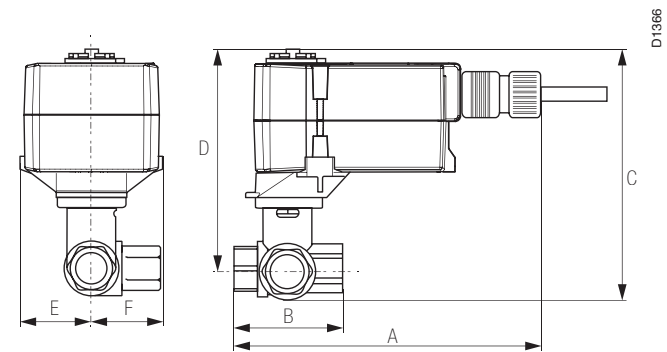



Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B321	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]

### Wiring Diagrams

#### INSTALLATION NOTES


- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 ZG-R01 may be used.

**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

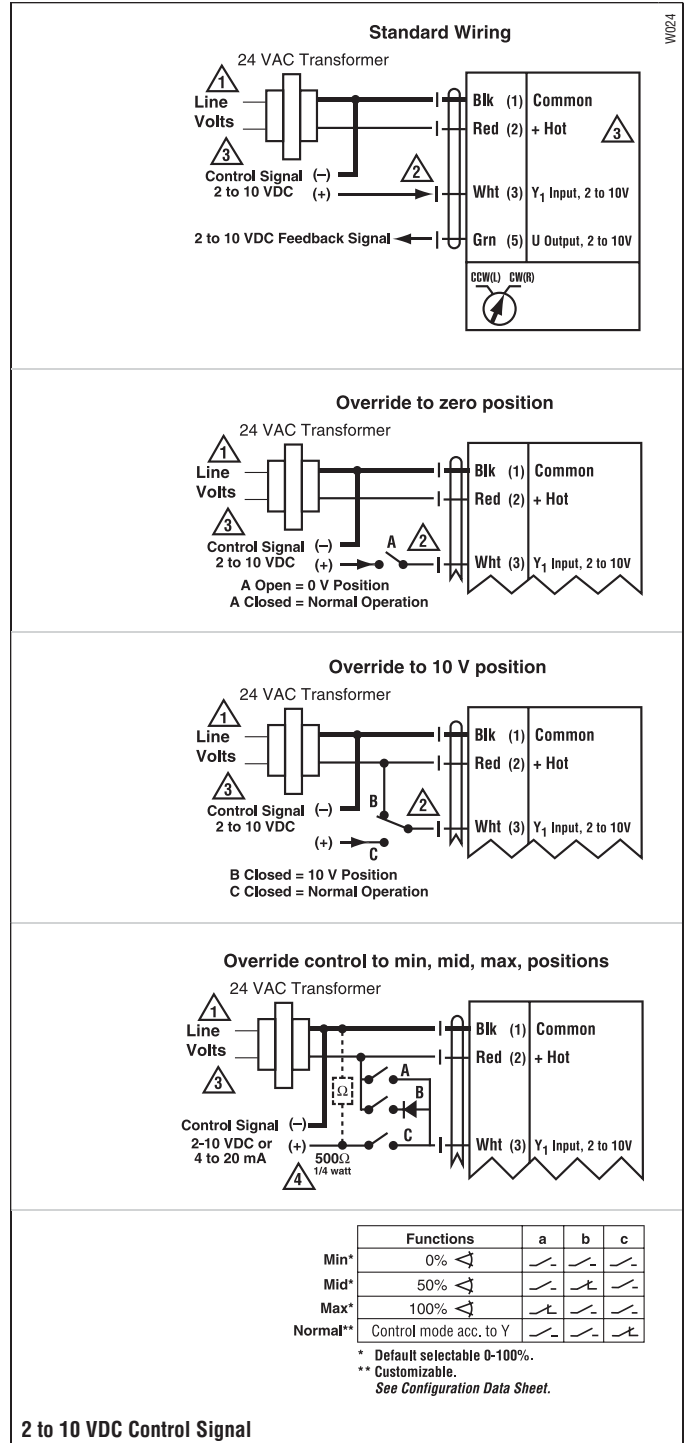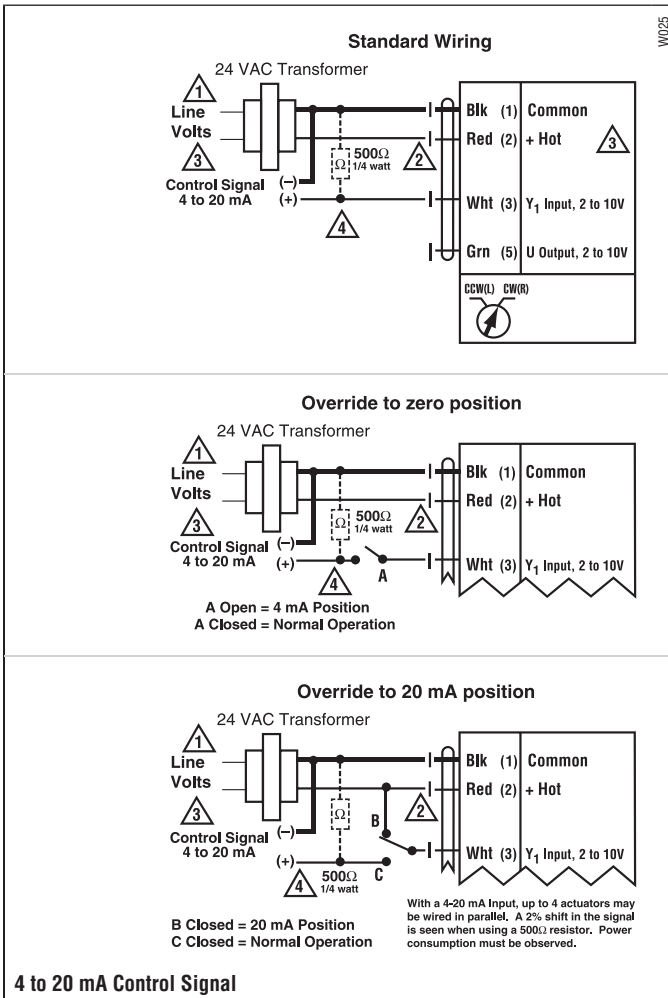

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

# LF Actuators, On/Off

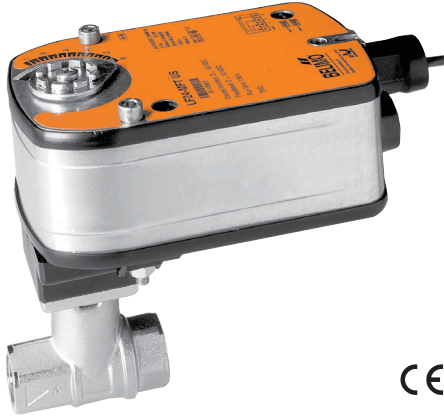

## Models


LF24 US	
LF24-S US	w/built-in Aux. Switch
LF120 US	
LF120-S US	w/built-in Aux. Switch

Technical Data	
Control	on/off, floating point
Power supply	
LF24(-S) US	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
LF120(-S) US	120 VAC ± 10% 50/60 Hz
Power consumption	
LF24(-S) US	running 5 W holding 2.5 W
LF120(-S) US	running 5.5 W holding 3.5 W
Transformer sizing	
LF24(-S) US	7 VA, class 2 power source
LF120(-S) US	7.5 VA, class 2 power source
Electrical connection	½" conduit connector 3 ft [1m], 18 GA appliance cable
Electrical protection	120V actuators double insulated
Overload protection	electronic throughout rotation
Angle of rotation	95°
Spring return direction	reversible with CW/CCW mounting
Position indication	visual indicator 0° to 90°
Running time	motor <40 to 75 seconds (on/off) spring <25 sec. @-4°F to 122°F [-20°C to 50°C] <60 sec. @-22°F [-30°C]
Ambient temperature	-22° F to 122° F [-30° C to 50° C]
Housing	NEMA 2
Agency listings†	cULus according to UL 873 and CAN/CSA C22.2 No. 24-93
Noise level (max)	running <30 db(A) spring return 62 db(A)
Quality standard	ISO 9001

LF...-S US	
Auxiliary switch	1 x SPDT, 6A (1.5A) @ 250 VAC, UL Listed, adjustable 0° to 95° (double insulated)


† Rated impulse voltage 800V (4kV for 120V model), Control pollution degree 3, Type of action 1.AA (1.AA.B for -S models)

## Dimensions with 2-Way Valve

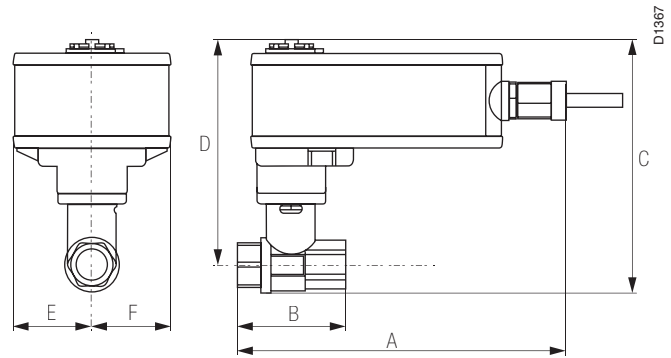

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	½"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	½"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B220(B)	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

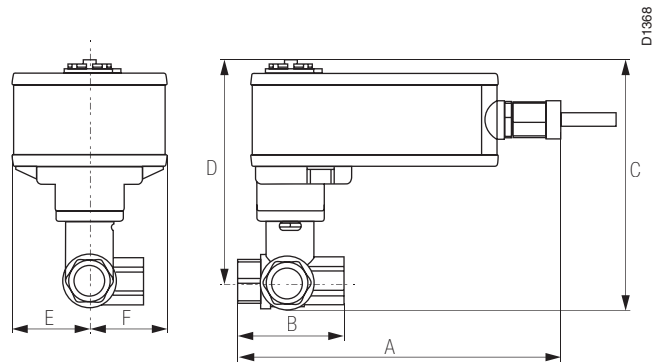

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B320(B)	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams

#### ✂️ INSTALLATION NOTES

1 Provide overload protection and disconnect as required.

2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel.  
Power consumption must be observed.


3 Actuator may also be powered by 24 VDC.

4 For end position indication, interlock control, fan startup, etc., LF24-S US and LF120-S US incorporates a built-in auxiliary switch: 1 x SPDT, 6A (1.5A) @ 250 VAC, UL listed, adjustable 0° to 95°.


#### 📄 APPLICATION NOTES

◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

⚠️ **WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

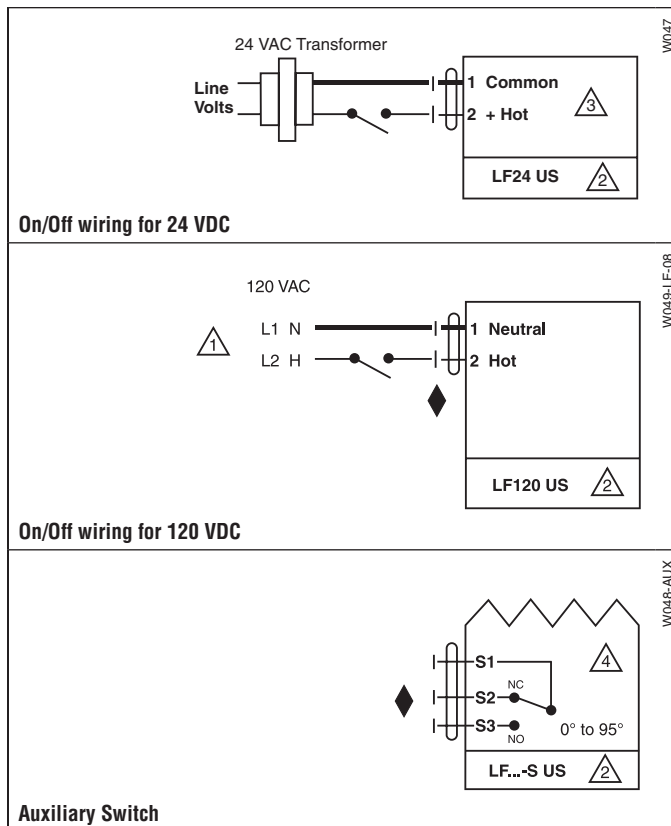

# LF24-3 Actuators, Floating Point

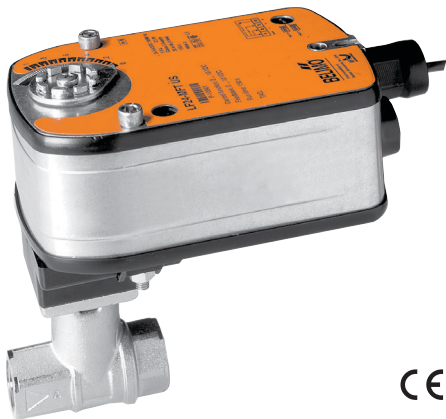


## Models

LF24-3 US  
LF24-3-S US w/built-in Aux. Switch

Technical Data	
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 2.5 W holding 1W
Transformer sizing	5 VA (class 2 power source)
Electrical connection	½" conduit connector (-S models have 2 cables) 3 ft [1m], 18 GA appliance cable
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	1000 Ω (0.6w) control inputs
Angle of rotation	95°
Direction of rotation	spring reversible with CW/CCW mounting motor reversible with built-in  switch
Position indication	visual indicator 0° to 90°
Running time	motor 150 seconds constant independent of load spring <25 seconds @ -4°F to 122°F [-20°C to 50°C] <60 seconds @ -22°F [-30°C]
Humidity	5 to 95% RH non-condensing
Ambient temperature	-22° F to 122° F [-30° C to 50° C]
Storage temperature	-40° F to 176° F [-40° C to 80° C]
Housing	NEMA type 2/IP54
Housing material	zinc coated metal
Agency listings	cULus according to UL 873 and CAN/CSA C22.2 No. 24-93
Noise level (max)	running <30 db(A) spring return 62 db(A)
Servicing	maintenance free
Quality standard	ISO 9001


LF24-3-S US	
Auxiliary switch	1 x SPDT, 6A (1.5A) @ 250 VAC, UL Listed, adjustable 0° to 95° (double insulated)

## Dimensions with 2-Way Valve

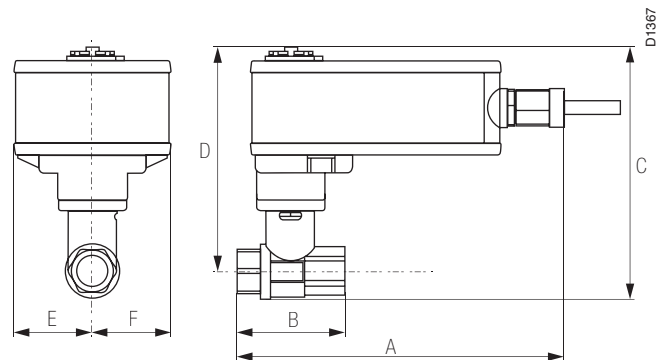

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	½"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	½"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B220(B)	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

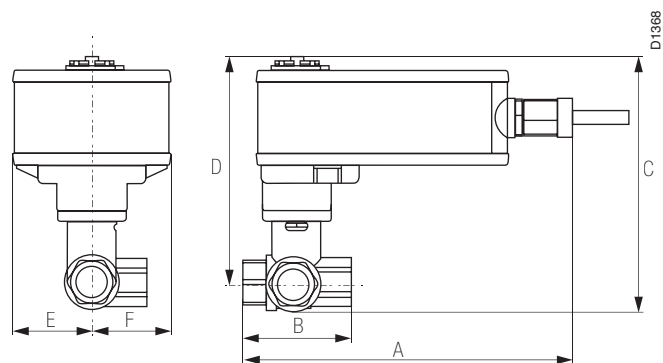

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B320(B)	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.



### Wiring Diagrams


#### INSTALLATION NOTES

- CAUTION Equipment damage!**
- 2 Actuators may be connected in parallel. Power consumption must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 The common connection from the actuator must be connected to the Hot connection of the controller.
- 5 The actuator Hot must be connected to the control board common.
- 6 For end position indication, interlock control, fan startup, etc., LF24-3-S US incorporates one built-in auxiliary switch: 1 x SPDT, 6A (1.5A) @ 250 VAC, UL listed, adjustable 0° to 95°.
- 8 Actuators with plenum rated cable do not have numbers on wires; use color coded instead. Actuators with appliance rated cable use numbers.


#### APPLICATION NOTES

- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.


**WARNING Live Electrical Components!**  
 During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

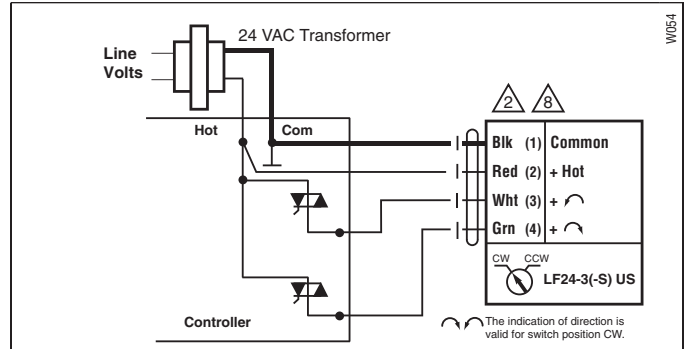


Triac source

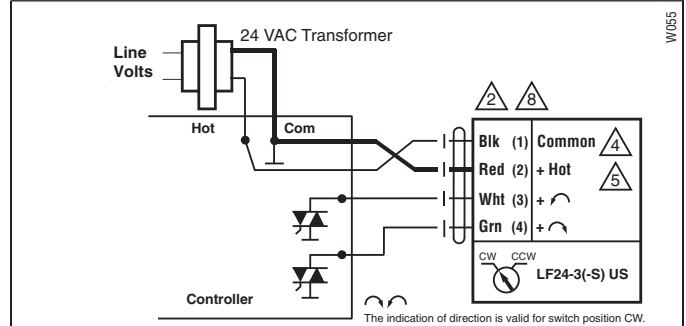


Triac sink

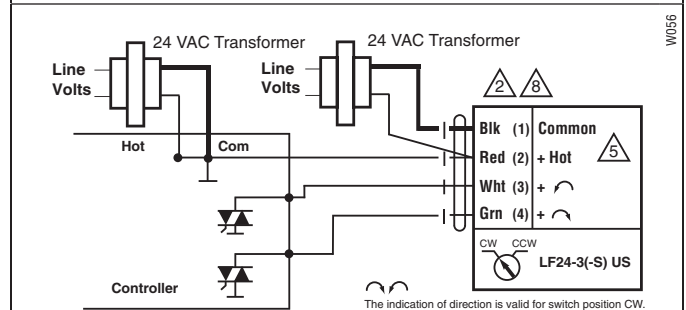


Triac sink with separate transformers

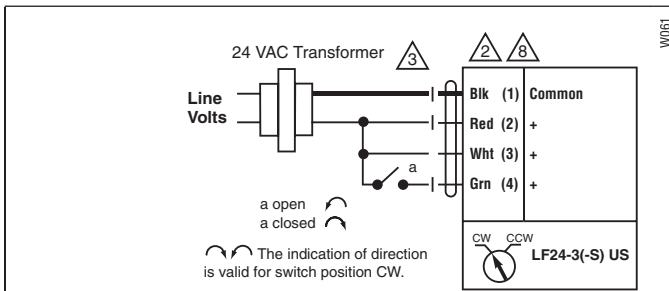

On/Off control

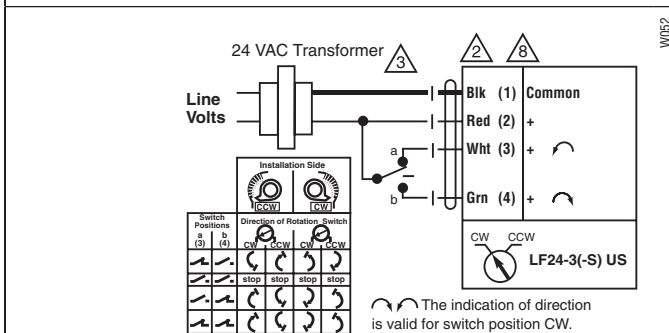


Floating Point control

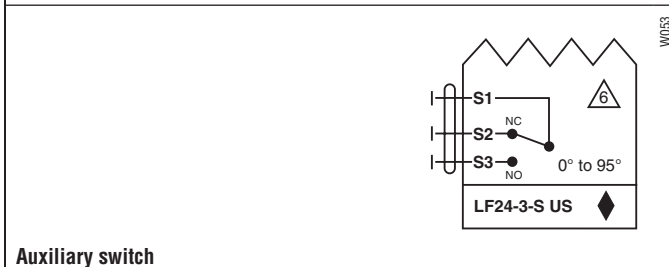

Auxiliary switch

# LF24-SR Actuators, Proportional

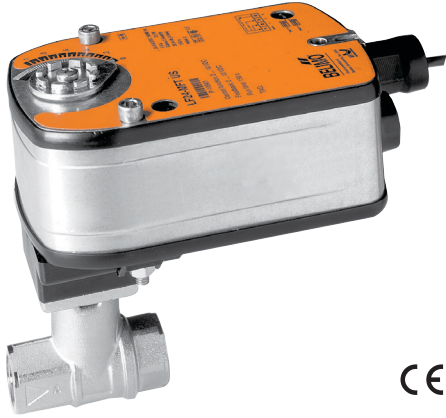


## Models

LF24-SR US  
LF24-SR-S US w/built-in Aux. Switch

Technical Data	
Control	proportional
Control signal	2 to 10 VDC 4 to 20 mA (with 500 Ω resistor)
Power consumption	running 2.5 W holding 1 W
Transformer sizing	5 VA, class 2 power
Electrical connection	½" conduit connector
(-S models have 2 cables)	3 ft [1m], 18 GA appliance cable
Overload protection	electronic throughout 0° to 95° rotation
Feedback output	2 to 10 VDC
Input impedance	100 kΩ
Angle of rotation	95°
Direction of rotation	spring reversible with CW/CCW mounting motor reversible with built-in ↻/↺ switch
Position indication	visual indicator
Running time	motor 150 sec. independent of load (proportional) spring <25 seconds @ -4°F to 122°F [-20°C to 50°C] <60 seconds @ -22°F [-30°C]
Ambient temperature	-22° F to 122° F [-30° C to 50° C]
Housing	NEMA 2
Agency listings	cULus according to UL 873 and CAN/CSA C22.2 No. 24-93
Noise level (max)	running <30 db(A) spring return 62 db(A)
Quality standard	ISO 9001


LF24-SR-S US	
Auxiliary switch	1 x SPDT, 6A (1.5A) @ 250 VAC, UL Listed, adjustable 0° to 95° (double insulated)

## Dimensions with 2-Way Valve

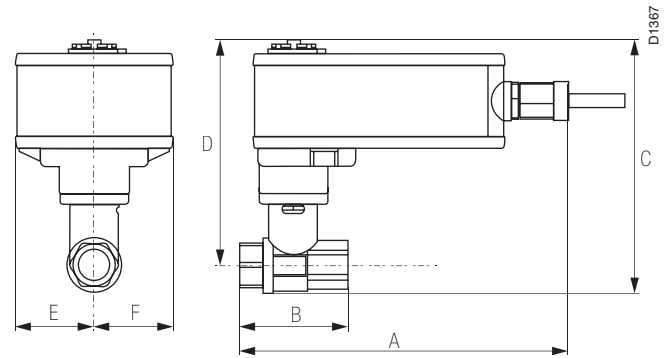

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207(B)-B211(B)	½"	15	2.41" [61.1]	1.39" [35.2]
B212(B)-B215(B)	½"	15	2.38" [60.4]	1.78" [45.2]
B217(B)-B220(B)	¾"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1¼"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

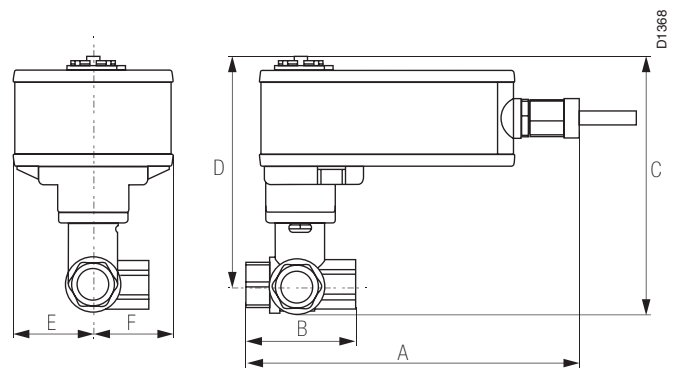

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307(B)-B311(B)	½"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312(B)-B315(B)	½"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317(B)-B320(B)	¾"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams


#### ✂️ INSTALLATION NOTES

- ⚠️ **CAUTION Equipment damage!**  
Actuators may be connected in parallel. Up to 4 actuators may be connected in parallel. With 4 actuators wired to one 500 Ω resistor, a +2% shift of control signal may be required. Power consumption must be observed.
- ⚡ Actuators may also be powered by 24 VDC.
- ⚡ Actuators with plenum rated cable do not have numbers on wires; use color codes instead.
- ⚡ Only connect common to neg. (-) leg of control circuits.
- ⚡ For end position indication, interlock control, fan startup, etc., LF24-SR-S US incorporates one built-in auxiliary switch: 1 x SPDT, 6A (1.5A) @ 250 VAC, UL listed, adjustable 0° to 95°.
- ⚡ The LF24-SR-S US wire 5 is white.


#### 📄 APPLICATION NOTES

- ◆ The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.
- ◆ Meets cULus or UL and CSA requirements without the need of an electrical ground connection.

⚠️ **WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

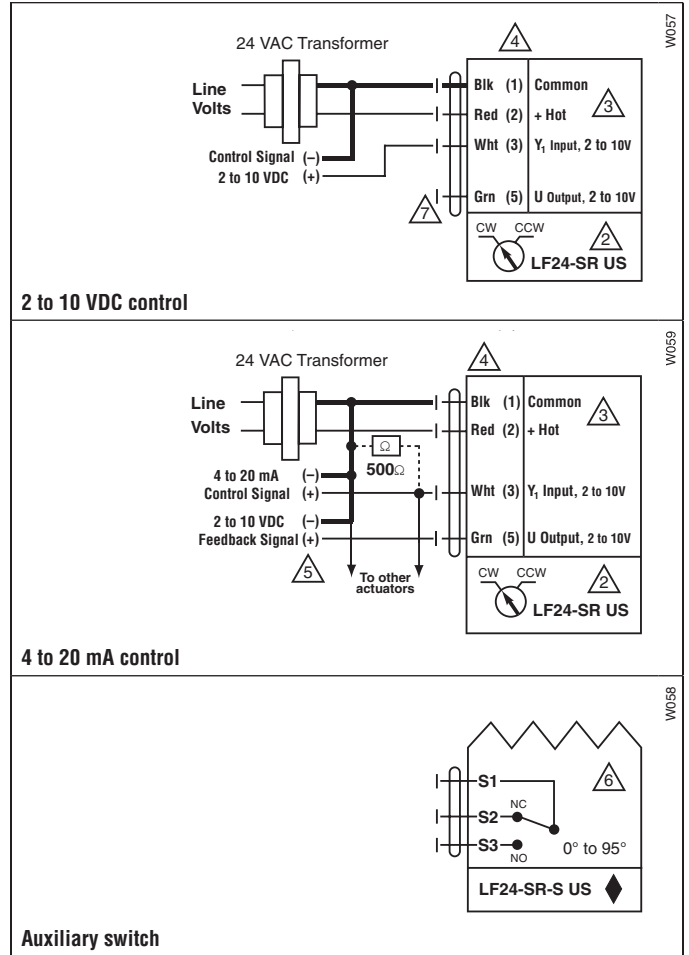

# LF24-MFT Actuators, Multi-Function Technology

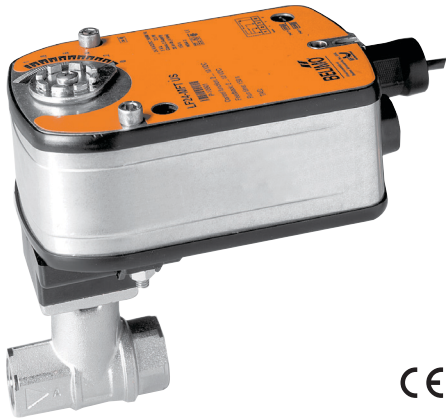

MFT




## Models

LF24-MFT US  
LF24-MFT-S US w/built-in Aux. Switch

Technical Data	
Control	MFT
Control signal	2 to 10 VDC
Power consumption	running 2.5 W holding 1 W
Transformer sizing	5 VA (class 2 power source)
Electrical connection	1/2" conduit connector
(-S models have 2 cables)	3 ft [1m], 18 GA appliance cable
Overload protection	electronic throughout 0° to 95° rotation
Feedback output	2 to 10 VDC, 0.5 mA max
Input impedance	100 kΩ for 2 to 10 VDC (0.1 mA) 500 Ω for 4 to 20mA 750 Ω for PWM 500 Ω for on/off and floating point
Angle of rotation	95°
Direction of rotation	spring reversible with CW/CCW mounting motor reversible with built-in  switch
Position indication	visual indicator
Running time	motor 150 seconds independent of load (proportional, default) spring <25 seconds @ -4°F to 122°F [-20°C to 50°C] <60 seconds @ -22°F [-30°C]
Ambient temperature	-22° F to 122° F [-30° C to 50° C]
Housing	NEMA 2
Agency listings	cULus according to UL 873 and CAN/CSA C22.2 No. 24-93
Noise level (max)	running <30 db(A) spring return 62 db(A)
Quality standard	ISO 9001


LF24-MFT-S US	
Auxiliary switch	1 x SPDT, 6A (1.5A) @ 250 VAC, UL Listed, adjustable 0° to 95° (double insulated)

## Dimensions with 2-Way Valve

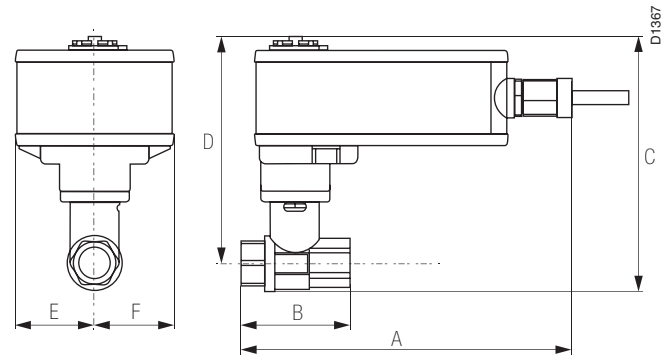

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B207-B211	1/2"	15	2.41" [61.1]	1.39" [35.2]
B212-B215	1/2"	15	2.38" [60.4]	1.78" [45.2]
B217-B220	3/4"	20	2.73" [69.3]	1.87" [47.4]
B222-B225	1"	25	3.09" [78.4]	1.87" [47.4]
B229-B230	1 1/4"	32	3.72" [94.6]	1.87" [47.4]

## Dimensions with 3-Way Valve

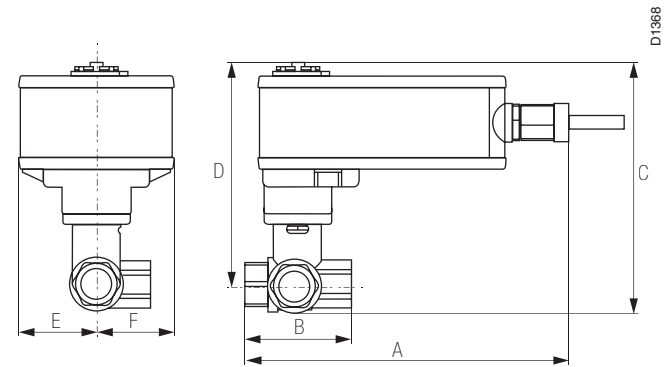

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B307-B311	1/2"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]
B312-B315	1/2"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]
B317-B320	3/4"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]
B322-B325	1"	25	3.09" [78.4]	1.87" [47.4]	1.59" [40.3]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

**Wiring Diagrams**

**INSTALLATION NOTES**

- 2 **CAUTION Equipment damage!**  
Actuators may be connected in parallel if not mechanically mounted to the same shaft. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 IN4004 or IN4007 diode (IN4007 supplied, Belimo part number 40155).
- 5 Triac A and B can also be contact closures.
- 6 Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 VAC line.
- 7 Position feedback cannot be used with Triac sink controller. The actuators internal common reference is not compatible.

**APPLICATION NOTES**

- ◆ The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC, up to 2 actuators may be connected in parallel.

**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

24 VAC/DC Transformer

W043

24 VAC Transformer (AC only)

W041

24 VAC Transformer (AC only)

W302

24 VAC/DC Transformer

W303

**Proportional 2 to 10 or 4 to 20 mA control signal**

With a 4-20 mA Input, up to 4 actuators may be wired in parallel. A 2% shift in the signal is seen when using a 500Ω resistor. Power consumption must be observed.

# AFRB24(-S), AFRX24(-S) Actuators, On/Off



## Models

AFRB24  
AFRB24-S  
AFRX24  
AFRX24-S

### Technical Data


Power supply	24 VAC $\pm$ 20% 50/60 Hz 24 VDC +20% / -10%
Power consumption	running 5 W holding 2.5 W
Transformer sizing	7.5 VA (class 2 power source)
Electrical connection	AFRB24... 3 ft., 18 GA appliance cable, 1/2" conduit connector -S models: two 3 ft., 18 gauge appliance cables with 1/2" conduit connectors AFRX24... 3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] 18 GA appliance or plenum cables, with or without 1/2" conduit connector -S models: two 3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] appliance cables, with or without 1/2" conduit connectors
Overload protection	electronic throughout 0 to 95° rotation
Control	on/off
Direction of rotation	spring reversible with CW/CCW mounting
Angle of rotation	95°
Running time	motor < 75 seconds spring 20 seconds @ -4°F to 122°F [-20°C to 50°C]; < 60 seconds @ -22°F [-30°C]
Position indication	visual indicator, 0° to 95° (0° is full spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2, IP54, Enclosure Type2
Agency listings †	cULus according to UL60730-1A/-2-14, CAN/GSA E60730-1:02, CE according to 2004/108/EC & 2006/95/EC
Noise level	<50dB(A) motor @ 75 seconds <62dB(A) spring return
Quality standard	ISO 9001

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

### AFRB24-S, AFRX24-S


Auxiliary switches	2 x SPDT 3A (0.5A) @ 250 VAC, UL approved one set at +10°, one adjustable 10° to 90°
--------------------	--

### Dimensions

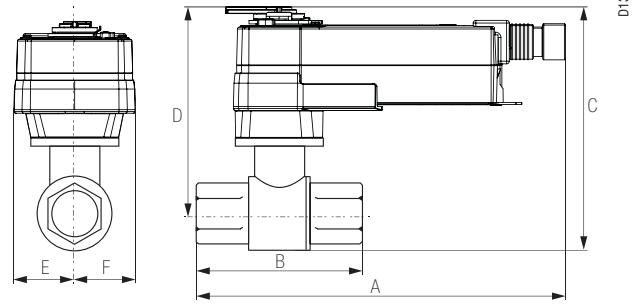

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B212-B216	1/2"	15	2.38" [60.4]	1.72" [43.7]
B217-B221	3/4"	20	2.73" [69.3]	1.81" [45.9]
B222-B225	1"	25	3.09" [78.4]	1.81" [45.9]
B229-B230	1 1/4"	32	3.72" [94.6]	1.81" [45.9]
B231-B232	1 1/4"	32	3.72" [94.6]	1.98" [50.4]
B238-B240	1 1/2"	40	3.88" [98.5]	1.98" [50.4]
B248-B250	2"	50	4.21" [107.0]	2.21" [56.2]
B251-B254	2"	50	4.93" [125.2]	2.68" [68.0]
B261-B265	2 1/2"	65	5.55" [140.9]	2.68" [68.0]
B277-B280	3"	80	5.82" [147.9]	2.68" [68.0]

### Dimensions

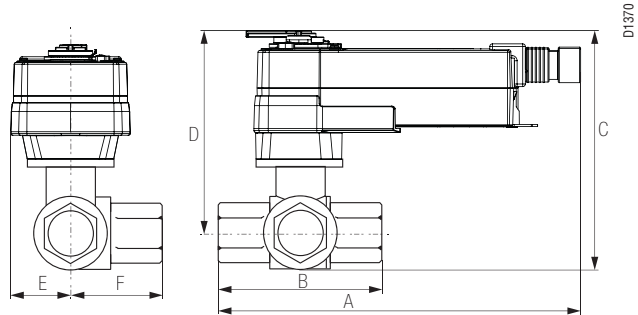

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B312-B316	1/2"	15	2.38" [60.4]	1.72" [43.7]	1.26" [32.1]
B317-B321	3/4"	20	2.73" [69.3]	1.81" [45.9]	1.45" [36.8]
B322-B325	1"	25	3.09" [78.4]	1.81" [45.9]	1.56" [39.8]
B329-B331	1 1/4"	32	3.96" [100.6]	2.21" [56.2]	2.14" [54.3]
B338-B341	1 1/2"	40	4.39" [111.6]	2.45" [62.2]	2.33" [59.1]
B347-B352	2"	50	4.90" [124.5]	2.68" [68.0]	2.60" [66.0]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Wiring Diagrams


#### ✂️ INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 For end position indication, interlock control, fan startup, etc., AFRB24-S and AFRX24-S incorporates two built-in auxiliary switches: 2 x SPDT, 3A (0.5A) @250 VAC, UL Approved, one switch is fixed at +10°, one is adjustable 10° to 90°.


#### 📄 APPLICATION NOTES

- ◆ Meets cULus requirements without the need of an electrical ground connection.

- ⚠️ **WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

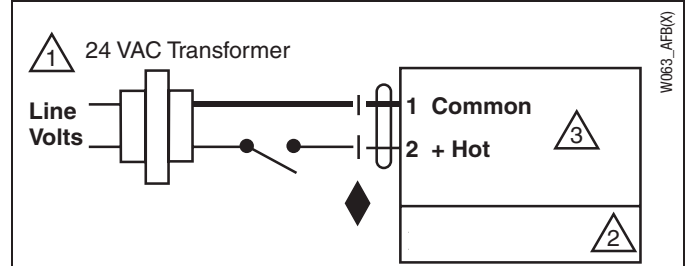

On/Off wiring for AFRB24, AFRX24

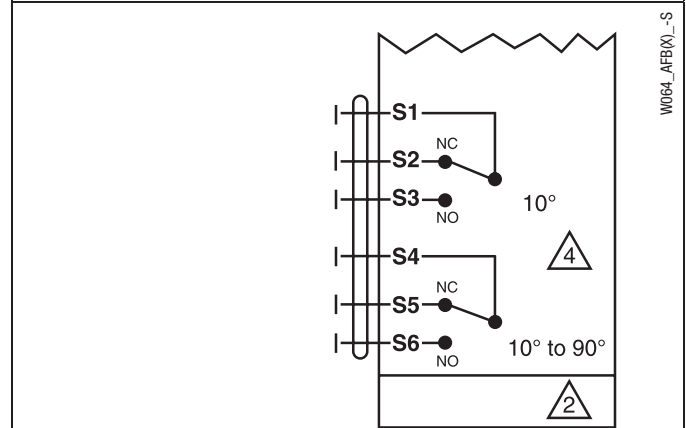

Auxiliary Switches for AFRB24-S, AFRX24-S

# AFRBUP(-S), AFRXUP(-S) Actuators, On/Off



## Models

AFRBUP  
AFRBUP-S  
AFRXUP  
AFRXUP-S


Technical Data	
Power supply	24 to 240 VAC -20% / +10%, 50/60 Hz 24 to 125 VDC $\pm$ 10%
Power consumption	running 7 W holding 3.5 W
Transformer sizing	7 VA @ 24 VAC (class 2 power source) 8.5 VA @ 120 VAC 18 VA @ 240 VAC
Electrical connection	
AFRBUP...	3 ft., 18 GA appliance cable, 1/2" conduit connector <b>-S models:</b> two 3 ft., 18 gauge appliance cables with 1/2" conduit connectors
AFRXUP...	3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] 18 GA appliance or plenum cables, with or without 1/2" conduit connector <b>-S models:</b> two 3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] appliance cables, with or without 1/2" conduit connectors
Overload protection	electronic throughout 0 to 95° rotation
Control	on/off
Direction of rotation	spring reversible with CW/CCW mounting
Angle of rotation	95° (adjustable with mechanical end stop, 35° to 95°)
Running time	motor < 75 seconds spring 20 seconds @ -4°F to 122°F [-20°C to 50°C]; < 60 seconds @ -22°F [-30°C]
Position indication	visual indicator, 0° to 95° (0° is full spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54, Enclosure Type2
Agency listings †	cULus according to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC & 2006/95/EC
Noise level	<50dB(A) motor @ 75 seconds <62dB(A) spring return
Quality standard	ISO 9001

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

## AFRBUP-S, AFRXUP-S


Auxiliary switches	2 x SPDT 3A (0.5A) @ 250 VAC, UL approved one set at +10°, one adjustable 10° to 90°
--------------------	--

## Dimensions

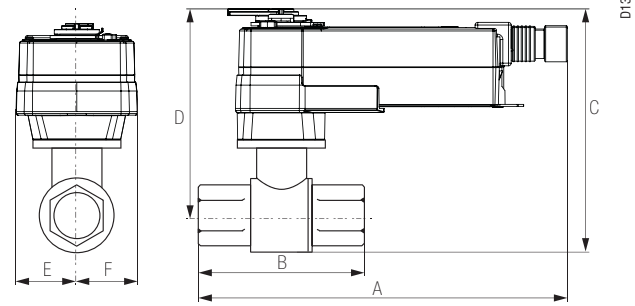

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B212-B216	1/2"	15	2.38" [60.4]	1.72" [43.7]
B217-B221	3/4"	20	2.73" [69.3]	1.81" [45.9]
B222-B225	1"	25	3.09" [78.4]	1.81" [45.9]
B229-B230	1 1/4"	32	3.72" [94.6]	1.81" [45.9]
B231-B232	1 1/4"	32	3.72" [94.6]	1.98" [50.4]
B238-B240	1 1/2"	40	3.88" [98.5]	1.98" [50.4]
B248-B250	2"	50	4.21" [107.0]	2.21" [56.2]
B251-B254	2"	50	4.93" [125.2]	2.68" [68.0]
B261-B265	2 1/2"	65	5.55" [140.9]	2.68" [68.0]
B277-B280	3"	80	5.82" [147.9]	2.68" [68.0]

## Dimensions

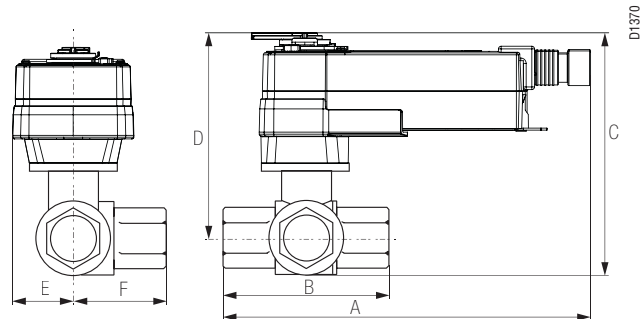

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B312-B316	1/2"	15	2.38" [60.4]	1.72" [43.7]	1.26" [32.1]
B317-B321	3/4"	20	2.73" [69.3]	1.81" [45.9]	1.45" [36.8]
B322-B325	1"	25	3.09" [78.4]	1.81" [45.9]	1.56" [39.8]
B329-B331	1 1/4"	32	3.96" [100.6]	2.21" [56.2]	2.14" [54.3]
B338-B341	1 1/2"	40	4.39" [111.6]	2.45" [62.2]	2.33" [59.1]
B347-B352	2"	50	4.90" [124.5]	2.68" [68.0]	2.60" [66.0]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.



### Wiring Diagrams


#### ✂️ INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 No ground connection is required.
- 4 For end position indication, interlock control, fan startup, etc.,  
AFRBUP-S and AFRXUP-S incorporates two built-in auxiliary switches:  
2 x SPDT, 3A (0.5A) @250 VAC, UL Approved, one switch is fixed at  
+10°, one is adjustable 10° to 90°.

#### 📄 APPLICATION NOTES

- ◆ Meets cULus requirements without the need of an electrical ground connection.

**⚠️ WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

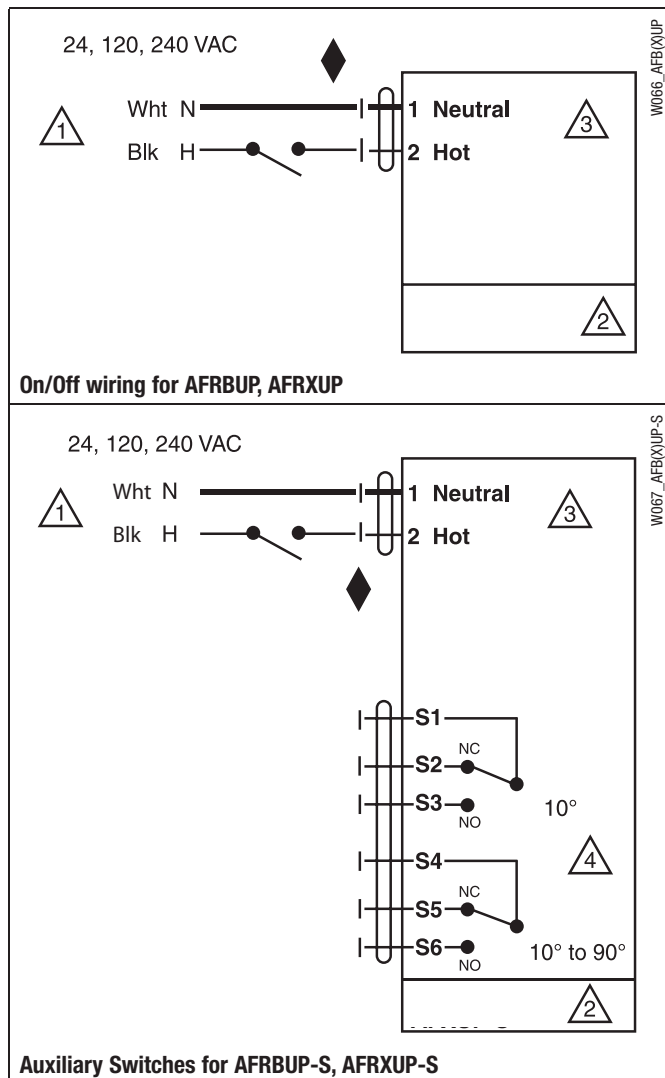

# AFRB24-SR, AFRX24-SR


Proportional, Spring Return, 24 V, for 2 to 10 VDC or 4 to 20 mA Control Signal



Technical Data	
Power supply	24 VAC $\pm$ 20%, 50/60 Hz 24 VDC +20% / -10%
Power consumption	running 5.5 W holding 3 W
Transformer sizing	8.5 VA (class 2 power source)
Electrical connection	
AFRB...	3 ft, 18 GA appliance cable, 1/2" conduit connector <b>-S models:</b> two 3 ft, 18 gauge appliance cables with 1/2" conduit connectors
AFX...	3 ft [1m], 10 ft [3m] or 16 ft [5m] 18 GA appliance or plenum cables, with or without 1/2" conduit connector <b>-S models:</b> Two 3 ft [1m], 10 ft [3m] or 16 ft [5m] appliance cables, with or without 1/2" conduit connectors
Overload protection	electronic throughout 0 to 95° rotation
Operating range Y	2 to 10 VDC, 4 to 20mA
Input impedance	100 k $\Omega$ for 2 to 10 VDC (0.1 mA) 500 $\Omega$ for 4 to 20 mA
Feedback output U	2 to 10 VDC (max. 0.5 mA)
Direction of rotation	spring reversible with CW/CCW mounting motor reversible with built-in switch
Mechanical angle of rotation	95° (adjustable with mechanical end stop, 35° to 95°)
Running time	spring < 20 seconds @ -4°F to 122°F [-20°C to 50°C]; < 60 seconds @ -22°F [-30°C] motor 95 seconds
Position indication	visual indicator, 0° to 95° (0° is full spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Humidity	max. 95% RH non-condensing
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	Nema 2, IP54, Enclosure Type2
Housing material	zinc coated metal and plastic casing
Agency listings†	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC & 2006/95/EC
Noise level	$\leq$ 40dB(A) motor @ 95 seconds $\leq$ 62dB(A) spring return
Servicing	maintenance free
Quality standard	ISO 9001
Weight	4.6 lbs (2.1 kg); 4.9 lbs (2.25 kg) with switches


† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

## Dimensions

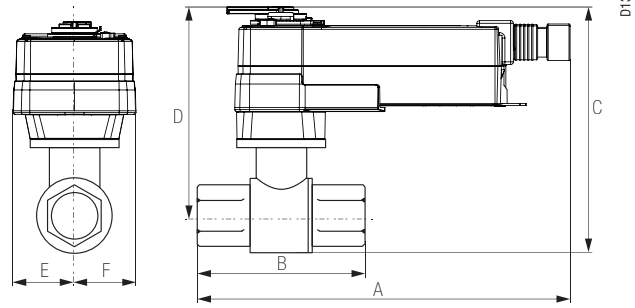

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B212-B216	1/2"	15	2.38" [60.4]	1.72" [43.7]
B217-B221	3/4"	20	2.73" [69.3]	1.81" [45.9]
B222-B225	1"	25	3.09" [78.4]	1.81" [45.9]
B229-B230	1 1/4"	32	3.72" [94.6]	1.81" [45.9]
B231-B232	1 1/4"	32	3.72" [94.6]	1.98" [50.4]
B238-B240	1 1/2"	40	3.88" [98.5]	1.98" [50.4]
B248-B250	2"	50	4.21" [107.0]	2.21" [56.2]
B251-B254	2"	50	4.93" [125.2]	2.68" [68.0]
B261-B265	2 1/2"	65	5.55" [140.9]	2.68" [68.0]
B277-B280	3"	80	5.82" [147.9]	2.68" [68.0]

## Dimensions

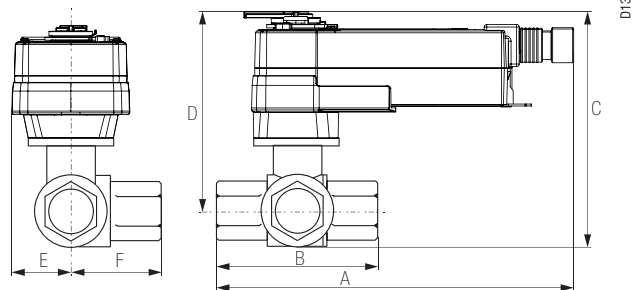

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B312-B316	1/2"	15	2.38" [60.4]	1.72" [43.7]	1.26" [32.1]
B317-B321	3/4"	20	2.73" [69.3]	1.81" [45.9]	1.45" [36.8]
B322-B325	1"	25	3.09" [78.4]	1.81" [45.9]	1.56" [39.8]
B329-B331	1 1/4"	32	3.96" [100.6]	2.21" [56.2]	2.14" [54.3]
B338-B341	1 1/2"	40	4.39" [111.6]	2.45" [62.2]	2.33" [59.1]
B347-B352	2"	50	4.90" [124.5]	2.68" [68.0]	2.60" [66.0]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

#### Accessories

AV 8-25	Shaft extension
IND-AFB	Damper position indicator
KH-AFB	Crank arm
K7-2	Universal clamp for up to 1.05" dia jackshafts
TF-CC US	Conduit fitting
Tool-06	8mm and 10 mm wrench
ZG-100	Universal mounting bracket
ZG-101	Universal mounting bracket
ZG-118	Mounting bracket for Barber Colman® MA 3../4..., Honeywell® Mod III or IV or Johnson® Series 100 replacement or new crank arm type installations
ZG-AFB	Crank arm adaptor kit
ZG-AFB118	Crank arm adaptor kit
ZS-100	Weather shield (metal)
ZS-150	Weather shield (polycarbonate)
ZS-260	Explosion-proof housing
ZS-300	NEMA 4X housing

**NOTE:** When using AFRB24-SR, AFRB24-SR-S, AFRX24-SR and AFRX24-SR-S actuators, only use accessories listed on this page.

For actuator wiring information and diagrams, refer to Belimo Wiring Guide.

#### Typical Specification

Spring return control damper actuators shall be direct coupled type which require no crank arm and linkage and be capable of direct mounting to a jackshaft up to a 1.05" diameter. The actuator must provide proportional damper control in response to a 2 to 10 VDC or, with the addition of a 500Ω resistor, a 4 to 20 mA control input from an electronic controller or positioner. The actuators must be designed so that they may be used for either clockwise or counterclockwise fail-safe operation. Actuators shall use a brushless DC motor controlled by a microprocessor and be protected from overload at all angles of rotation. Run time shall be constant, and independent of torque. A 2 to 10 VDC feedback signal shall be provided for position feedback. Actuators shall be cULus Approved and have a 5 year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

#### Wiring Diagrams

##### INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel. Power consumption and input impedance must be observed.  
Up to 4 actuators may be connected in parallel if not mechanically mounted to the same shaft. With 4 actuators wired to one 500 Ω resistor. Power consumption must be observed.
- 3 Actuator may also be powered by 24 VDC.
- 4 For end position indication, interlock control, fan startup, etc., AFB24-SR-S and AFX24-SR-S incorporates two built-in auxiliary switches: 2 x SPDT, 3A (0.5A) @250 VAC, UL Approved, one switch is fixed at +10°, one is adjustable 10° to 90°.
- 5 Only connect common to neg. (-) leg of control circuits


##### APPLICATION NOTES

- ◆ The ZG-R01 500 Ω resistor converts the 4 to 20 mA control signal to 2 to 10 VDC.


**ATTENTION:** AFRB24-SR(-S) and AFRX24-SR(-S) **cannot** be tandem mounted on the same damper or valve shaft. Only On/Off and MFT AF models can be used for tandem mount applications.

#### WARNING Live Electrical Components!


During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

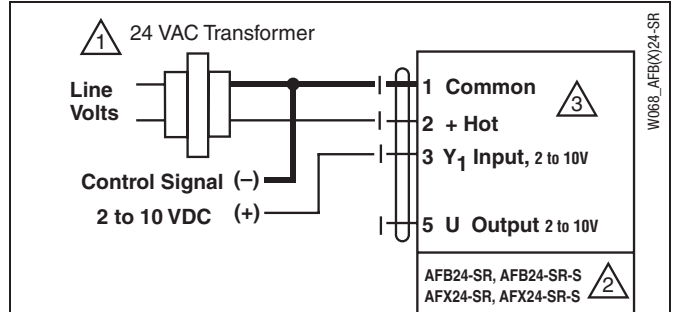


2 to 10 VDC control of AFRB24-SR and AFRX24-SR

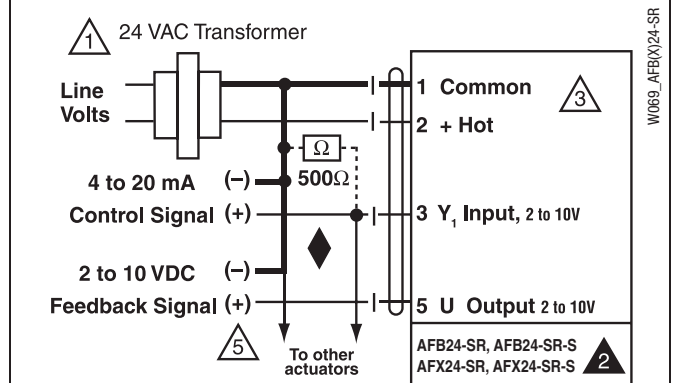

4 to 20 mA control of AFRB24-SR and AFRX24-SR with 2 to 10 VDC feedback output

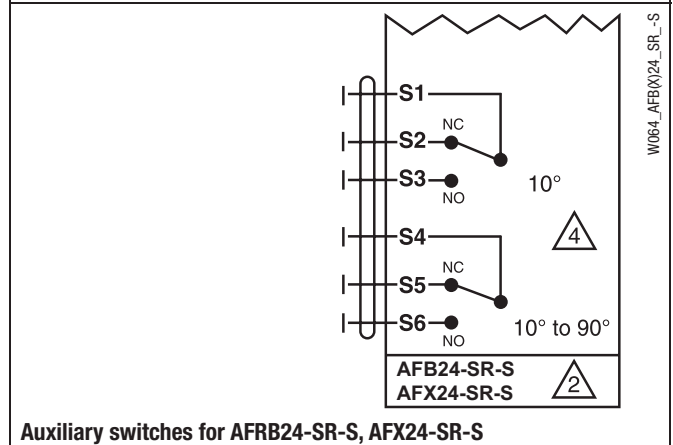

Auxiliary switches for AFRB24-SR-S, AFX24-SR-S

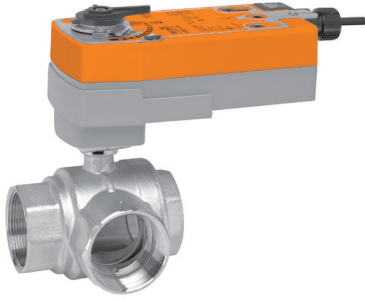

**MFT**



## Models

AFRX24-MFT  
AFRX24-MFT-S

Technical Data	
Control	MFT
Control signal	2 to 10 VDC, 4 to 20 mA (default) variable (VDC, PWM, floating point, on/off)
Power supply	24 VAC, +/- 20%, 50/60 Hz 24 VDC, +20% / -10%
Power consumption†	running 7.5 W holding 3 W
Transformer sizing†	10 VA (Class 2 power source)
Electrical connection	3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] 18 GA appliance or plenum cables, with or without 1/2" conduit connector -S models: two 3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] appliance cables with or without 1/2" conduit connectors
Overload protection	electronic throughout 0 to 90° rotation
Feedback output*	2 to 10 VDC, 0.5 mA max (variable)
Input impedance	100 kΩ for 2 to 10 VDC (0.1 mA) 500 Ω for 4 to 20 mA 1500 Ω for on/off and floating point
Angle of rotation	95°
Direction of rotation*	spring reversible with CW/CCW mounting motor reversible with built-in ↻/↻ switch
Position indication	visual indicator 0° to 95° (0° is spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Running time	motor* 150 seconds (default), variable (70 to 220 seconds) spring <20 sec @ -4°F to 122°F [-20°C to 50°C] -22° F to 122° F [-30° C to 50° C]
Ambient temperature	
Housing	NEMA 2, IP54, Enclosure Type 2
Agency listings	cULus according. To UL60730-1A/-2-14, CAN/CSA E60730- 1:02, CE according. To 2004/108/EC & 2006/95/EC
Noise level	≤40dB(A) motor @ 150 seconds, run time dependent ≤62dB(A) spring return
Quality standard	ISO 9001

† Programmed for 70 sec motor runtime. At 150 sec motor run time, transformer sizing is 8.5 VA and power consumption is 6 W running/3 W holding.


\* Variable when configured with MFT options

‡ Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

## AFRX24-MFT-S


Auxiliary switches	2 x SPDT 3A (0.5A) @ 250 VAC, UL approved one set at +10° to 90°
--------------------	--

## Dimensions

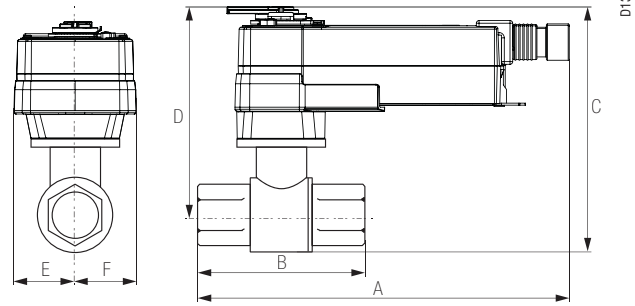


Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B212-B216	½"	15	2.38" [60.4]	1.72" [43.7]
B217-B221	¾"	20	2.73" [69.3]	1.81" [45.9]
B222-B225	1"	25	3.09" [78.4]	1.81" [45.9]
B229-B230	1¼"	32	3.72" [94.6]	1.81" [45.9]
B231-B232	1¼"	32	3.72" [94.6]	1.98" [50.4]
B238-B240	1½"	40	3.88" [98.5]	1.98" [50.4]
B248-B250	2"	50	4.21" [107.0]	2.21" [56.2]
B251-B254	2"	50	4.93" [125.2]	2.68" [68.0]
B261-B265	2½"	65	5.55" [140.9]	2.68" [68.0]
B277-B280	3"	80	5.82" [147.9]	2.68" [68.0]

## Dimensions

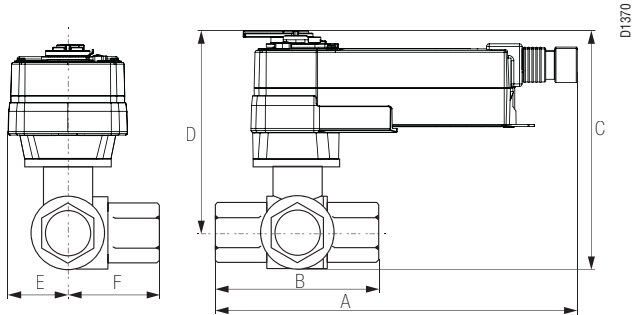

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B312-B316	½"	15	2.38" [60.4]	1.72" [43.7]	1.26" [32.1]
B317-B321	¾"	20	2.73" [69.3]	1.81" [45.9]	1.45" [36.8]
B322-B325	1"	25	3.09" [78.4]	1.81" [45.9]	1.56" [39.8]
B329-B331	1¼"	32	3.96" [100.6]	2.21" [56.2]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.45" [62.2]	2.33" [59.1]
B347-B352	2"	50	4.90" [124.5]	2.68" [68.0]	2.60" [66.0]

### Dimensions

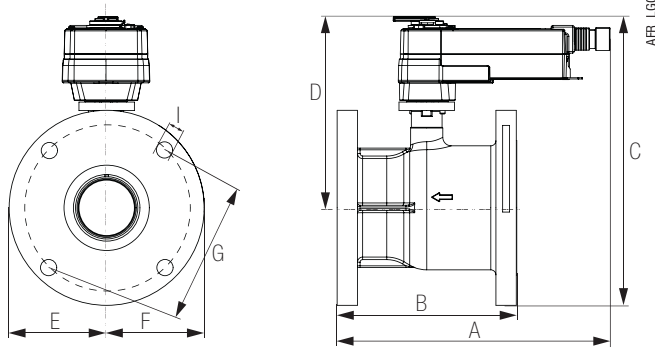

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter	Face-to-Face Length	Height
			A	B	C
B6250	2½" [65]	F05	7.50" [190.5]	5.50" [139.7]	8.10" [205.4]
B6300	3" [80]		8.00" [203.2]	6.60" [167.6]	8.40" [213.1]
B6400	4" [100]		9.00" [228.6]	8.30" [210.8]	9.30" [235.9]

### Wiring Diagrams

#### INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel if not mechanically mounted to the same shaft. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 Position feedback cannot be used with Triac sink controller. The actuator internal common reference is not compatible.
- 5 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.
- 8 Contact closures A & B also can be triacs.
- 8 A & B should both be closed for triac source and open for triac sink.
- 9 For triac sink the common connection from the actuator must be connected to the hot connection of the controller.


#### APPLICATION NOTES

- ◆ Meets UL requirements without the need of an electrical ground connection.
- ◆ The ZG-R01 500 Ω resistor may be used.


#### WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.


P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

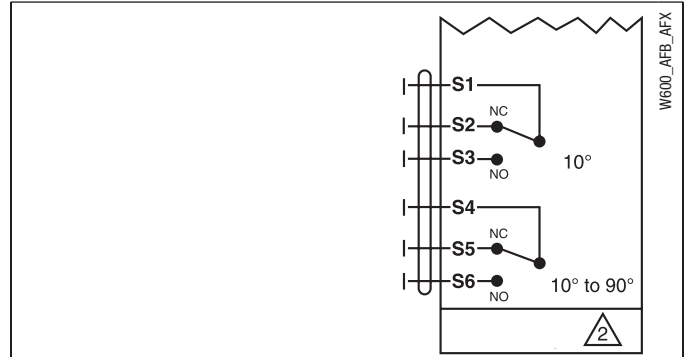


Auxiliary Switches for AFRX24-MFT

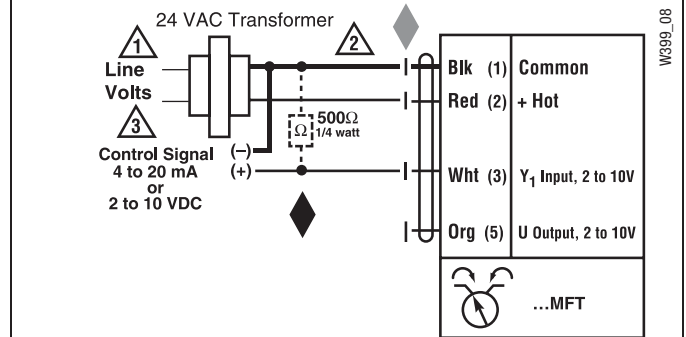


VDC/4-20 mA

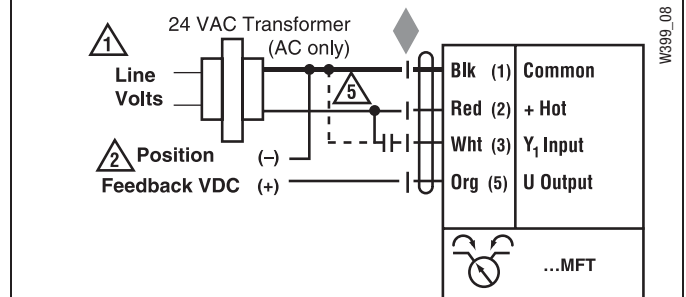

PWM

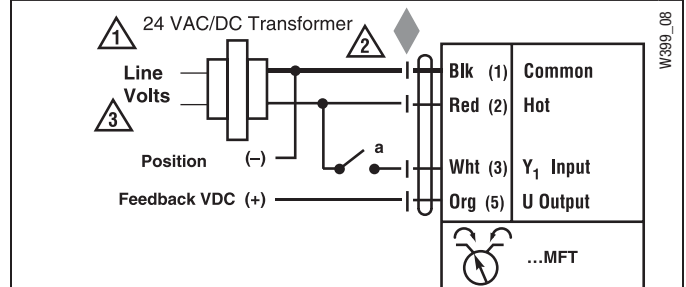


On/Off control

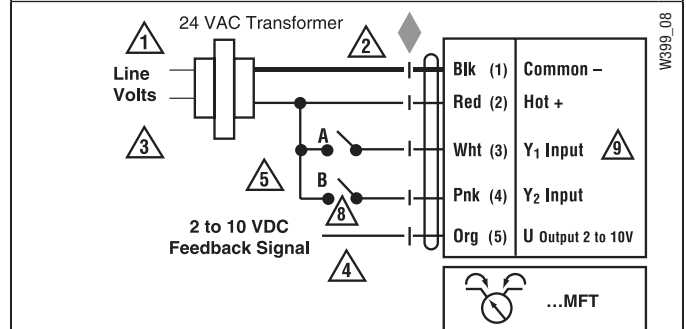

Floating Point control

# AFRX24-MFT95 Actuator, Proportional Potentiometric Control

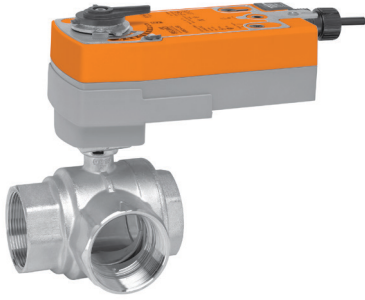

MFT



## Models

AFRX24-MFT95


Technical Data	
Control	MFT
Control signal	0 to 135 Ω Honeywell Electronic Series 90, 0 to 135 Ω input
Power supply	24 VAC, +/- 20%, 50/60 Hz 24 VDC, +20% / -10%
Power consumption†	running 7.5 W holding 3 W
Transformer sizing†	10 VA (Class 2 power source)
Electrical connection	3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] 18 GA plenum cables, with or without 1/2" conduit connector
Overload protection	electronic throughout 0 to 90° rotation
Feedback output*	2 to 10 VDC, 0.5 mA max (variable)
Angle of rotation	95°
Direction of rotation*	spring reversible with CW/CCW mounting motor reversible with built-in  switch
Position indication	visual indicator 0° to 95° (0° is spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Running time	motor* 150 seconds (default), variable (70 to 220 seconds) spring <20 sec @ -4°F to 122°F [-20°C to 50°C]
Ambient temperature	-22° F to 122° F [-30° C to 50° C]
Housing	NEMA 2, IP54, Enclosure Type 2
Agency listings	cULus according. To UL60730-1A/-2-14, CAN/CSA E60730- 1:02, CE according. To 2004/108/EC & 2006/95/EC
Noise level	≤40dB(A) motor @ 150 seconds, run time dependent ≤62dB(A) spring return
Quality standard	ISO 9001

† Programmed for 70 sec motor runtime. At 150 sec motor run time, transformer sizing is 8.5 VA and power consumption is 6 W running/3 W holding.

\* Variable when configured with MFT options


‡ Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

## Dimensions

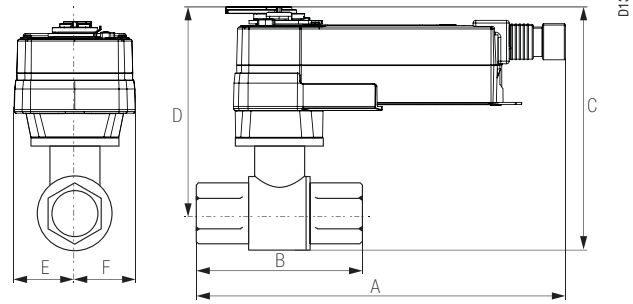

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B212-B215	½"	15	2.38" [60.4]	1.72" [43.7]
B217-B221	¾"	20	2.73" [69.3]	1.81" [45.9]
B222-B225	1"	25	3.09" [78.4]	1.81" [45.9]
B229-B230	1¼"	32	3.72" [94.6]	1.81" [45.9]
B231-B232	1¼"	32	3.72" [94.6]	1.98" [50.4]
B238-B240	1½"	40	3.88" [98.5]	1.98" [50.4]
B248-B250	2"	50	4.21" [107.0]	2.21" [56.2]
B251-B254	2"	50	4.93" [125.2]	2.68" [68.0]
B261-B265	2½"	65	5.55" [140.9]	2.68" [68.0]
B277-B280	3"	80	5.82" [147.9]	2.68" [68.0]


## Dimensions

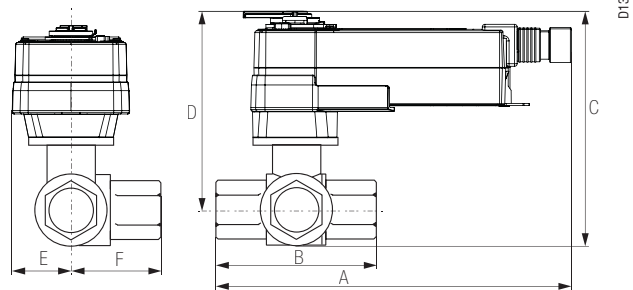

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B312-B315	½"	15	2.38" [60.4]	1.72" [43.7]	1.26" [32.1]
B317-B321	¾"	20	2.73" [69.3]	1.81" [45.9]	1.45" [36.8]
B322-B325	1"	25	3.09" [78.4]	1.81" [45.9]	1.56" [39.8]
B329-B331	1¼"	32	3.96" [100.6]	2.21" [56.2]	2.14" [54.3]
B338-B341	1½"	40	4.39" [111.6]	2.45" [62.2]	2.33" [59.1]
B347-B352	2"	50	4.90" [124.5]	2.68" [68.0]	2.60" [66.0]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

### Dimensions

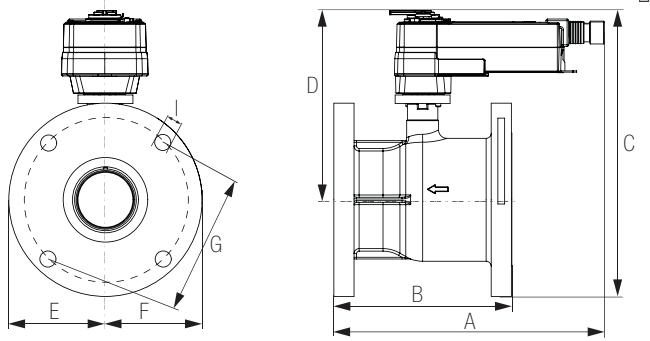

Valve Body	Nominal Pipe Size	Top Flange Design	Dimensions		
			Flange Diameter	Face-to-Face Length	Height
			A	B	C
B6250	2½" [65]	F05	7.50" [190.5]	5.50" [139.7]	8.10" [205.4]
B6300	3" [80]		8.00" [203.2]	6.60" [167.6]	8.40" [213.1]
B6400	4" [100]		9.00" [228.6]	8.30" [210.8]	9.30" [235.9]

### Wiring Diagrams

#### INSTALLATION NOTES


- 1 Provide overload protection and disconnect as required.
- 2 Actuators and controller must have separate transformers.
- 3 Consult controller instruction data for more detailed installation information.
- 4 To reverse control rotation, use the reversing switch.
- 5 Resistor value depends on the type of controller and the number of actuators. No resistor is used for one actuator. Honeywell resistor kits may also be used.

**WARNING Live Electrical Components!**  
 During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.


P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

Switch A	Switch B	Damper Position
		Damper Open
		Damper Closed


The direction of rotation switch is set so that the fail safe position and the position of the damper is closed with no signal at wire R.

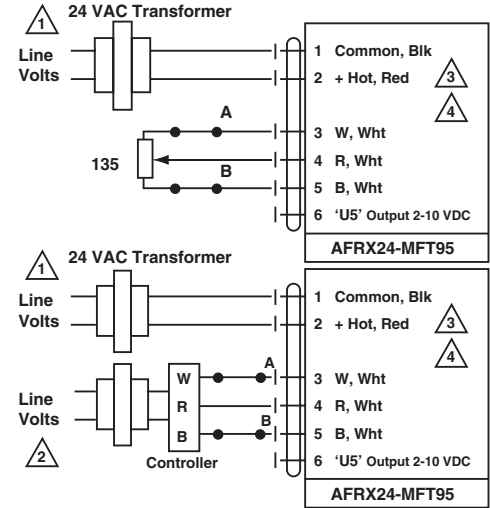


### Override of AFRX24-MFT95

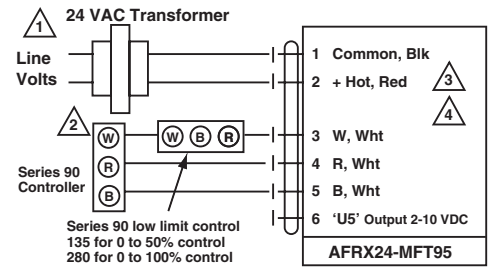


Series 90 low limit control  
 135 for 0 to 50% control  
 280 for 0 to 100% control

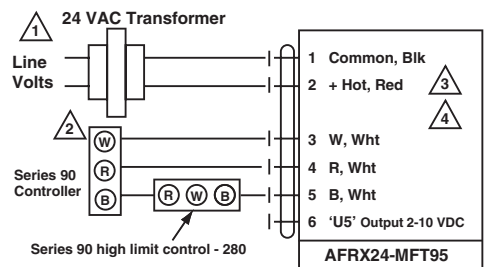



AFRX24-MFT95 used with a Series 90 controller and a Series 90 low limit control

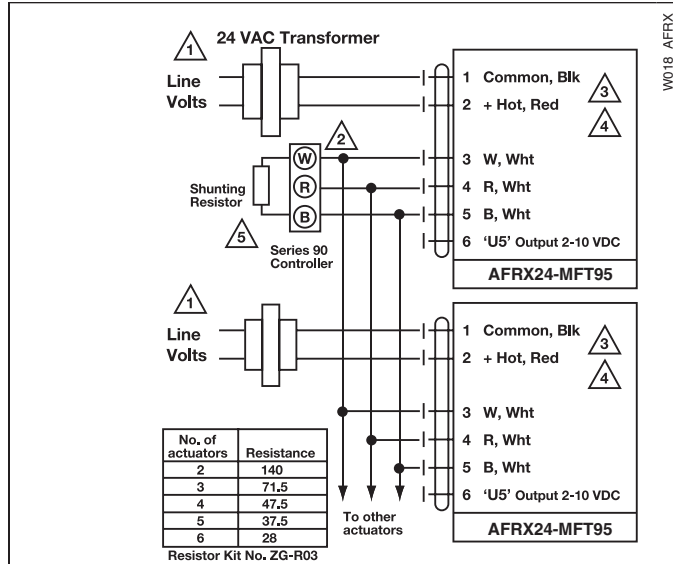

Wiring multiple actuators to a Series 90 controller.

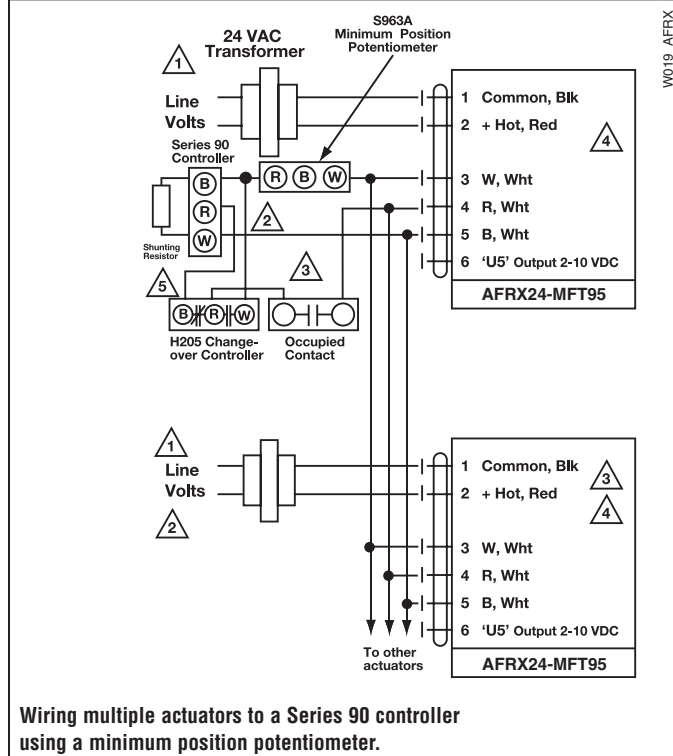

Wiring multiple actuators to a Series 90 controller using a minimum position potentiometer.

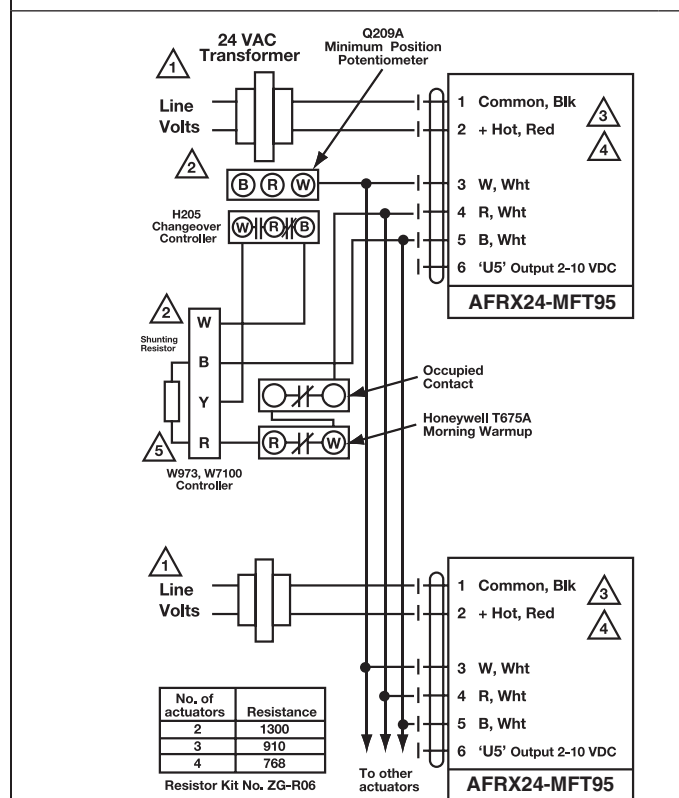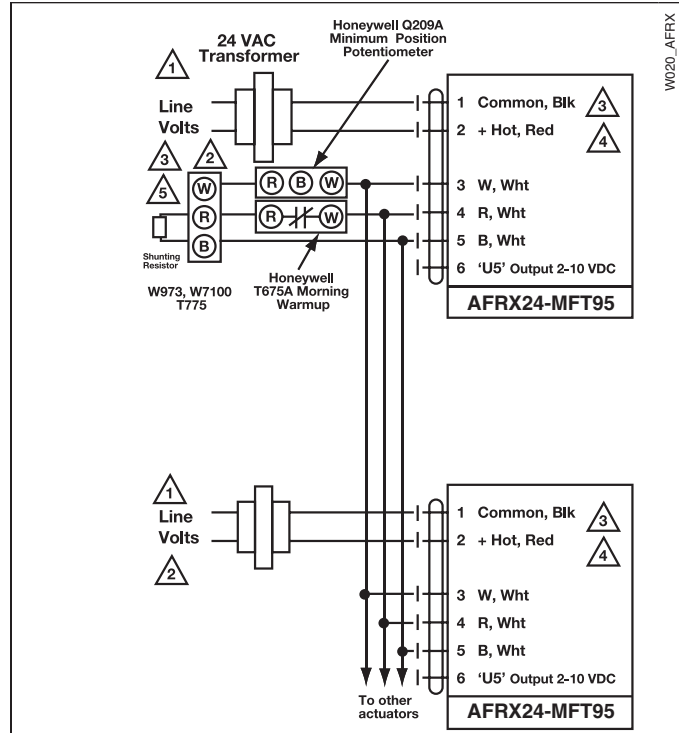

Typical wiring diagrams for multiple actuators used with the W973, W7100 and T775 controllers.

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.





### Models

AFRB24 N4	Basic Version
AFRB24 N4H	Basic Version w/built in heater
AFRB24-S N4	Basic Version w/built-in aux. switch
AFRB24-S N4H	Basic Version w/built-in aux. switch & heater
AFRX24 N4	Flexible Version
AFRX24-S N4	Flexible Version w/built-in aux. switch
AFRX24 N4H	Flexible Version w/built in heater
AFRX24-S N4H	Flexible Version aux. switch & heater

### Technical Data


Power supply	24 VAC ± 20% 50/60 Hz 24 VDC +20% / -10%
Power consumption	running 5 W / heater 25 W holding 2.5 W
Transformer sizing	7.5 VA (class 2 power source) / heater 25 VA
Electrical connection	3 ft [1m], 10 ft [3m] or 16 ft [5m] 18 GA appliance cable, with or without 1/2" conduit connector -S models: Two 3 ft [1m], 10 ft [3m] or 16 ft [5m] appliance cables with or without 1/2" conduit connectors
	heater (N4H) terminal block, 26-16 GA
Overload protection	electronic throughout 0 to 95° rotation
Control	on/off
Torque	180 in-lb [20 Nm] minimum
Direction of rotation	spring reversible with CW/CCW mounting in housing
Mechanical angle of rotation	95° (adjustable with mechanical end stop, 35° to 95°)
Running time	motor < 75 seconds spring 20 seconds @ -4°F to 122°F [-20°C to 50°C]; < 60 seconds @ -22°F [-30°C] spring (with heater) 20 seconds @ -4°F to 122°F [-20°C to 50°C], < 60 seconds @ -49°F [-45°C]
Position indication	visual indicator, 0° to 95° (0° is full spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Humidity	max. 95% RH non-condensing
Ambient temperature	-22°F to 122°F [-30°C to 50°C] with heater -49°F to 122°F [-45°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	UL Type 4, NEMA 4, IP66
Housing material	polycarbonate
Agency listings †	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC & 2006/95/CE
Noise level	<50dB(A) motor @ 75 seconds <62dB(A) spring return
Servicing	maintenance free
Quality standard	ISO 9001
Weight	9.7 lbs (4.4 kg); 10 lbs (4.5 kg) with switches; 10.5 lbs (4.8 kg) with heater

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 4.

### AFRB24-S N4, AFRB24-S N4H, AFRX24-S N4, AFRX24-S N4H


Auxiliary switches	2 x SPDT 3A (0.5A) @ 250 VAC, UL approved one set at +10°, one adjustable 10° to 90°
--------------------	---

### Dimensions with 2-Way Valve

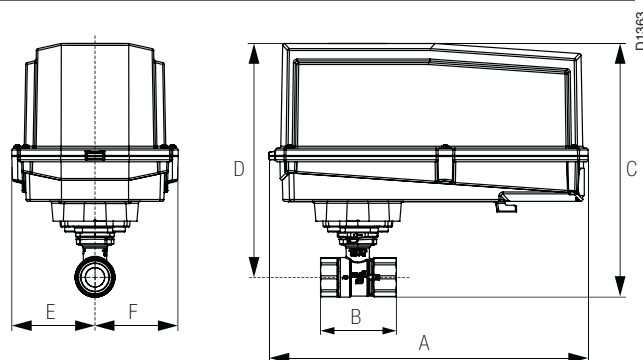

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1 1/4"	32	3.72" [94.6]	1.84" [47.4]
B238-B240	1 1/2"	40	3.88" [98.5]	2.04" [51.9]
B248-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]

### Dimensions with 3-Way Valve

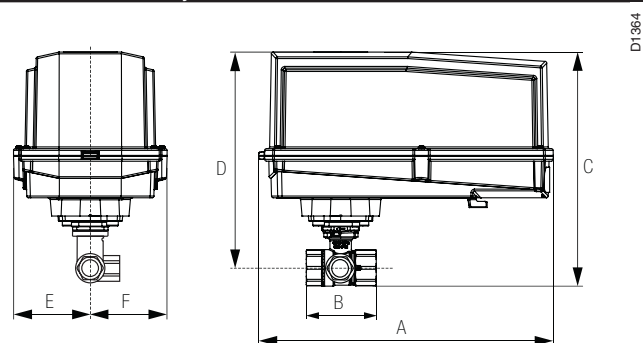

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B332	1 1/4"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1 1/2"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

# AFRB24 N4, AFRB24 N4H, AFRB24-S N4, AFRB24-S N4H, AFRX24 N4, AFRX24 N4H, AFRX24-S N4, AFRX24-S N4H



NEMA 4, On/Off, Spring Return, 24 V

## Accessories

Tool-06	8mm and 10 mm wrench
43442-00001	Gland (needed for additional wires)
11097-00001	Gasket for Gland (needed for additional wires)

**NOTE:** When using AFRB24 N4, AFRB24 N4H, AFRB24-S N4, AFRB24-S N4H, AFRX24 N4, AFRX24 N4H, AFRX24-S N4, AFRX24-S N4H actuators, only use accessories listed on this page. For actuator wiring information and diagrams, refer to Belimo Wiring Guide.

## Typical Specification

The actuators must be designed so that they may be used for either clockwise or counterclockwise fail-safe operation. Actuators shall be protected from overload at all angles of rotation. If required, two SPDT auxiliary switch shall be provided having the capability of one being adjustable. Actuators with auxiliary switches must be constructed to meet the requirements for Double Insulation so an electrical ground is not required to meet agency listings. Actuators shall be cULus Approved and have a 5 year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

## Wiring Diagrams

### ✂ INSTALLATION NOTES


- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 For end position indication, interlock control, fan startup, etc., AFRB24-S N4, AFRB24-S N4H, AFRX24-S N4, AFRX24-S N4H incorporates two built-in auxiliary switches: 2 x SPDT, 3A (0.5A) @250 VAC, UL Approved, one switch is fixed at +10°, one is adjustable 10° to 90°.

### 📄 APPLICATION NOTES

- ◆ Meets cULus requirements without the need of an electrical ground connection.

### ⚠ WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

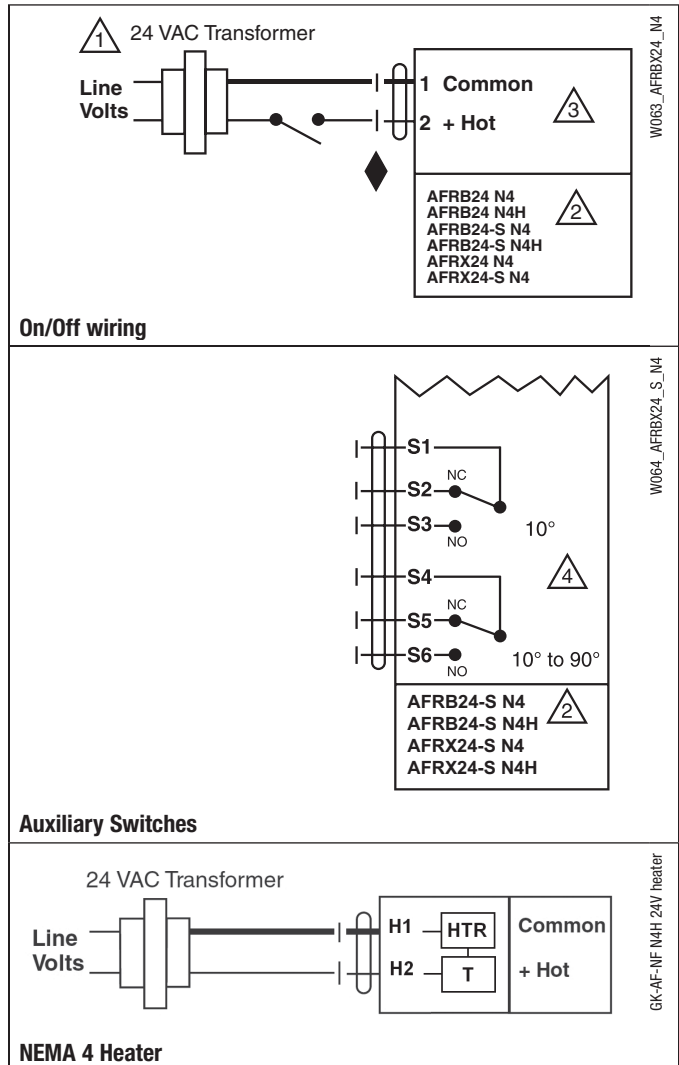

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.



## Models

AFRBUP N4	Basic Version
AFRBUP-S N4	Basic Version w/built-in aux. switch
AFRBUP N4H	Basic Version w/built in heater
AFRBUP-S N4H	Basic Version w/built-in aux. switch & heater
AFRXUP N4	Flexible Version
AFRXUP-S N4	Flexible Version w/built-in aux. switch
AFRXUP N4H	Flexible Version w/built in heater
AFRXUP-S N4H	Flexible Version w/built-in aux. switch & heater

## Technical Data


Power supply	24...240 VAC -20% / +10%, 50/60 Hz 24...125 VDC ±10%
Power consumption	running 7 W / heater 25 W holding 3.5 W
Transformer sizing	7 VA @ 24 VAC (class 2 power source) 8.5 VA @ 120 VAC / heater 25 VA @120 VAC 18 VA @ 240 VAC
Electrical connection	AFRBUP... N4 3 ft [1m], 10 ft [3m] or 16 ft [5m] 18 GA appliance cable, with or without 1/2" conduit connector AFRXUP... N4 <b>-S models:</b> Two 3 ft [1m], 10 ft [3m] or 16 ft [5m] appliance cables with or without 1/2" conduit connectors heater (N4H) terminal block, 18-16 GA
Overload protection	electronic throughout 0 to 95° rotation
Control	on/off
Torque	180 in-lb [20 Nm] minimum
Direction of rotation	spring reversible with CW/CCW mounting inside housing
Mechanical angle of rotation	95° (adjustable with mechanical end stop, 35° to 95°)
Running time	motor < 75 sec spring 20 sec @ -4°F to 122°F [-20°C to 50°C]; < 60 sec @ -22°F [-30°C] spring (with heater) 20 sec @ -4°F to 122°F [-20°C to 50°C]; < 60 sec @ -49°F [-45°C]
Position indication	visual indicator, 0° to 95° (0° is full spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Humidity	max. 95% RH non-condensing
Ambient temperature	-22°F to 122°F [-30°C to 50°C] with heater -49°F to 122°F [-45°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	UL Type 4, NEMA 4, IP66
Housing material	polycarbonate
Agency listings †	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC & 2006/95/EC
Noise level	<50dB(A) motor @ 75 seconds <62dB(A) spring return
Servicing	maintenance free
Quality standard	ISO 9001
Weight	9.7 lbs (4.4 kg), 10 lbs (4.5 kg) with switches 10.5 lbs (4.8 kg) with heater

† Rated Impulse Voltage 4kV, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 4.

## AFRBUP-S N4, AFRBUP-S N4H, AFRXUP-S N4, AFRXUP-S N4H


Auxiliary switches	2 x SPDT 3A (0.5A) @ 250 VAC, UL Approved one set at +10°, one adjustable 10° to 90°
--------------------	---

## Dimensions with 2-Way Valve

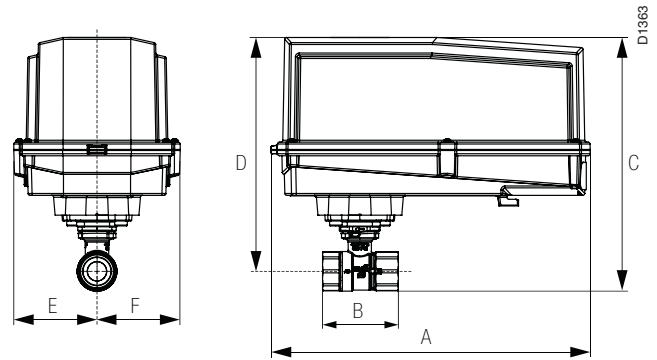

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1 1/4"	32	3.72" [94.6]	1.84" [47.4]
B238-B240	1 1/2"	40	3.88" [98.5]	2.04" [51.9]
B248-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B261-B265	2 1/2"	65	5.55" [140.9]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]

## Dimensions with 3-Way Valve

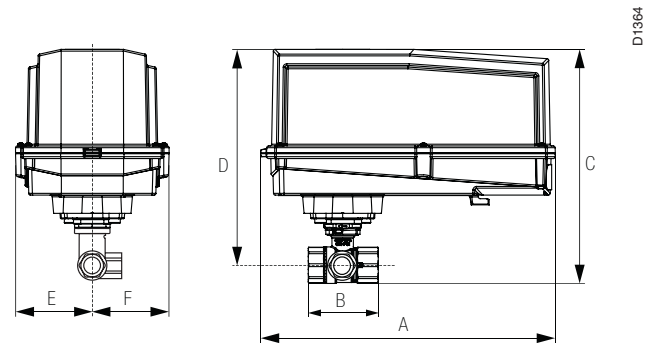

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1 1/4"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1 1/2"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

# AFRBUP N4, AFRBUP-S N4, AFRBUP N4H, AFRBUP-S N4H, AFRXUP N4, AFRXUP-S N4, AFRXUP N4H, AFRXUP-S N4H



NEMA 4, On/Off, Spring Return, 24 to 240 VAC

## Accessories

Tool-06	8mm and 10 mm wrench
43442-00001	Gland (needed for additional wires)
11097-00001	Gasket for Gland (needed for additional wires)

**NOTE:** When using AFRBUP N4, AFRBUP-S N4, AFRBUP N4H, AFRBUP-S N4H, AFRXUP N4, AFRXUP-S N4, AFRXUP N4H, AFRXUP-S N4H actuators, only use accessories listed on this page. For actuator wiring information and diagrams, refer to Belimo Wiring Guide.

## Typical Specification

On/Off spring return damper actuators shall be direct coupled type which require no crank arm and linkage and be capable of direct mounting to a jackshaft up to a 1.05" diameter. The actuators must be designed so that they may be used for either clockwise or counterclockwise fail-safe operation. Actuators shall be protected from overload at all angles of rotation. If required, two SPDT auxiliary switch shall be provided having the capability of one being adjustable. Actuators with auxiliary switches must be constructed to meet the requirements for Double Insulation so an electrical ground is not required to meet agency listings. Actuators shall be cULus Approved and have a 5 year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

## Wiring Diagrams


### INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 For end position indication, interlock control, fan startup, etc., AFRB24-S N4, AFRB24-S N4H, AFRX24-S N4, AFRX24-S N4H incorporates two built-in auxiliary switches: 2 x SPDT, 3A (0.5A) @250 VAC, UL Approved, one switch is fixed at +10°, one is adjustable 10° to 90°.


### APPLICATION NOTES

- Meets cULus requirements without the need of an electrical ground connection.


**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

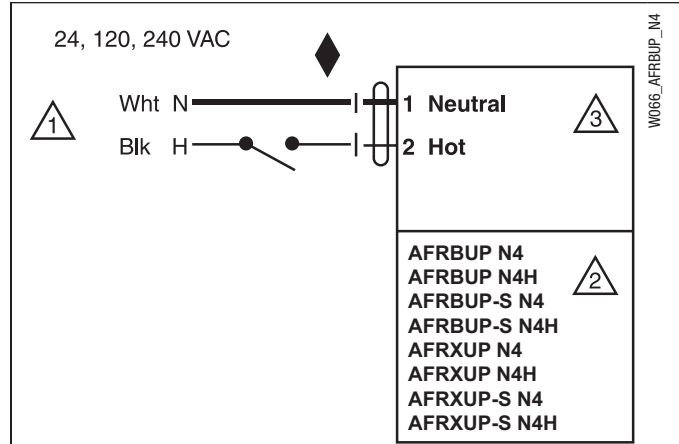

### On/Off Wiring

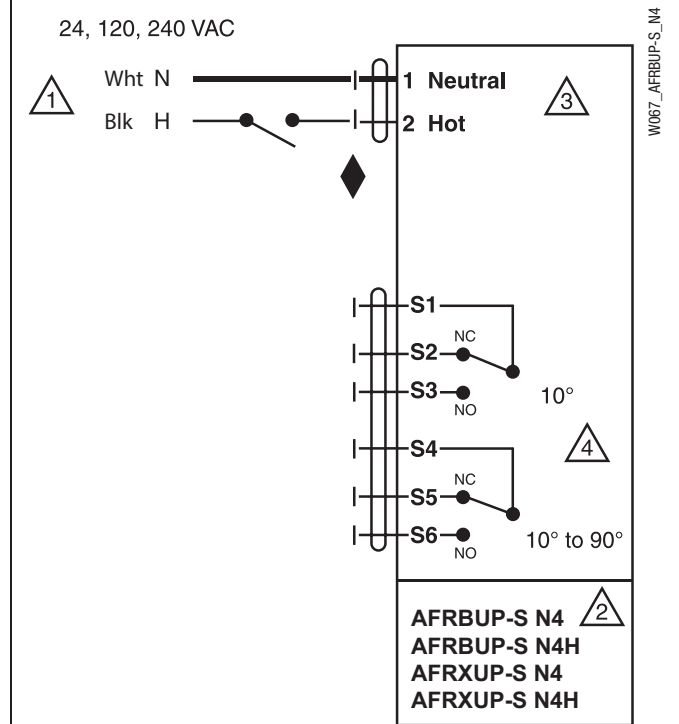

### Auxiliary Switches

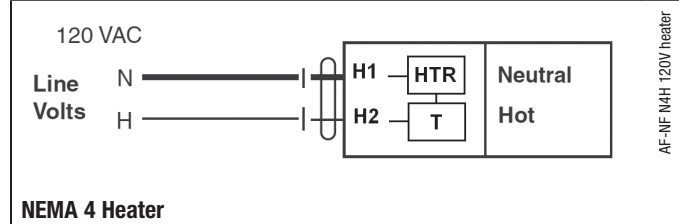

### NEMA 4 Heater

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.



**Models**

AFRB24-MFT N4	Basic Version
AFRB24-MFT-S N4	Basic Version w/built-in aux. switch
AFRB24-MFT N4H	Basic Version w/built in heater
AFRB24-MFT-S N4H	Basic Version w/built-in aux. switch & heater
AFRX24-MFT N4	Flexible Version
AFRX24-MFT-S N4	Flexible Version w/built-in aux. switch
AFRX24-MFT N4H	Flexible Version w/built in heater
AFRX24-MFT-S N4H	Flexible Version w/built in aux. switch & heater



**Technical Data**


Power supply	24 VAC, +/- 20%, 50/60 Hz 24 VDC, +20% / -10%
Power consumption♦	running 7.5 W / heater 25 W holding 3 W
Transformer sizing	10 VA (Class 2 power source) / heater 25 VA
Electrical connection	3 ft [1m], 10 ft [3m] or 16 ft [5m] 18 GA appliance cables, with 1/2" conduit connector AFRB... N4 ♦ AFRX... N4 ♦ -S models: two 3 ft [1m], 10 ft [3m] or 16 ft [5m] appliance cables with 1/2" conduit connectors heater (N4H) terminal block, 26-16 GA
Overload protection	electronic throughout 0 to 95° rotation
Operating range Y*	2 to 10 VDC, 4 to 20 mA (default) variable (VDC, PWM, floating point, on/off)
Input impedance	100 kΩ for 2 to 10 VDC (0.1 mA) 500 Ω for 4 to 20 mA 1500 Ω for PWM, floating point and on/off control
Feedback output U*	2 to 10 VDC, 0.5 mA max
Torque	minimum 180 in-lb (20 Nm)
Direction of rotation*	spring reversible with cw/ccw mounting inside housing motor reversible with built-in switch
Mechanical angle of rotation*	95° (adjustable with mechanical end stop, 35° to 95°)
Running time	motor* 150 seconds (default), variable (70 to 220 seconds) spring <20 sec @ -4°F to 122°F [-20°C to 50°C]; <60 sec @ -22°F [-30°C] spring (with heater) <20 sec @ -4°F to 122°F [-20°C to 50°C]; <60 sec @ -49°F [-45°C]
Angle of Rotation adaptation	off (default)
Override control*	min position = 0% mid. position = 50% max. position = 100%
Position indication	visual indicator, 0° to 95° (0° is spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Humidity	max. 95% RH non-condensing
Ambient temperature	-22°F to 122°F (-30°C to 50°C) with heater -49°F to 122°F (-45°C to 50°C)
Storage temperature	-40°F to 176°F (-40°C to 80°C)
Housing	UL Type 4, NEMA 4, IP66
Housing material	polycarbonate
Noise level	≤40dB(A) motor @ 150 seconds, run time dependent ≤62dB(A) spring return
Agency listings †	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EC & 2006/95/EC
Quality standard	ISO 9001
Servicing	maintenance free
Weight	9.7 lbs. (4.4 kg), 10 lbs. (4.5 kg) with switches 10.5 lbs (4.8 kg) with heater

\* Variable when configured with MFT options  
† Rated Impulse Voltage 800V, Type of action 1\_AA (1\_AA.B for -S version), Control Pollution Degree 4.  
♦ Programmed for 70 sec motor run time. At 150 sec motor run time, transformer sizing is 8.5 VA and power consumption is 6 W running / 3 W holding.

**AFRB24-MFT-S N4, AFRB24-MFT-S N4H, AFRX24-MFT-S N4, AFRX24-MFT-S N4H**


Auxiliary switches	2 x SPDT 3A (0.5A) @ 250 VAC, UL approved one set at +10°, one adjustable 10° to 90°
--------------------	---

**Dimensions with 2-Way Valve**

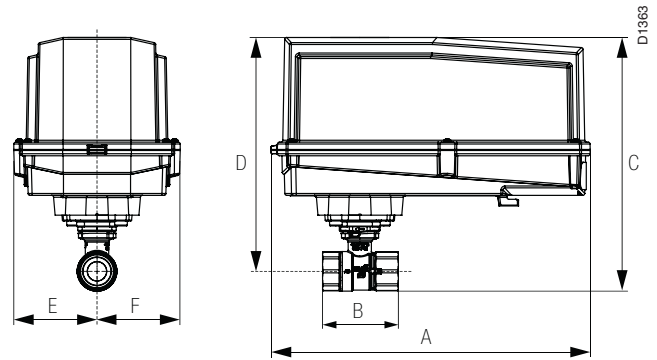

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])	
	Inches	DN [mm]	A	B
B231-B232	1 1/4"	32	3.72" [94.6]	1.84" [47.4]
B238-B240	1 1/2"	40	3.88" [98.5]	2.04" [51.9]
B248-B254	2"	50	4.93" [125.2]	2.73" [69.5]
B261-B265	2 1/2"	65	5.55" [140.9]	2.73" [69.5]
B277-B280	3"	80	5.82" [147.9]	2.73" [69.5]

**Dimensions with 3-Way Valve**

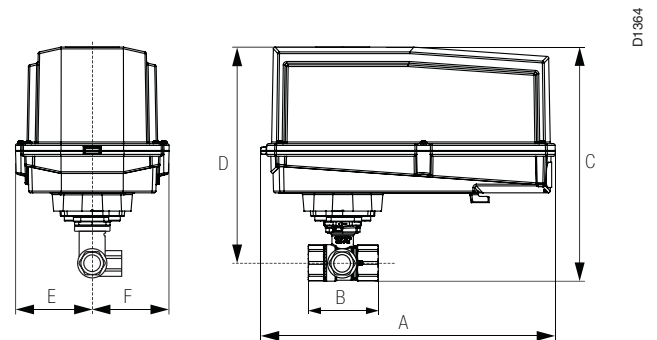

Valve Body	Valve Nominal Size		Dimensions (Inches [mm])		
	Inches	DN [mm]	A	B	C
B329-B331	1 1/4"	32	3.96" [100.6]	2.27" [57.7]	2.14" [54.3]
B338-B341	1 1/2"	40	4.39" [111.6]	2.51" [63.7]	2.40" [61.1]
B347-B352	2"	50	4.90" [124.5]	2.73" [69.5]	2.74" [69.7]

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

# AFRB24-MFT N4, AFRB24-MFT-S N4, AFRB24-MFT N4H, AFRB24-MFT-S N4H AFRX24-MFT N4, AFRX24-MFT-S N4, AFRX24-MFT N4H, AFRX24-MFT-S N4H



NEMA 4, Proportional, Spring Return, Direct Coupled, 24V, Multi-Function Technology®

## Accessories

Tool-06	8mm and 10 mm wrench
43442-00001	Gland (needed for additional wires)
11097-00001	Gasket for Gland (needed for additional wires)

**NOTE:** When using AFRB24-MFT N4, AFRB24-MFT-S N4, AFRB24-MFT N4H, AFRB24-MFT-S N4H, AFRX24-MFT N4, AFRX24-MFT-S N4, AFRX24-MFT N4H, AFRX24-MFT-S N4H actuators, only use accessories listed on this page. For actuator wiring information and diagrams, refer to Belimo Wiring Guide.

## Typical Specification

The actuator must provide proportional damper control in response to a 2 to 10 VDC or, with the addition of a 500Ω resistor, a 4 to 20 mA control input from an electronic controller or positioner. The actuators must be designed so that they may be used for either clockwise or counterclockwise fail-safe operation. Actuators shall use a brushless DC motor controlled by a microprocessor and be protected from overload at all angles of rotation. Run time shall be constant, and independent of torque. A 2 to 10 VDC feedback signal shall be provided for position feedback. Actuators shall be cULus Approved and have a 5 year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

## Wiring Diagrams

### INSTALLATION NOTES







- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 Position feedback cannot be used with Triac sink controller. The actuator internal common reference is not compatible.
- 5 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.
- 8 Contact closures A & B also can be triacs.  
A & B should both be closed for triac source and open for triac sink.
- 9 For triac sink the common connection from the actuator must be connected to the hot connection of the controller.

### APPLICATION NOTES

- ◆ Meets UL requirements without the need of an electrical ground connection.
- ◆ The ZG-R01 500 Ω resistor may be used.

### WARNING Live Electrical Components!


During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

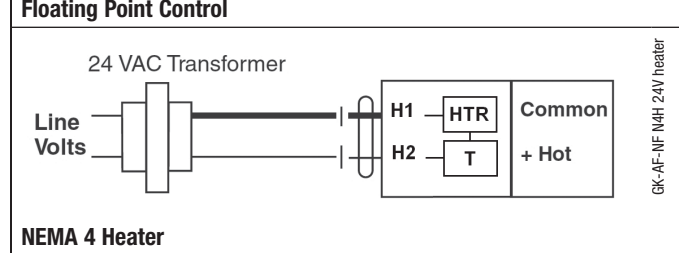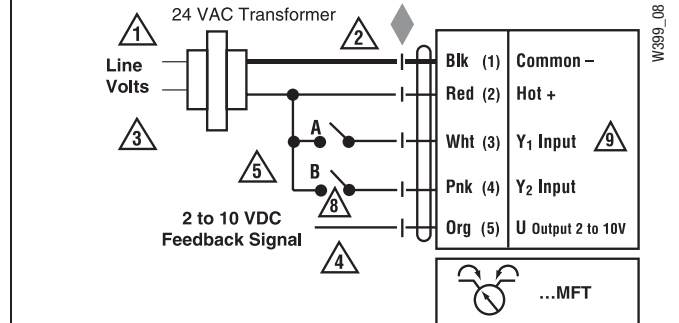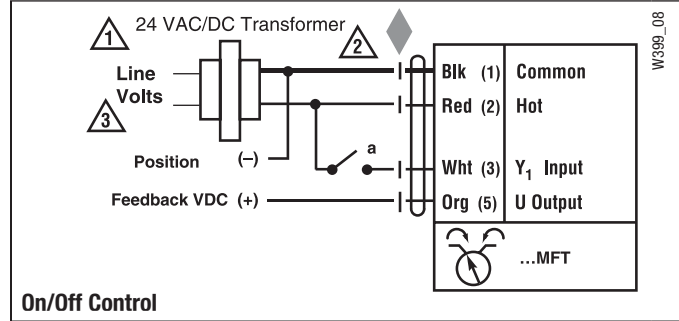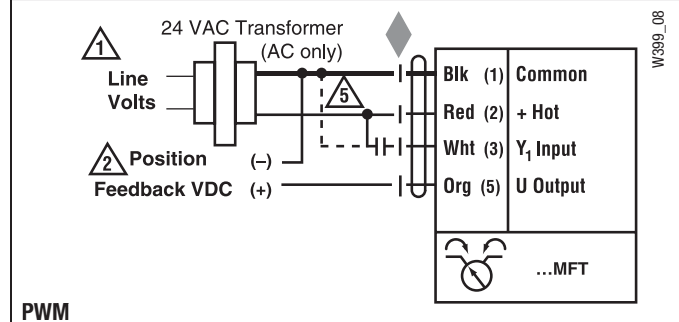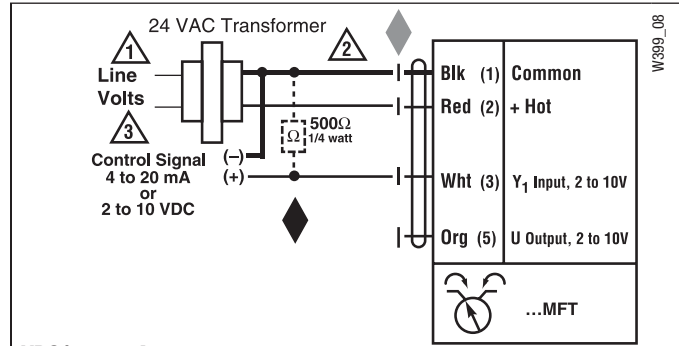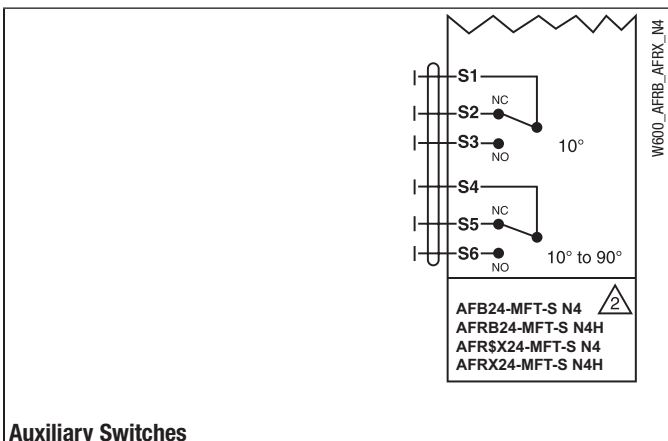

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.



### Dimensions

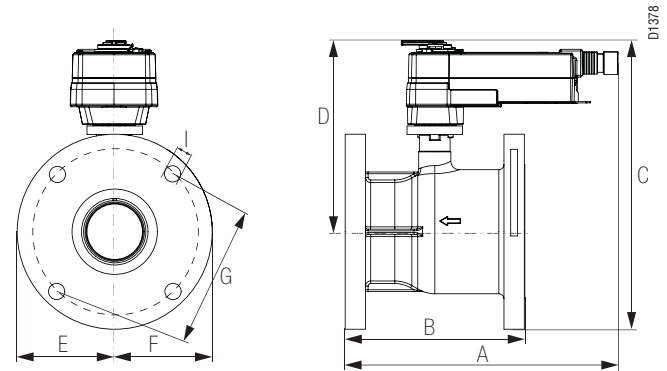

### Models

AFRB24-5-14  
AFRB24-S-5-14

#### Technical Data

Power supply	24 VAC ± 20% 50/60 Hz 24 VDC +20% / -10%
Power consumption	running 5 W holding 2.5 W
Transformer sizing	7.5 VA (class 2 power source)
Electrical connection	AFRB24... 3 ft., 18 GA appliance cable, 1/2" conduit connector <b>-S models:</b> two 3 ft., 18 gauge appliance cables with 1/2" conduit connectors
	AFRX24... 3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] 18 GA appliance or plenum cables, with or without 1/2" conduit connector <b>-S models:</b> two 3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] appliance cables, with or without 1/2" conduit connectors
Overload protection	electronic throughout 0 to 95° rotation
Control	on/off
Direction of rotation	spring reversible with CW/CCW mounting
Angle of rotation	95°
Running time	motor < 75 seconds spring 20 seconds @ -4°F to 122°F [-20°C to 50°C]; < 60 seconds @ -22°F [-30°C]
Position indication	visual indicator, 0° to 95° (0° is full spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2, IP54, Enclosure Type2
Agency listings †	cULus according to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC & 2006/95/EC
Noise level	<50dB(A) motor @ 75 seconds <62dB(A) spring return
Quality standard	ISO 9001

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

#### AFRB24-S, AFRX24-S

Auxiliary switches	2 x SPDT 3A (0.5A) @ 250 VAC, UL approved one set at +10°, one adjustable 10° to 90°
--------------------	---

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter	Face-to-Face Length	Height
			A	B	C
B6250	2½" [65]	F05	7.50" [190.5]	5.50" [139.7]	8.10" [205.4]
B6300	3" [80]		8.00" [203.2]	6.60" [167.6]	8.40" [213.1]
B6400	4" [100]		9.00" [228.6]	8.30" [210.8]	9.30" [235.9]

## Wiring Diagrams


### ✂️ INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 For end position indication, interlock control, fan startup, etc., AFRB24-S and AFRX24-S incorporates two built-in auxiliary switches: 2 x SPDT, 3A (0.5A) @250 VAC, UL Approved, one switch is fixed at +10°, one is adjustable 10° to 90°.

### 📄 APPLICATION NOTES

- ◆ Meets cULus requirements without the need of an electrical ground connection.

- ⚠️ **WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

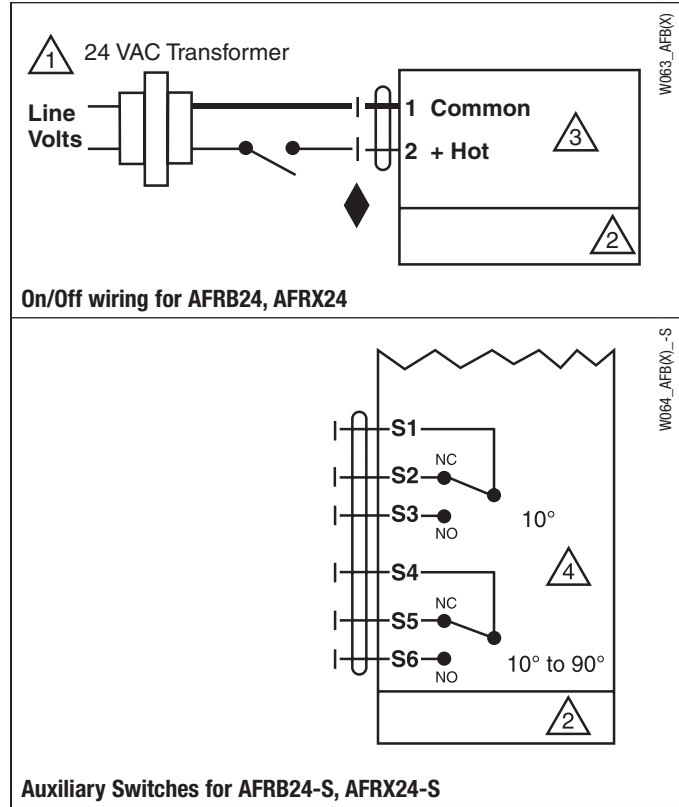





### Models


AFRBUP-5-14  
AFRBUP-S-5-14

Technical Data	
Power supply	24 to 240 VAC -20% / +10%, 50/60 Hz 24 to 125 VDC ±10%
Power consumption	running 7 W
	holding 3.5 W
Transformer sizing	7 VA @ 24 VAC (class 2 power source) 8.5 VA @ 120 VAC 18 VA @ 240 VAC
Electrical connection	
AFRBUP...	3 ft., 18 GA appliance cable, 1/2" conduit connector <b>-S models:</b> two 3 ft., 18 gauge appliance cables with 1/2" conduit connectors
AFRXUP...	3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] 18 GA appliance or plenum cables, with or without 1/2" conduit connector <b>-S models:</b> two 3 ft. [1m], 10 ft. [3m] or 16 ft. [5m] appliance cables, with or without 1/2" conduit connectors
Overload protection	electronic throughout 0 to 95° rotation
Control	on/off
Direction of rotation	spring reversible with CW/CCW mounting
Angle of rotation	95° (adjustable with mechanical end stop, 35° to 95°)
Running time	motor < 75 seconds
	spring 20 seconds @ -4°F to 122°F [-20°C to 50°C]; < 60 seconds @ -22°F [-30°C]
Position indication	visual indicator, 0° to 95° (0° is full spring return position)
Manual override	5 mm hex crank (3/16" Allen), supplied
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2/IP54, Enclosure Type2
Agency listings †	cULus according to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EC & 2006/95/EC
Noise level	<50dB(A) motor @ 75 seconds ≤62dB(A) spring return
Quality standard	ISO 9001

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

AFRBUP-S, AFRXUP-S	
Auxiliary switches	2 x SPDT 3A (0.5A) @ 250 VAC, UL approved one set at +10°, one adjustable 10° to 90°

### Dimensions

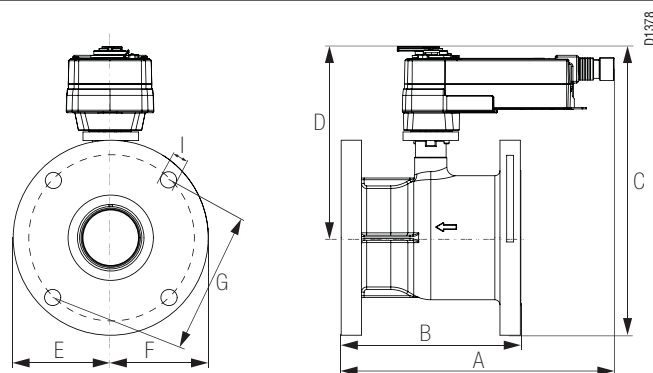

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter	Face-to-Face Length	Height
			A	B	C
B6250	2½" [65]	F05	7.50" [190.5]	5.50" [139.7]	8.10" [205.4]
B6300	3" [80]		8.00" [203.2]	6.60" [167.6]	8.40" [213.1]
B6400	4" [100]		9.00" [228.6]	8.30" [210.8]	9.30" [235.9]

## Wiring Diagrams


### INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel.  
Power consumption and input impedance must be observed.
- 3 No ground connection is required.
- 4 For end position indication, interlock control, fan startup, etc., AFRBUP-S and AFRXUP-S incorporates two built-in auxiliary switches: 2 x SPDT, 3A (0.5A) @250 VAC, UL Approved, one switch is fixed at +10°, one is adjustable 10° to 90°.


### APPLICATION NOTES

- Meets cULus requirements without the need of an electrical ground connection.

**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

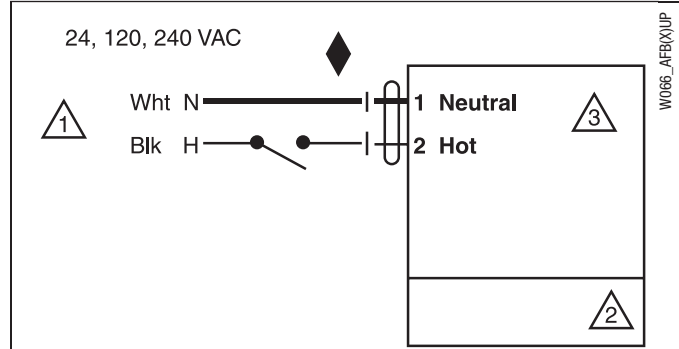

On/Off wiring for AFRBUP, AFRXUP

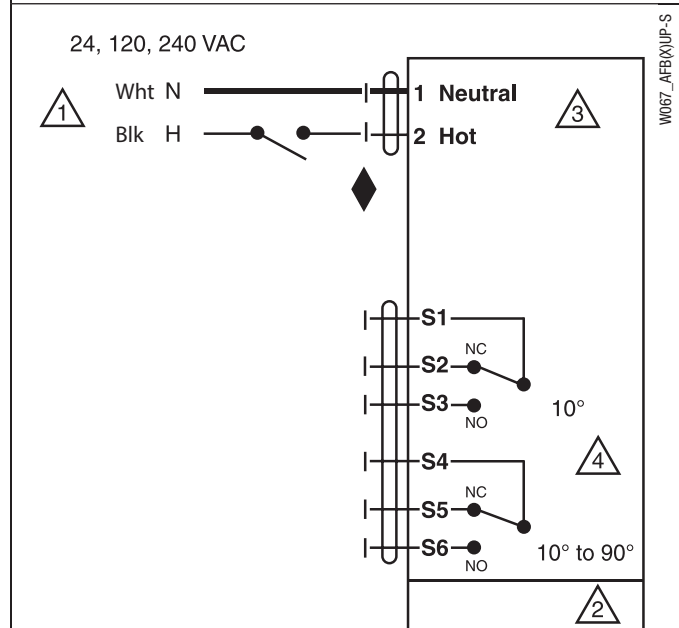

Auxiliary Switches for AFRBUP-S, AFRXUP-S




## Models

GKRB24-3-5-14

Technical Data	
Control	on/off, floating point
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 12 W holding 3 W
Transformer sizing	18 VA (Class 2 power source)
Electrical connection	3 ft, 18 GA plenum rated cable ½" conduit connector
Overload protection	electronic throughout 0° to 95° rotation
Input impedance	100 kΩ (0.1mA), 500 Ω, 1500 Ω (floating point, on/off)
Angle of rotation	max. 95°, adjustable with mechanical stop
Direction of rotation	reversible with  switch
Position indication	visual indicator
Running time	running 150 seconds fail-safe 35 seconds
Manual override	external push button
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Housing	NEMA 2/IP54, Enclosure Type 2
Agency listings †	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EEC and 2006/95/EC
Noise level	<45 dB(A)
Quality standard	ISO 9001

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.


## Dimensions

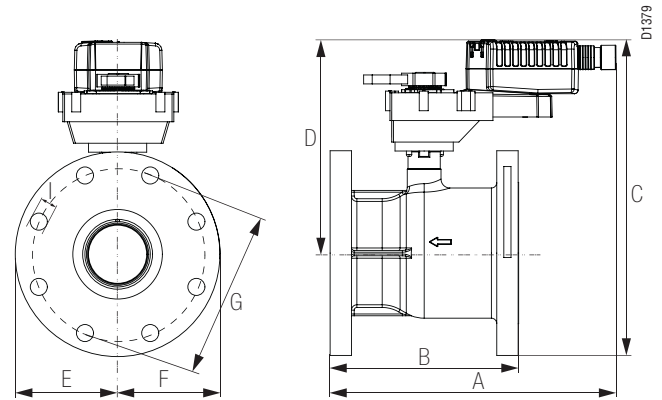

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter	Face-to-Face Length	Height
			A	B	C
B6400	4" [100]	F05	9.00" [228.6]	8.30" [210.8]	9.30" [235.9]
B6500	5" [125]		10.00" [254]	10.30" [261.6]	10.50" [266.4]
B6600	6" [150]		11.00" [279.4]	12.50" [317.5]	11.70" [296.9]

## Electrical Installation


Wiring diagram



**Note**


- Connect via safety isolation transformer.
- Parallel connection of other actuators possible. Note performance data for supply.

Cable lengths



**Note**

When several actuators are connected in parallel, the maximum cable length must be divided by the number of actuators.



**Note**

There are no special restrictions on installation if the supply and data cable are routed separately.

**Cable colors:**  
 1 = black  
 2 = red  
 3 = white  
 5 = orange

A = Actuator  
 C = Control unit  
 L<sub>1</sub> = Belimo connecting cable, 1 m (4 x 0.75 mm<sup>2</sup>)  
 L<sub>2</sub> = Customer cable  
 L<sub>tot</sub> = Maximum cable length

Cross section L <sub>2</sub>	Max. cable length L <sub>tot</sub> = L <sub>1</sub> + L <sub>2</sub>		Example for DC
	1 / ~ AC	DC	
0.75 mm <sup>2</sup>	≤30 m	≤5 m	1 m (L <sub>1</sub> ) + 4 m (L <sub>2</sub> )
1.00 mm <sup>2</sup>	≤40 m	≤8 m	1 m (L <sub>1</sub> ) + 7 m (L <sub>2</sub> )
1.50 mm <sup>2</sup>	≤70 m	≤12 m	1 m (L <sub>1</sub> ) + 11 m (L <sub>2</sub> )
2.50 mm <sup>2</sup>	≤100 m	≤20 m	1 m (L <sub>1</sub> ) + 19 m (L <sub>2</sub> )

A = Actuator  
 C = Control unit  
 L<sub>1</sub> = Belimo connecting cable, 1 m (4 x 0.75 mm<sup>2</sup>)


## Wiring Diagrams

### INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel if not mechanically mounted to the same shaft. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 Position feedback cannot be used with Triac sink controller. The actuator internal common reference is not compatible.
- 5 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.
- 8 Contact closures A & B also can be triacs. A & B should both be closed for triac source and open for triac sink.
- 9 For triac sink the common connection from the actuator must be connected to the hot connection of the controller.


### APPLICATION NOTES

- Meets UL requirements without the need of an electrical ground connection.
- WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

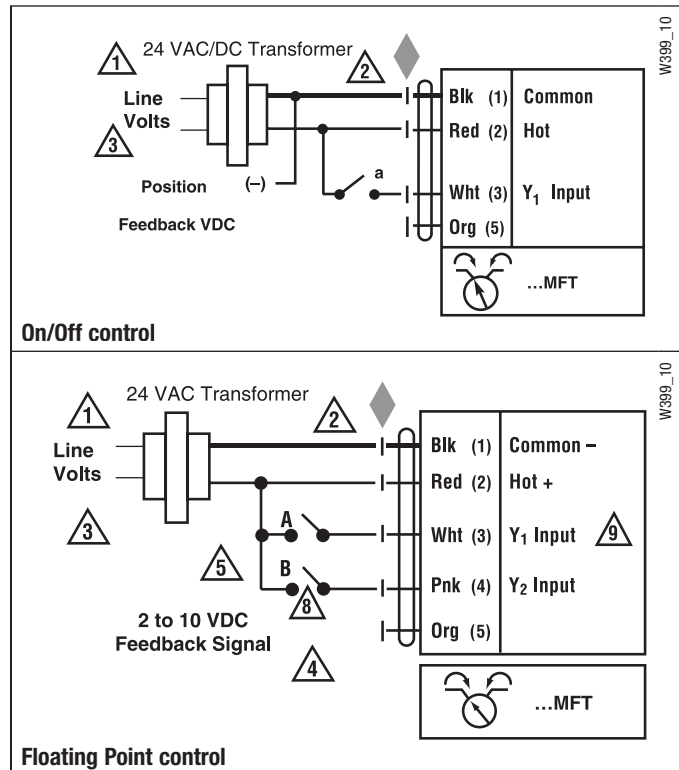



## Dimensions

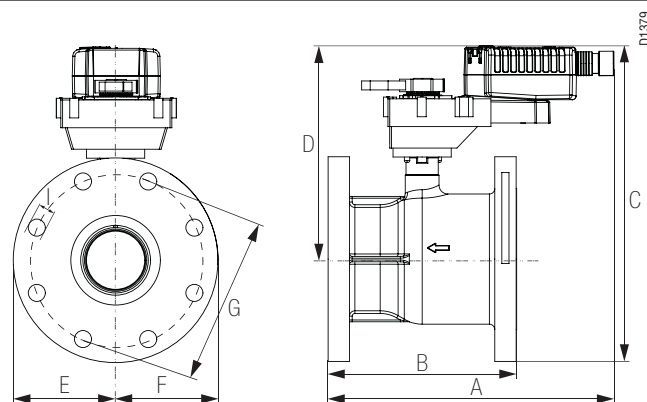

## Models

GKRX24-MFT-5-14

Technical Data	
Control	2 to 10 VDC, 4 to 40 mA (default) variable (VDC, PWM, floating point, on/off)
Power supply	24 VAC ± 20% 50/60 Hz 24 VDC ± 10%
Power consumption	running 12 W holding 3 W
Transformer sizing	21 VA (Class 2 power source)
Electrical connection	3 ft, 18 GA plenum rated cable ½" conduit connector 10 ft. [3m], 16 ft. [5m]
Overload protection	electronic throughout 0° to 95° rotation
Feedback output	2 to 10 VDC, 0.5 mA max, VDC variable
Input impedance	100 kΩ (0.1 mA, 500 Ω) 1500 Ω (PWM, floating point, on/off)
Angle of rotation	max. 95°, adjustable with mechanical stop electronically variable
Direction of rotation	reversible with  switch
Position indication	visual indicator
Running time	150 seconds (default) variable (90 to 150 seconds) fail-safe 35 seconds
Manual override	external push button
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Housing	NEMA 2/IP54, Enclosure Type 2
Housing material	UL94-5V (flammability rating)
Agency listings †	cULus according to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE according to 2004/108/EEC and 2006/95/EC.
Noise level	<45 dB(A)
Quality standard	ISO 9001

† Rated Impulse Voltage 800V, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

Valve Body	Nominal Pipe Size	Top Flange Design	Flange Diameter	Face-to-Face Length	Height
			A	B	C
B6400	4" [100]	F05	9.00" [228.6]	8.30" [210.8]	9.30" [235.9]
B6500	5" [125]		10.00" [254]	10.30" [261.6]	10.50" [266.4]
B6600	6" [150]		11.00" [279.4]	12.50" [317.5]	11.70" [296.9]

## Wiring Diagrams


### INSTALLATION NOTES

- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**  
Actuators may be connected in parallel if not mechanically mounted to the same shaft. Power consumption and input impedance must be observed.
- 3 Actuators may also be powered by 24 VDC.
- 4 Position feedback cannot be used with Triac sink controller. The actuator internal common reference is not compatible.
- 5 Control signal may be pulsed from either the Hot (source) or the Common (sink) 24 VAC line.
- 8 Contact closures A & B also can be triacs. A & B should both be closed for triac source and open for triac sink.
- 9 For triac sink the common connection from the actuator must be connected to the hot connection of the controller.


### APPLICATION NOTES

- Meets UL requirements without the need of an electrical ground connection.
- The ZG-R01 500 Ω resistor may be used.


**WARNING Live Electrical Components!**  
During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

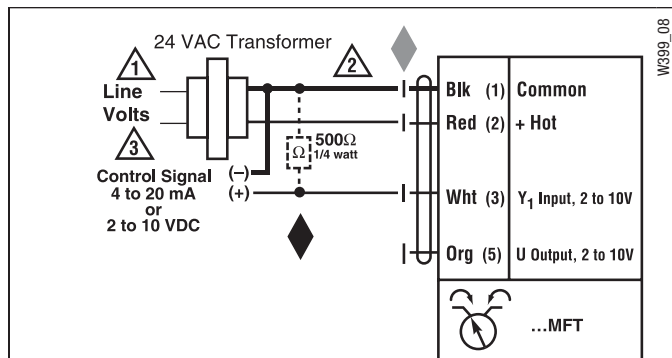


VDC/4-20 mA

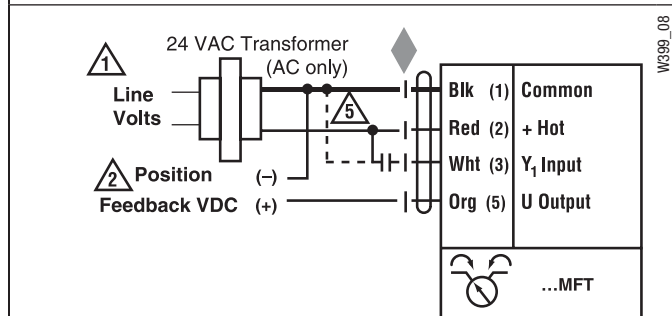

PWM

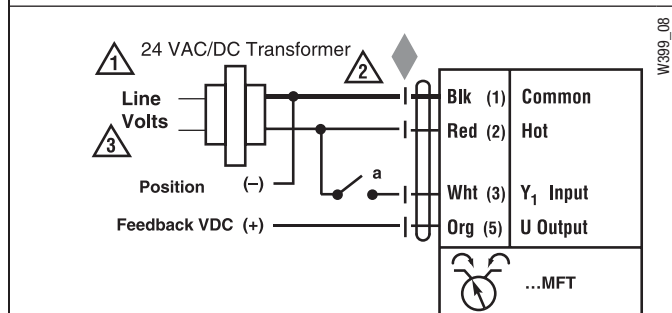

On/Off control

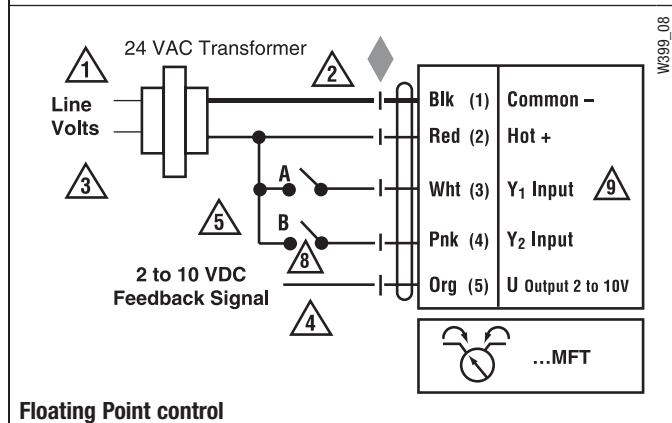


Floating Point control

# CCV-EXT-KIT, CCV and PICCV Valve Neck Extension Kit



Available for Spring and Non-Spring Actuators

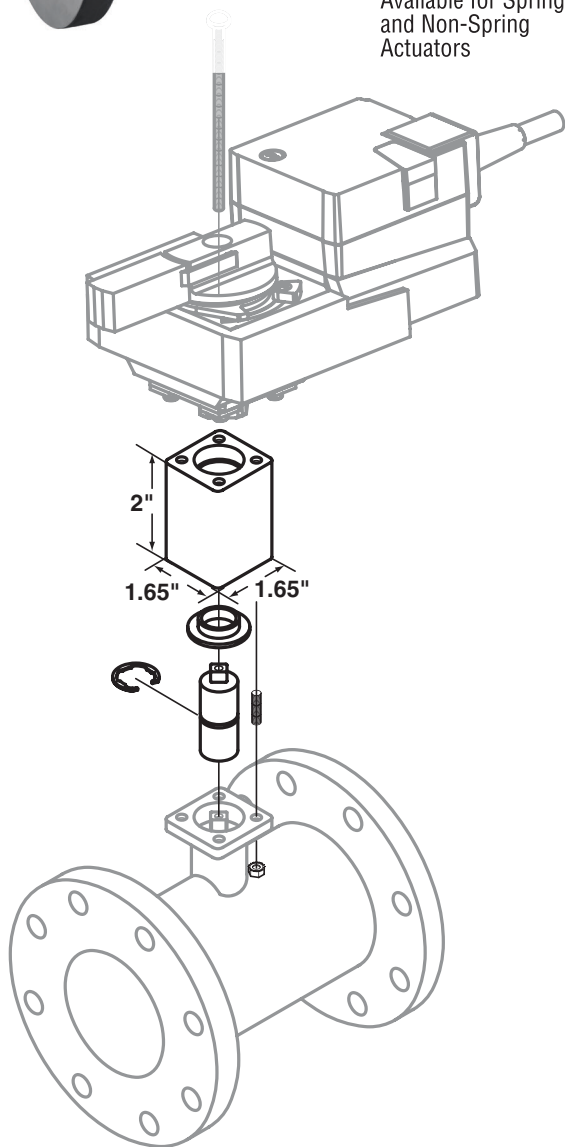

### Application

The CCV-EXT-KIT can be used with most CCV's\* and PICCV in order to achieve a large clearance over the pipe. The Extension Kit will provide an additional 2" of space between the top of the valve and the base of the actuator. bracket is made from aluminum and is not intended as a thermal block.

- Extension kit will be automatically assembled with any Flanged CCV assembly.

Technical Data	
Extension Height	2"
Total Weight	0.7 lb

Material	
Extension Housing	Aluminum - Anodized
Shaft	Stainless Steel
Threaded Hardware	Stainless Steel
Bearing	Oilite® Bearing
Retaining Clip	Stainless Steel

	TR	LRB (X)	ARB (X)	TF	LF	AF
Extension Bracket	•	•	•	•	•	•
CCV-EXT-Kit	•	•	•	•	•	•


- \* Cannot be used with N4 actuators.
- \* Available for previous NF assemblies.
- \* CCV-EXT-KIT cannot be used with any valve smaller than the B212(B) and B312(B).
- \* For use with B2 and B3 series only. Cannot be used with B6 series.

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.



**Application**

The ZS-CCV... weather shield provides moderate protection for valves which are mounted outdoors. This product is designed as a water tight enclosure. The housing allows easy mounting over the actuator, while allowing easy viewing of the actuator in operation. Weather shield for PICCV/CCV to provide protection for actuators in outdoor applications.

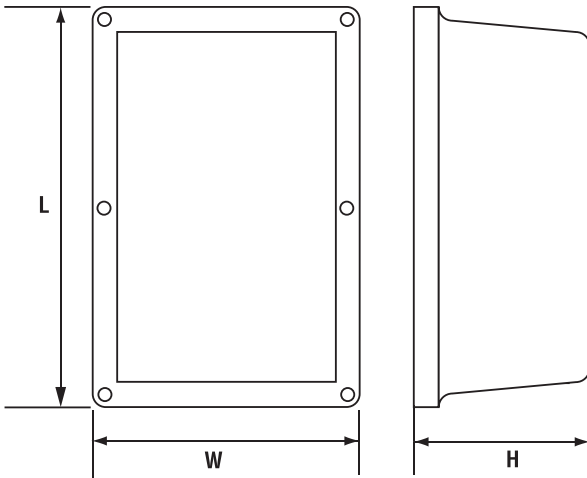

Specifications	
Cover	PETG with UV resistant smoke tint
Perimeter Gasket	Silicon Rubber
Rubber Gasket	Silicon Rubber
Spring Clips	Stainless Steel
Temperature limitations:	-22°F to 122°F (-30°C to 50°C)
Plate (ZS-CCV-100)	Aluminum
Plate	Galvaneal w/black powder coat

Part Number	Actuator
ZS - CCV - 90	LF, AF
ZS - CCV - 100	LRB(X), ARX
ZS - CCV - 110	AFRB(X)

L	W	H
16.25" [413]	8.75" [222]	4.5" [114]

**Parts List**

- Cover including Rubber Perimeter Gasket, Rubber Gasket
- Back Plate
- Anti-Rotation Post with screw and lock washer
- Valve Gasket
- Assorted Cap plugs for unused holes

- Screws AF - 2 bolts with nylon insert locking nuts
- LRB(X), ARX - 1 screw, 1 washer

**No weather shield available at this time for the TF and TR actuators. Designed for NEMA 4 specifications.**

\* Cannot be used with B6 series.



## Auxiliary Switches S1A, S2A

For non-spring return direct-coupled actuators


### Application

The S1A and S2A auxiliary switches are used to indicate when a desired position of a valve is reached or to interface additional controls for a specific control sequence.

### Operation

The S1A and S2A auxiliary switches are mounted onto the direct coupled actuator. The switches are modular units that mount directly onto LR and AR type actuators and are locked into place by guiding grooves on the sides of the actuator.

A driver disk is attached to the actuator handle and offers direct transmission of the actuator position to the micro switch cams. The switching points can be set over the full scale of 0 to 1 simply by adjusting the slotted discs.

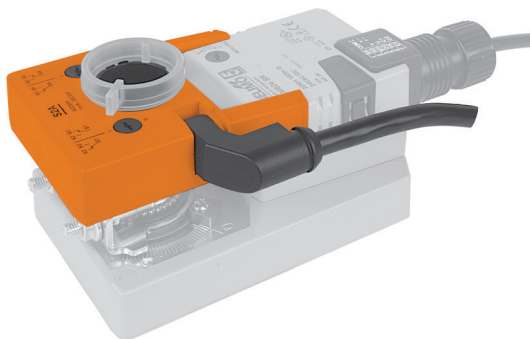


Types		
S1A	1 SPDT	3 ft, 18 GA Appliance Cable
S1A/300	1 SPDT	6 ft, 18 GA Appliance Cable
S1A/500	1 SPDT	10 ft, 18 GA Appliance Cable

S2A	2 SPDT	3 ft, 18 GA Appliance Cable
S2A/300	2 SPDT	6 ft, 18 GA Appliance Cable
S2A/500	2 SPDT	10 ft, 18 GA Appliance Cable

Technical Data	S1A	S2A
Number of switches	1 SPDT	2 SPDT
Weight	4.6 oz [130 g]	6.0 oz [170 g]
Switching capacity	3A (0.5A), 250 VAC	
Switching point	adjustable over full rotation (0° to 95°)	
Pre-setting	with scale possible	
Humidity	5 to 95% RH non-condensing	
Ambient temperature	-22°F to 122°F [-30°C to +50°C]	
Storage temperature	-40°F to 176°F [-40°C to 80°C]	
Housing	NEMA 2 / IP54	
Housing rating	UL94-5VA	
Servicing	maintenance free	
Agency listings	cULus acc. to UL60730-1 CE according to 73/23/EEC	
Quality standard	ISO 9001	

### Wiring Diagram

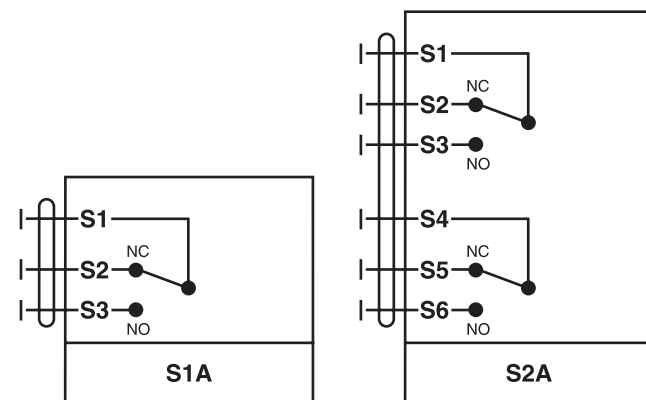


### Mounting Instructions

1. Press down the manual override button and rotate the actuator fully counter clockwise.
2. Place the switch/potentiometer adaptor onto the hex shaft of the handle which is in the center of the valve/actuator coupling.
3. Slide switch onto the actuator using the actuator guiding grooves on the sides of the actuator.
4. Check for correct mating of the adaptor to the switch.
5. Adjust switch dials as necessary.

# Feedback Potentiometer P...A

For the non-spring return direct-coupled actuators

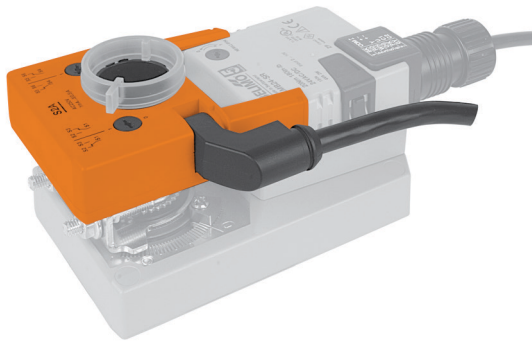

### Mounting Instructions

1. Press down the manual override button and rotate the actuator fully counter clockwise.
2. Place the switch/potentiometer adaptor onto the hex shaft of the handle which is in the center of the valve/actuator coupling.
3. Slide switch onto the actuator using the actuator guiding grooves on the sides of the actuator.
4. Check for correct mating of the adaptor to the switch.
5. Adjust switch dials as necessary.

### Application

The P...A feedback potentiometers are used with LR and AR actuators to provide a resistive signal which varies with valve position.

The P...A units are applied with commercial proportional temperature controllers to provide feedback of the valve position, or with electric or electronic meters to provide position indication. The signal can also be used as a positioner for parallel operation of multiple actuators.

### Operation


The P...A feedback potentiometers are mounted onto the direct coupled actuator. The switches are modular units that mount directly onto LR and AR type actuators and are locked into place by guiding grooves on the sides of the actuator.

A driver disk is attached to the actuator handle and offers direct transmission of the actuator position to the micro switch cams.

Types		
P140A	Feedback Potentiometer	140 Ω
P200A	Feedback Potentiometer	200 Ω
P500A	Feedback Potentiometer	500 Ω
P1000A	Feedback Potentiometer	1000 Ω
P2800A	Feedback Potentiometer	2800 Ω
P5000A	Feedback Potentiometer	5000 Ω
P10000A	Feedback Potentiometer	10000 Ω

Technical Data	P...A
Resistance values	as above
Output	1 W
Tolerance	± 5%
Linearity	± 2%
Resolution	min. 1%
Residual resistance	max. 5% on both sides
Electrical connection	3 ft, 18 GA appliance cable ½" conduit connector
Humidity	5 to 95% RH non-condensing
Ambient temperature	-22°F to 122°F [-30°C to 50°C]
Storage temperature	-40°F to 176°F [-40°C to 80°C]
Housing	NEMA 2 / IP54
Housing rating	UL94-5VA
Servicing	maintenance free
Agency listings	cULus acc. to UL60730-1 CE according to 73/23/EEC
Quality standard	ISO 9001
Weight	4.6 oz [130 g]

### Wiring Diagram

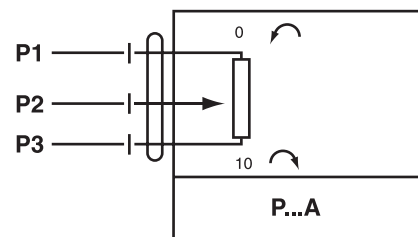



For the non-spring return direct-coupled actuators

**Application**

Belimo non-spring return actuators with terminal strips are can be converted from NEMA 1/IP20 to NEMA 2/IP54 using the protective terminal cover ZS-T.


**The ZS-T terminal cover accessory consists of:**

- Terminal Cover
- Conduit Fitting
- Rubber Seal for Wire Diameter 4-6
- Rubber Seal for Wire Diameter 6-8

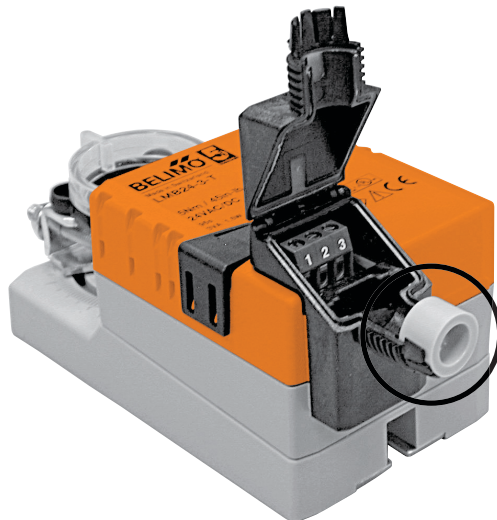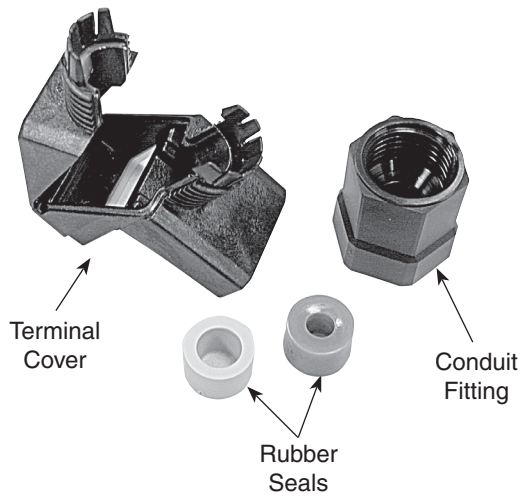

**Mounting the Terminal Cover**

1. Attach terminal cover to actuator, if not done already.
2. Slide the conduit fitting and correct size rubber seal onto wire.
3. Wire up actuator using the terminal strips.
4. Fit rubber seal into slot of terminal cover.

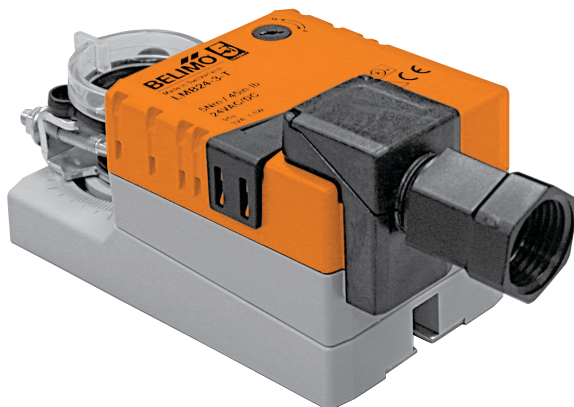

5. Shut terminal top and screw on conduit connector.

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.

# MFT Standard Configuration



	Configuration (Substitute 'V' for 'P' for NV(F) actuators)	Code	Control		Motion		
			Input Range	Position Feedback	Running Time†	Torque %	Adaptation
Voltage	P-10001	A01	2.0 to 10.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10002	A02	0.0 to 10.0 VDC	0.0 to 10.0 VDC	150	100	Manual
	P-10003	A03	2.0 to 10.0 VDC	0.0 to 5.0 VDC	150	100	Manual
	P-10004	A04	4.0 to 7.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10005	A05	6.0 to 9.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10006	A06	10.5 to 13.5 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10007	A07	0.0 to 5.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10009	A09	5.0 to 10.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10010	A10	5.0 to 10.0 VDC	0.0 to 10.0 VDC	150	100	Manual
	P-10013	A13	0.0 to 10.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10015	A15	2.0 to 5.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10016	A16	2.0 to 6.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10017	A17	6.0 to 10.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10018	A18	14.0 to 17.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10020	A20	9.0 to 12.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10028	A28	0.0 to 10.0 VDC	0.0 to 10.0 VDC	100	100	Manual
	P-10031	A31	0.0 to 4.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10063	A63	0.5 to 4.5 VDC	0.5 to 4.5 VDC	150	100	Manual
P-10064	A64	5.5 to 10.0 VDC	5.5 to 10.0 VDC	150	100	Manual	
PWM	P-20001	W01	0.59 to 2.93 sec.	2.0 to 10.0 VDC	150	100	Manual
	P-20002	W02	0.02 to 5.00 sec.	2.0 to 10.0 VDC	150	100	Manual
	P-20003	W03	0.10 to 25.50 sec.	2.0 to 10.0 VDC	150	100	Manual
	P-20004	W04	0.10 to 25.60 sec.	2.0 to 10.0 VDC	150	100	Manual
	P-20005	W05	0.10 to 5.20 sec.	0.0 to 5.0 VDC	150	100	Manual
Floating Point	P-30001	F01	Floating point	2.0 to 10.0 VDC	150	100	Manual
	P-30002	F02	Floating point	0.0 to 10.0 VDC	150	100	Manual
	P-30003	F03	Floating point	2.0 to 10.0 VDC	100	100	Manual
	P-30004	F04	Floating point	0.0 to 5.0 VDC	100	100	Manual
	P-30005	F05	Floating point	0.0 to 10.0 VDC	100	100	Manual
	P-30006	F06	Floating point	0.0 to 5.0 VDC	150	100	Manual
On/Off	P-40001	J01	On/Off	2.0 to 10.0 VDC	75	100	Manual
	P-40002	J02	On/Off	2.0 to 10.0 VDC	150	100	Manual
	P-40003	J03	On/Off	2.0 to 10.0 VDC	75	100	Manual
	P-40004	J04	On/Off	0.0 to 5.0 VDC	100	100	Manual
	P-40005	J05	On/Off	0.0 to 10.0 VDC	100	100	Manual

\*P-10001 is the default configuration.

Example: AF24-MFT US is the basic model. Add the P... pre-set MFT configuration number and list price to the actuator when ordering, as needed.

Note: V-codes used for NV...Series actuator. All other MFT actuators use P-codes.

Note: Most popular configurations available at no additional cost.

Note: If the configuration needed is not listed, please fill in pg. 112 or call Belimo Customer Service at 800-543-9038.

Note: For Non-Spring Return Actuators the 3-digit code can be used in place of the P... pre-set MFT configuration number.

## PRODUCTS

	MODEL	Base Actuator Codes	Control Input	Feedback	Running Time	Angle of Rotation/Stroke	Power Supply	VA Rating	Weight (lb)
45 in.-lb [5 Nm]	LRX24-3	LR000	On/Off, Floating Point	—	95 (Default)	95 deg	24 VAC/DC	3	1.08
	LRX24-SR	LR030	2-10 VDC (4-20mA*)	—	95 (Default)	95 deg	24 VAC/DC	3	1.08
	LRX24-PC	LRXX0†	0-20 V Phasecut	2-10 VDC	95 (Default)	95 deg	24 VAC/DC	3	1.08
	LRX24-MFT	LR100	2-10 VDC (Default)	2-10 VDC	150 (Default)	95 deg	24 VAC/DC	3	1.08
	LRX24-MFT95	LRXX0†	0 to 135 Ohm	2-10 VDC	150 (Default)	95 deg	24 VAC/DC	3	1.08
	LRX120-3	LR060	On/Off, Floating Point	—	95 (Default)	95 deg	120-240 VAC	3	1.08
	LRX120-SR	LR450	2-10 VDC (4-20mA*)	—	95 (Default)	95 deg	120-240 VAC	3	1.08

180 in.-lb [20 Nm]	ARX24-3	AR000	On/Off, Floating Point	—	95 (Default)	95 deg	24 VAC/DC	5	1.08
	ARX24-SR	AR030	2-10 VDC (4-20mA*)	—	95 (Default)	95 deg	24 VAC/DC	5	1.08
	ARX24-PC	ARXX0†	0-20 V Phasecut	2-10 VDC	95 (Default)	95 deg	24 VAC/DC	5	1.08
	ARX24-MFT	AR100	2-10 VDC (Default)	2-10 VDC	150 (Default)	95 deg	24 VAC/DC	5	1.08
	ARX24-MFT95	ARXX0†	0 to 135 Ohm	2-10 VDC	150 (Default)	95 deg	24 VAC/DC	5	1.08
	ARX120-3	AR060	On/Off, Floating Point	—	95 (Default)	95 deg	120-240 VAC	5	1.08
	ARX120-SR	AR450	2-10 VDC (4-20mA*)	—	95 (Default)	95 deg	120-240 VAC	5	1.08

† For correct code please call Belimo Customer service 800-543-9038

	Configuration (Substitute 'V' for 'P' for NV(F) actuators)	Code	Control		Motion		
			Input Range	Position Feedback	Running Time†	Torque %	Adaptation
Voltage	P-10001	A01	2.0 to 10.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10002	A02	0.0 to 10.0 VDC	0.0 to 10.0 VDC	150	100	Manual
	P-10003	A03	2.0 to 10.0 VDC	0.0 to 5.0 VDC	150	100	Manual
	P-10004	A04	4.0 to 7.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10005	A05	6.0 to 9.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10006	A06	10.5 to 13.5 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10007	A07	0.0 to 5.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10009	A09	5.0 to 10.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10010	A10	5.0 to 10.0 VDC	0.0 to 10.0 VDC	150	100	Manual
	P-10013	A13	0.0 to 10.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10015	A15	2.0 to 5.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10016	A16	2.0 to 6.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10017	A17	6.0 to 10.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10018	A18	14.0 to 17.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10020	A20	9.0 to 12.0 VDC	2.0 to 10.0 VDC	150	100	Manual
	P-10028	A28	0.0 to 10.0 VDC	0.0 to 10.0 VDC	100	100	Manual
P-10031	A31	0.0 to 4.0 VDC	2.0 to 10.0 VDC	150	100	Manual	
P-10063	A63	0.5 to 4.5 VDC	0.5 to 4.5 VDC	150	100	Manual	
P-10064	A64	5.5 to 10.0 VDC	5.5 to 10.0 VDC	150	100	Manual	
PWM	P-20001	W01	0.59 to 2.93 sec.	2.0 to 10.0 VDC	150	100	Manual
	P-20002	W02	0.02 to 5.00 sec.	2.0 to 10.0 VDC	150	100	Manual
	P-20003	W03	0.10 to 25.50 sec.	2.0 to 10.0 VDC	150	100	Manual
	P-20004	W04	0.10 to 25.60 sec.	2.0 to 10.0 VDC	150	100	Manual
	P-20005	W05	0.10 to 5.20 sec.	0.0 to 5.0 VDC	150	100	Manual
Floating Point	P-30001	F01	Floating point	2.0 to 10.0 VDC	150	100	Manual
	P-30002	F02	Floating point	0.0 to 10.0 VDC	150	100	Manual
	P-30003	F03	Floating point	2.0 to 10.0 VDC	100	100	Manual
	P-30004	F04	Floating point	0.0 to 5.0 VDC	100	100	Manual
	P-30005	F05	Floating point	0.0 to 10.0 VDC	100	100	Manual
	P-30006	F06	Floating point	0.0 to 5.0 VDC	150	100	Manual
On/Off	P-40001	J01	On/Off	None	75	100	Manual
	P-40002	J02	On/Off	2.0 to 10.0 VDC	150	100	Manual
	P-40003	J03	On/Off	None	75	100	Manual
	P-40004	J04	On/Off	0.0 to 5.0 VDC	100	100	Manual
	P-40005	J05	On/Off	0.0 to 10.0 VDC	100	100	Manual

\*P-10001 is the default configuration.

# Custom MFT Configuration Order Form

FAX: USA Toll Free 1-800-228-8283



## #1 Select an Actuator

(use one sheet for each unique actuator/configuration)

	Quantity		Quantity
<input type="checkbox"/> AF24-MFT US	_____	<input type="checkbox"/> AMX24-MFT	_____
<input type="checkbox"/> AF24-MFT-S US	_____	<input type="checkbox"/> AMX24-MFTX1	_____
<input type="checkbox"/> NF24-MFT US	_____	<input type="checkbox"/> NMX24-MFT	_____
<input type="checkbox"/> LF24-MFT US	_____	<input type="checkbox"/> NMX24-MFTX1	_____
<input type="checkbox"/> LF24-MFT-S US	_____	<input type="checkbox"/> LMX24-MFT	_____
<input type="checkbox"/> AF24-MFT95 US	_____	<input type="checkbox"/> LMX24-MFTX1	_____
<input type="checkbox"/> NV24-MFT US	_____	<input type="checkbox"/> LRX24-MFT	_____
<input type="checkbox"/> NVF24-MFT US	_____	<input type="checkbox"/> GMX24-MFT95	_____
<input type="checkbox"/> NVF24-MFT-E US	_____	<input type="checkbox"/> AMX24-MFT95	_____
<input type="checkbox"/> NVFD24-MFT US	_____	<input type="checkbox"/> NMX24-MFT95	_____
<input type="checkbox"/> NVFD24-MFT-E US	_____	<input type="checkbox"/> LMX24-MFT95	_____
<input type="checkbox"/> GMX24-MFT	_____	<input type="checkbox"/> LHX24-MFT	_____
<input type="checkbox"/> GMX24-MFTX1	_____	<input type="checkbox"/> LUX24-MFT	_____

(-S=Auxiliary Switch)

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Phone \_\_\_\_\_ Fax \_\_\_\_\_

Email \_\_\_\_\_

### FIELD LABELING: LBL-MFT

Custom configuration labels required  
 1-3/8" X 1-1/4" orange labels preprinted to your specifications 12 label sets per sheet.  
 Includes configuration code and wiring labels.

## #2 Create a Custom Configuration

### 1 Angle of rotation setting

Deactivated (Default) The following settings 2 - 5 refer to the full angle of rotation of 95°.

Activated The following settings 2 - 5 are automatically adapted to the effective mechanical angle of rotation.

Manual triggering by pressing the push button twice.

Automatic triggering each time the unit is powered up or by pressing the push button twice.

### 2 Control Types

VDC	PWM	Floating Point	On/Off
<input type="checkbox"/> 2 - 10	<input type="checkbox"/> 0.2 to 5.0 seconds	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> 0 - 10	<input type="checkbox"/> 0.1 to 25.5 seconds		
<input type="checkbox"/> Variable	<input type="checkbox"/> 0.59 to 2.93 seconds		
Start <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> · <input type="checkbox"/>	<input type="checkbox"/> Variable		
Stop <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> · <input type="checkbox"/>	Start <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> · <input type="checkbox"/>		
	Stop <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> · <input type="checkbox"/>		

### 3 Feedback Signals U<sub>5</sub>

Position Feedback U DC 2...10 V (Default)

Position Feedback U DC 0...10 V

Position Feedback U Start DC  ·  V (0...8 V) The finish must be at least 2 V above the start!  
 Finish DC  ·  V (2...10 V)

### 4 Running Time

150 seconds (Default)

Running time  seconds (75...300 seconds) (in 5 second increments)

**Note:** The sound power level [dB(A)] increases when the running time is below 150 seconds.

LM	35...150 seconds
NM	45...170 seconds
AM	90...300 seconds
GM	90...300 seconds
Others	75...300 seconds

### 5 Override control and electronic angle of rotation limiting

Min. (min. position) =  % (0...100%) ↯ (beginning of working range) default 0

ZS (intermediate position) =  % (0...100%) (0% = Min.; 100% = Max.) default 50

Max. (max. position) =  % (0...100%) ↯ (end of working range) default 100

P10419 - 09/13 - Subject to change. © Belimo Aircontrols (USA), Inc.