



May not be as shown



FRONT VIEW

Canarm/LFI's standard fans follow a tradition of quality in design, materials and construction. All our standard fans are developed to be efficient and economically priced. Fans are now available with EC motors allowing you to **save up to 70% on energy costs.**

To determine the proper Canarm/LFI fan for your applications, use the following formula.

$$\text{Number of cubic feet in room} / \text{Number of minutes per air change} = \text{Required C.F.M. Capacity}$$

EXAMPLE: A general office, (see chart) which requires an air change every ten minutes, would require the following fan capacity.

$$\text{If office is } 100' \times 40' \times 10' = 40,000 \text{ cubic ft}$$

$$40,000 \text{ cubic ft} / 10 \text{ minutes per air change} = 4000 \text{ Required C.F.M.}$$

From the chart, you would select a fan that is rated at 4000 C.F.M. at 1/8" S.P. (Static Pressure)

FEATURES

- Available in 8" to 36" sizes
- High efficiency totally enclosed EC motor
- Rugged steel welded box housing with durable powder coat finish
- Osha guard on intake side of fan
- Shipped completely assembled.

Application	Minutes per Air Change	Application	Minutes per Air Change	Application	Minutes per Air Change	Application	Minutes per Air Change
Assembly Hall	7	Church	15	Foundry	4	Pressing Room	1
Attic	2	Classroom	6	Garage	5	Projection Booth	2
Auditorium	10	Dance Hall	5	General Office	10	Summer Cooling	1
Barber Shop	6	Department Store	6	Gymnasium	8	Toilet	3
Basement	8	Dry Cleaning	5	Laundry	2	Transformer Room	1
Battery Room	4	Engine Room	6	Locker Room	3	Warehouse	12
Boiler Room	1	Factory	6	Machine Shop	8	Welding Shop	2
Bowling Alley	5	Forge Room	3	Plating Room	3		

8" - 24" sizes: Now upgrade with tiebar shutters and magnets for quieter operation and superior seal


PERFORMANCE SPECIFICATIONS

MODEL	SPEED	BLADE DIAMETER	RPM	HP	VOLTAGE	AMPS (FLA)	WEIGHT (LBS)	dB(A) @5 ft	CFM @ STATIC PRESSURE				FRAMING DIMENSIONS
									0.00"	0.10"	0.125"	0.25"	
SD8-ECV	Variable	8"	1800	1/4	115/208-280	2.8/1.7-1.3	12	48	360	270	230	0	11" X 11"
SD10-ECV	Variable	10"	1800	1/4	115/208-280	2.8/1.7-1.3	13	56	690	590	570	0	13" X 13"
SD12-EC	Variable	12"	1800	1/4	115/208-280	2.8/1.7-1.3	32	60	1650	1540	1510	1390	15" X 15"
SD14-EC	Variable	14"	1800	1/4	115/208-280	2.8/1.7-1.3	34	65	2180	2080	2060	1890	17" X 17"
SD16-EC	Variable	16"	1800	1/4	115/208-280	2.8/1.7-1.3	36	63	2370	2270	2210	2063	19" X 19"
SD18-EC	Variable	18"	1800	1/2	115/208-280	3.5/2.2-1.7	37	73	3200	3090	3040	2920	21" X 21"
SD20-EC	Variable	20"	1800	1/2	115/208-280	5.3/3.3-2.6	45	77	3440	3240	3180	2930	23" X 23"
SD24-EC	Variable	24"	1200	1/2	115/208-280	5.7/3.5-2.8	56	70	5050	4910	4810	4400	27" X 27"
SD30-EC	Variable	30"	1000	3/4	115/208-280	9.5/5.2-4.2	72	82	8000	7000	6000	5000	33" X 33"
SD36-EC	Variable	36"	1000	3/4	115/208-280	9.5/5.2-4.2	88	84	10000	8500	8000	6200	39" X 39"

PLEASE NOTE: The above is subject to change without notice as these are still in development.

DIMENSIONS

FAN SIZE	A X A SQUARE	B	C	D (c/c)	E	N
8"	13 1/4"	13 1/2"	4"	12"	10 3/4"	2
10"	15 1/4"	13 1/2"	4"	14"	12 3/4"	2
12"	17 1/4"	16 1/2"	6"	16"	14 3/4"	3
14"	19 1/4"	16 1/2"	6"	18"	16 3/4"	3
16"	21 1/4"	16 1/2"	6"	20"	18 3/4"	4
18"	23 1/4"	16 1/2"	6"	22"	20 3/4"	4
20"	25 1/4"	17	6 3/4"	24"	22 3/4"	5
24"	29 1/4"	18"	6 3/4"	28"	26 3/4"	5
30"	35 1/4"	19"	6"	34"	32 3/4"	16
36"	41 1/4"	19"	6"	40"	38 3/4"	20

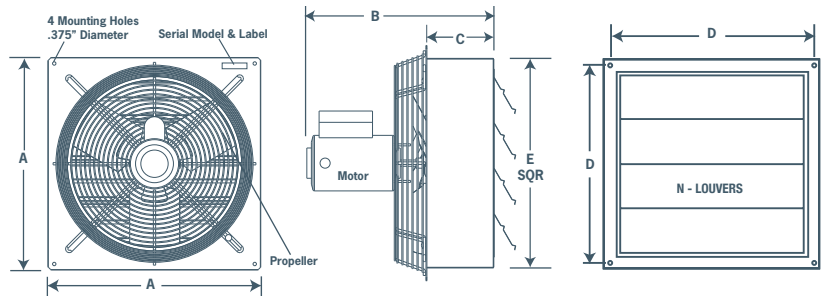

ACCESSORIES

- Grey plastic weather hood
- Galvanized metal hood
- 0V to 10V Control

CANARM LTD. - Corporate Office
PO Box 367 2157 Parkedale Ave.,
Brockville, ON
Canada K6V 5V6
Tel: (613) 342-5424 Fax: 1-800-263-4598

Arthur Manufacturing Facility
#7686 Concession 16, RR 4
Arthur, ON
Canada N0G 1A0
Tel: (519) 848-3910 Fax: (519) 848-3948

Montréal Warehouse
2555 Rue Bernard Lefebvre
Laval, PC
Canada H7C 0A5
Tel: (450) 655-2535 Fax: (450) 665-0910

CANARM LTD. - USA Warehouse
808 Commerce Park Drive
Ogdensburg, New York,
USA 13669
Tel: 1-800-267-4427 Fax: 1-800-263-4598