


# 5" Diameter Single Shaft Open Fan/Blower Motors

## Furnaces - Air Handlers - Fan Coils - Air Conditioning

### Features:

- Auto Protector
- Continuous Air Over
- Open Construction
- Permanent Split Capacitor
- 1/2" Dia. Flatted Shaft
- 42 Frame
- 60 Hz
- Sleeve Bearing


OEM Replacements for: Reznor, Luxaire, Armstrong, Payne, Day & Night, Bryant, Bohn, Intertherm, Kodair, Dole, Coleman, Janitrol, Steward Warner, International Heater Etc.

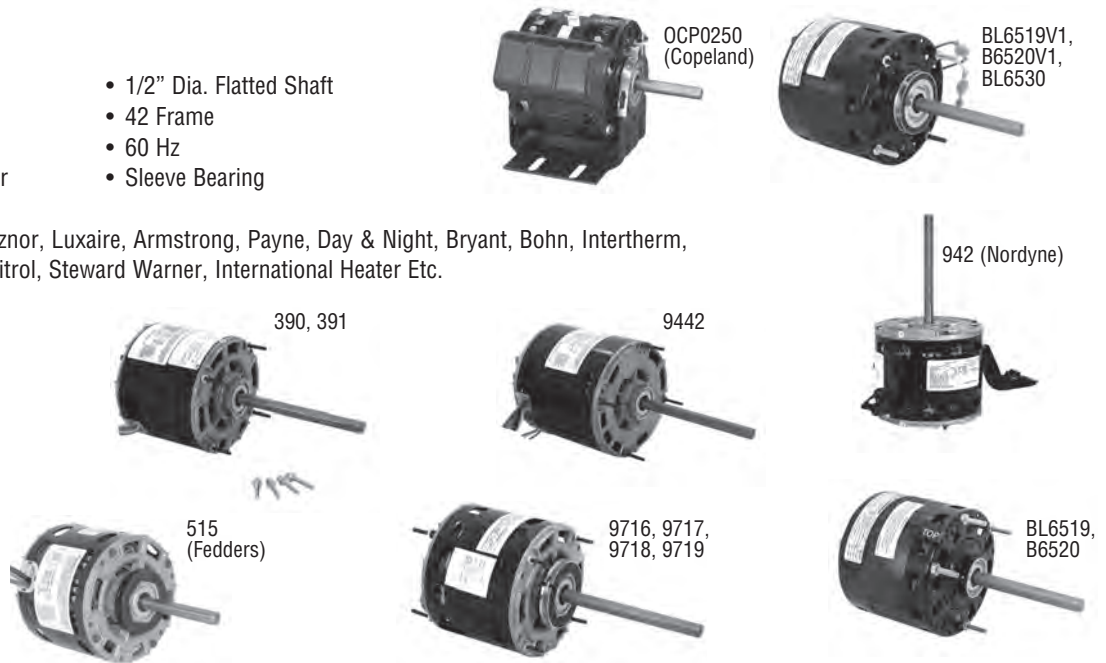

| HP              | RPM  | Speeds | Volts   | Amps            | Stock Number | Rotation | Capacitor   | Dim. Ref. | Notes    |
|-----------------|------|--------|---------|-----------------|--------------|----------|-------------|-----------|----------|
| 1/4             | 1050 | 1      | 115     | 6.2             | 942          | CWSE     | 7.5MFD-370V | 2         | 3        |
| 1/4~1/5~1/7     | 1050 | 3      | 115     | 3.7-3.1-2.4     | 390          | REV      | 7.5MFD-370V | 1         | 9,26     |
| 1/4~1/5~1/7     | 1075 | 3      | 115     | 4.8-3.1-2.2     | 9717         | REV      | 7.5MFD-370V | 6         | 7,27,358 |
| 1/4~1/5~1/6     | 1075 | 3      | 115     | 4.7-3.7-3.1     | BL6519V1     | REV      | 5MFD-370V   | 5         | 7,26,357 |
| 1/4~1/5~1/6     | 1075 | 3      | 115     | 4.7             | BL6519       | REV      | 5MFD-370V   | 3         | 22       |
| 1/4             | 1100 | 1      | 208-230 | 1.5             | 515          | CWSE     | 5MFD-370V   | 4         | 3,       |
| 1/4~1/5~1/7     | 1050 | 3      | 208-230 | 1.5-1.2-1.0     | 391          | REV      | 7.5MFD-370V | 1         | 9,26     |
| 1/4~1/5~1/6     | 1075 | 3      | 208-230 | 2.0-1.4-.9      | 9719         | REV      | 5MFD-370V   | 7         | 7,27     |
| 1/4~1/5~1/6     | 1075 | 3      | 230     | 2.0             | B6520        | REV      | 5MFD-370V   | 3         | 22       |
| 1/4~1/5~1/6     | 1075 | 3      | 230     | 2.0-1.2-.9      | B6520V1      | REV      | 5MFD-370V   | 5         | 7,26,358 |
| 1/4~1/5~1/6~1/8 | 1050 | 4      | 277     | 1.5-1.2-1.0-0.8 | 9442         | REV      | 7.5MFD-370V | 1         | 9,26     |
| 1/4~1/6~1/10    | 1625 | 3      | 115     | 4.0-2.3-1.5     | 9716         | REV      | 7.5MFD-370V | 6         | 7,27,358 |
| 1/4~1/6~1/10    | 1625 | 3      | 208-230 | 1.8-.98-.64     | 9718         | REV      | 5MFD-370V   | 6         | 7,27,358 |
| 1/4             | 1625 | 1      | 230     | 1.5             | OCP0250      | CCWSE    | Included    | 8         | 3,150    |
| 1/3~1/4~1/6     | 1075 | 3      | 115     | 6.3-3.6-2.5     | BL6530       | REV      | 15MFD-370V  | 5         | 7,26     |

### Notes:

3. Special OEM Replacement Motor (see pages 94-132)
7. Resilient Mounting rings Included
9. Reversing plug
22. 3 Thru bolts, 4.42 dia. bolt circle
26. Extended thru bolts, shaft end
27. Extended thru bolts, both ends
150. Rated 50/60 HZ
357. 4 thru bolts, 4.42 dia. bolt circle
358. 4 thru bolts, 4.62 dia. bolt circle



### Approximate Dimensions

| Ref. | BM   | C     | N    | R    |
|------|------|-------|------|------|
| 1    | 4.25 | 10.25 | 6.00 |      |
| 2    | 4.00 | 7.75  | 3.75 |      |
| 3    | 4.09 | 8.75  | 4.66 |      |
| 4    | 4.25 | 8.21  | 3.96 | 4.83 |
| 5    | 4.09 | 8.75  | 4.66 | 4.83 |
| 6    | 5.25 | 11.00 | 5.75 | 5.81 |
| 7    | 4.75 | 10.50 | 5.75 | 5.31 |
| 8    | 3.84 | 6.88  | 3.04 |      |