


## 5-5/8" Diameter (Totally Enclosed) - Outdoor Ball and Sleeve Bearing

### Condensers - Heat Pump - Refrigeration

#### Features:

- Energy Efficient \$
- Permanent Split Capacitor
- Class B or Class F Insulation
- Ball or Sleeve Bearing
- 1/2" Dia. Flatted Shaft
- 26" (Minimum) to 48" Leads
- 60 HZ
- All Angle Mount
- 60° or 70° C Ambient
- Auto Protector
- Reversible
- 4, 6, and 8 Pol
- Extended Thru Bolts

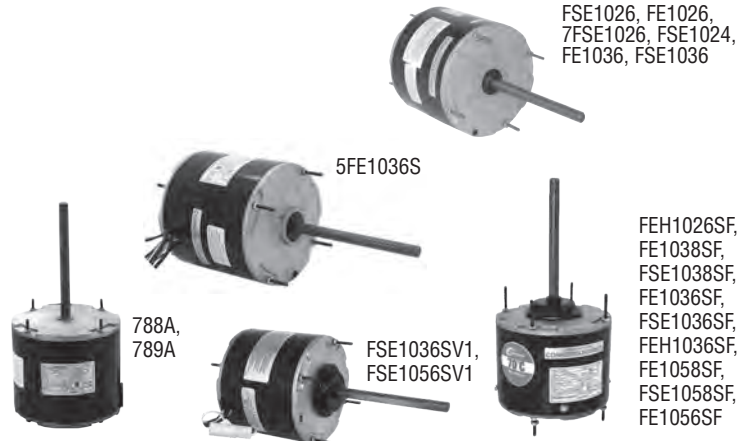


#### "TURN-A-BOU" 1 AND 2-SPEED (CAPACITOR NOT INCLUDED)

| HP  | RPM  | Volts   | Speeds | Amps<br>Rated | Amps<br>Max. | Insulation<br>Class | Ambient | Stock<br>Number | Bearings | Capacitor   | Dim.<br>Ref. | Notes                   |
|-----|------|---------|--------|---------------|--------------|---------------------|---------|-----------------|----------|-------------|--------------|-------------------------|
| 1/4 | 1075 | 208-230 | 2      | 1.3           | 1.8          | B                   | 60°C    | FSE1026         | Sleeve   | 5MFD/370V   | 1            | 9,71,288,\$             |
| 1/4 | 1075 | 208-230 | 2      | 1.3           | 1.8          | B                   | 60°C    | FE1026          | Ball     | 5MFD-370V   | 1            | 9,71,288,\$             |
| 1/4 | 1075 | 277     | 2      | 1.3           | 1.8          | B                   | 60°C    | 7FSE1026        | Sleeve   | 5MFD/370V   | 1            | 9,71,288,\$             |
| 1/4 | 1075 | 460     | 1      | 0.75          |              | B                   | 60°C    | 788A            | Ball     | 7.5MFD-370V | 8            | 9,26,38,71,288,\$       |
| 1/4 | 1075 | 460     | 1      | 1.0           |              | F                   | 70°C    | FEH1026SF       | Ball     | 7.5MFD/370V | 13           | 311,370,\$ HeatMaster   |
| 1/4 | 1625 | 208-230 | 2      | 1.7           | 2.5          | B                   | 60°C    | FSE1024         | Sleeve   | 5MFD-370V   | 4            | 9,71,288,\$             |
| 1/3 | 825  | 208-230 | 1      | 2.1           |              | F                   | 70°C    | FE1038SF        | Ball     | 7.5MFD/370V | 6            | 311,370,\$ HeatMaster   |
| 1/3 | 825  | 208-230 | 1      | 2.1           |              | F                   | 70°C    | FSE1038SF       | Sleeve   | 7.5MFD/370V | 6            | 40,370,\$ HeatMaster    |
| 1/3 | 1075 | 208-230 | 1      | 2.8           |              | F                   | 70°C    | FE1036SF        | Ball     | 7.5MFD/370V | 5            | 311,370,\$ HeatMaster   |
| 1/3 | 1075 | 208-230 | 1      | 2.7           |              | B                   | 60°C    | FSE1036SV1      | Sleeve   | 7.5MFD/370V | 3            | 9,308,281,\$            |
| 1/3 | 1075 | 208-230 | 1      | 2.8           |              | F                   | 70°C    | FSE1036SF       | Sleeve   | 7.5MFD/370V | 5            | 40,281,\$ HeatMaster    |
| 1/3 | 1075 | 208-230 | 2      | 1.8           | 2.8          | B                   | 60°C    | FE1036          | Ball     | 7.5MFD-370V | 11           | 9,71,288,\$             |
| 1/3 | 1075 | 208-230 | 2      | 1.8           | 2.8          | B                   | 60°C    | FSE1036         | Sleeve   | 7.5MFD/370V | 2            | 9,71,288,\$             |
| 1/3 | 1075 | 460     | 1      | 1.3           |              | F                   | 70°C    | FEH1036SF       | Ball     | 7.5MFD/370V | 14           | 311,370,\$ HeatMaster   |
| 1/3 | 1075 | 460     | 1      | 1.0           |              | B                   | 60°C    | 789A            | Ball     | 7.5MFD-370V | 9            | 10,26,38,71,288,\$ New! |
| 1/3 | 1100 | 575     | 1      | 0.75          | 0.8          | B                   | 60°C    | 5FE1036S        | Ball     | 7.5MFD-440V | 10           | 9,98,311,277,\$         |
| 1/2 | 825  | 208-230 | 1      | 2.5           |              | F                   | 70°C    | FE1058SF        | Ball     | 10MFD/370V  | 7            | 311,370,\$ HeatMaster   |
| 1/2 | 825  | 208-230 | 1      | 2.5           |              | F                   | 70°C    | FSE1058SF       | Sleeve   | 10MFD/370V  | 7            | 40,370,\$ HeatMaster    |
| 1/2 | 1075 | 208-230 | 1      | 4.0           |              | F                   | 70°C    | FE1056SF        | Ball     | 10MFD/370V  | 12           | 311,370,\$ HeatMaster   |
| 1/2 | 1075 | 208-230 | 1      | 4.2           |              | B                   | 60°C    | FSE1056SV1      | Sleeve   | 10MFD/370V  | 14           | 9,308,281,\$            |

#### Notes:

9. Reversing Plug
10. Reversible. Quick connect terminals
26. Extended thru bolts, shaft end only
38. Includes conduit box, mounting screws, gasket, shipped detached
40. Four mounting holes in shell
71. No hubs on either end
98. 1/2" hub on shaft end and slinger
277. 47" leads
281. 36" leads
288. 26" leads (minimum)
308. 1/2" hub on shaft end frame with slinger. Grommet on lead exits.
311. 1/2" dia. shaft, single flat
370. 48" leads



#### Approximate Dimensions

| Ref. | BM   | C     | N    | T   | T1   |
|------|------|-------|------|-----|------|
| 1    | 4.36 | 10.36 | 6.00 | .56 | .88  |
| 2    | 4.86 | 10.86 | 6.00 | .56 | .88  |
| 3    | 4.86 | 11.30 | 6.44 | .56 | .88  |
| 4    | 4.61 | 10.61 | 6.00 | .56 | .88  |
| 5    | 4.86 | 11.36 | 6.50 | .88 | 1.12 |
| 6    | 5.11 | 11.61 | 6.50 | .88 | 1.12 |
| 7    | 5.61 | 12.11 | 6.50 | .88 | 1.12 |
| 8    | 4.99 | 11.05 | 6.06 | —   | .49  |
| 9    | 5.24 | 11.30 | 6.06 | —   | .49  |
| 10   | 5.36 | 11.86 | 6.50 | .56 | .88  |
| 11   | 5.11 | 11.11 | 6.00 | .56 | .88  |
| 12   | 5.36 | 11.86 | 6.50 | .88 | 1.12 |
| 13   | 4.74 | 11.24 | 6.50 | .88 | 1.12 |
| 14   | 5.24 | 11.74 | 6.50 | .88 | 1.12 |