


# 5-5/8" Diameter (Totally Enclosed) - Outdoor Ball and Sleeve Bearing

## Condensers - Heat Pump - Refrigeration

### Features:

- Energy Efficient \$
- Permanent Split Capacitor
- Class B or Class F Insulation
- Ball or Sleeve Bearing
- 1/2" Dia. Flatted Shaft
- 26" (Minimum) to 48" Leads
- 60 HZ
- All Angle Mount
- 60° or 70° C Ambient
- Auto Protector
- Reversible
- 4, 6, and 8 Pole
- Extended Thru Bolts

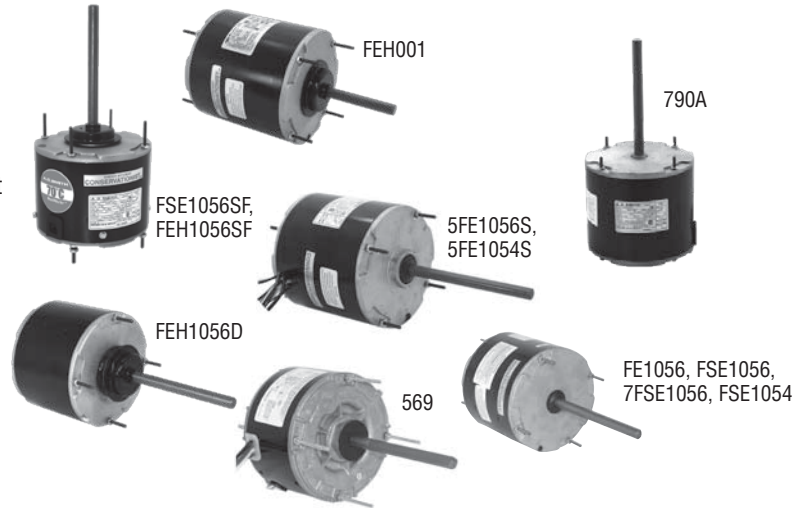


### "TURN-A-BOU" 1 AND 2-SPEED (CAPACITOR NOT INCLUDED)

HP	RPM	Volts	Speeds	Amps		Insulation		Stock			Dim.		Notes
				Rated	Max.	Class	Ambient	Number	Bearings	Capacitor	Ref.		
1/2	1075	208-230	1	4.0		F	70°C	FSE1056SF	Sleeve	10MFD/370V	4	40,281, \$	HeatMaster
1/2	1075	208-230	2	2.8	3.5	B	60°C	FE1056	Ball	10MFD-370V	5	9,288, \$	
1/2~1/3	1075	208-230	2	2.9-1.8		B	60°C	569	Sleeve	10MFD/370V	2	1,37,308,288, \$	
1/2	1075	208-230	2	2.8	4.0	B	60°C	FSE1056	Sleeve	10MFD/370V	1	9,71,288, \$	
1/2	1075	208-230/460	1	2.4/1.2		B	60°C	FEH1056D	Ball	10MFD-370V	10	7,9,26,293,288, \$	
1/2	1075	277	2	2.4	3.2	B	60°C	7FSE1056	Sleeve	10MFD/370V	1	9,71,288, \$	
1/2	1075	460	1	1.2	1.35	B	60°C	FEH001	Ball	10MFD-370V	9	9,98,119,288, \$	
1/2	1075	460	1	1.5		B	60°C	790A	Ball	10MFD-370V	6	9,26,38,288, \$	
1/2	1075	460	1	1.5		F	70°C	FEH1056SF	Ball	10MFD/370V	11	311,370, \$	HeatMaster
1/2	1100	575	1	1.1	1.2	B	60°C	5FE1056S	Ball	7.5MFD-370V	8	9,98,277,311,277, \$	
1/2	1625	208-230	2	3.0	4.2	B	60°C	FSE1054	Sleeve	5MFD-370V	3	9,71, \$	
1/2	1625	575	1	1.0	1.4	B	60°C	5FE1054S	Ball	7.5MFD-440V	7	9,98,277,311,277, \$	

### Notes:

1. Item to be discontinued when stock is depleted
7. Resilient mounting rings included
9. Reversing Plug
26. Extended thru bolts, shaft end only
38. Includes conduit box, mounting screws, gasket, shipped detached
40. Four mounting holes in shell
71. No hubs on either end
98. 1/2" hub on shaft end and slinger
119. Suitable replacement for Aaon
277. 47" leads
281. 36" leads
288. 26" leads (minimum)
293. 9" leads
308. 1/2" hub on shaft end frame with slinger
311. 1/2" dia. shaft, single flat
370. 48" leads

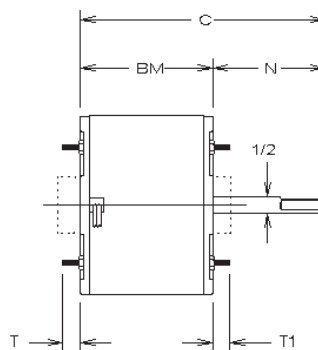

### Approximate Dimensions

Ref.	BM	C	N	T	T1
1	5.36	11.36	6.00	.56	.88
2	5.00	11.02	6.02	.46	1.64
3	5.36	11.36	6.00	.56	.88
4	5.36	11.86	6.50	.88	1.12
5	5.36	11.36	6.00	.56	.88
6	5.61	11.67	6.06	—	.49
7	5.36	11.86	6.50	.56	.88
8	5.61	12.11	6.50	.56	.88
9	5.61	9.61	4.00	.88	.95
10	5.61	11.61	6.00	—	.88
11	5.61	12.11	6.50	.88	1.12