


## Unit Heater Fan Motors

### Features:


- Continuous Duty, Air Over
- Permanent Split Capacitor
- Sleeve & Ball Bearing Models
- Thermally Protected
- 60 Hz
- 48Y Frame

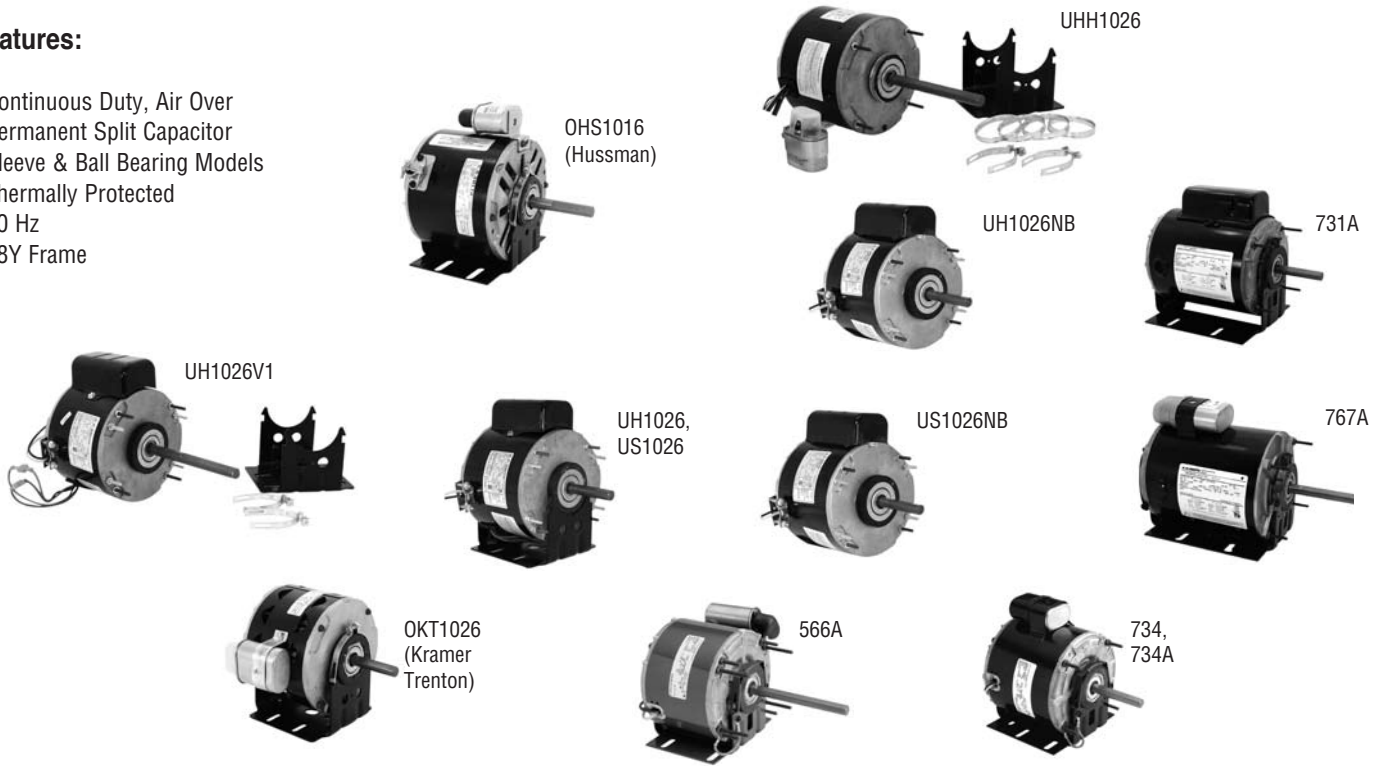

HP	RPM	Speeds	Volts	Amps	Stock				Capacitor	Encl.	Base	Dim.	
					Number	Bearings	Rotation	Rotation				Ref.	Notes
1/5	1075	1	230	1.6	<b>OHS1016</b>	Sleeve	CWLE	5MFD/370V	Semi-encl.	Resilient	1	3,29	
1/4	1075	1	115	3.3	<b>566A</b>	Sleeve	CCWLE	Included	TE	Resilient	3	29	
1/4	1075	1	115	4.9	<b>US1026</b>	Sleeve	REV.	Included	TE	Resilient	2	31,279,286	
1/4	1075	1	115	4.9	<b>US1026NB</b>	Sleeve	REV.	Included	TE	None	2	31,89,279	
1/4	1075	1	115	4.9	<b>UH1026</b>	Ball	REV.	Included	TE	Resilient	2	31,89,279,286	
1/4	1075	1	115	4.9	<b>UH1026NB</b>	Ball	REV.	Included	TE	None	10	31,89	
1/4	1075	1	115	4.9	<b>UH1026V1</b>	Ball	REV.	Included	TE	Resilient	7	31,89	
1/4	1135	1	115	5.0	<b>734</b>	Sleeve	CWSE	Included	TE	Resilient	4	1,29	
1/4	1135	1	115	4.5	<b>734A</b>	Sleeve	CCWLE	Included	TE	Resilient	4	29	
1/4	1075/900	1	115/208-230	3.0/1.5	<b>OKT1026</b>	Ball	CCWLE	Included	Semi-Encl.	Resilient	9	3,31,150	
1/4	1140	1	115/208-230	3.1/1.6	<b>731A</b>	Ball	REV	Included	TE	Resilient	5	29,189	
1/4	1075	1	208-230	1.8	<b>UHH1026</b>	Ball	REV.	4MFD/370V	TE	Resilient	7	6,31,286	
1/4	1725	1	115/230	3.0/1.6	<b>767A</b>	Ball	REV	Included	TE	Resilient	6	29,189 <b>New!</b>	

### Notes:

1. Item to be discontinued when stock is depleted
3. Special OEM motor (see pages 94-137)
6. 60/50 HZ
29. 60°C Ambient
31. 40°C Ambient
89. 60" leads
150. Rated 50/60 HZ
189. Includes split bushing and key for 5/8" shafts
279. 4 thru bolts and 4 dummy studs on a 5.15 dia. bolt circle
286. 3.5" Shaft Height



### Approximate Dimensions

Ref.	BM	R	C	N	T	D
1	4.24		7.24	3.00		3.50
2	4.36	4.92	7.35	2.49	0.65	3.50
3	4.25		9.77	5.52	1.51	3.00
4	5.00		8.39	3.39	0.86	3.00
5	6.25		11.33	5.08	0.88	3.00
6	6.75		11.83	5.08	0.88	3.50
7	4.36	4.92	9.86	5.50	0.65	3.00
8	4.36		7.34	2.97	0.65	3.00
9	4.86		7.33	2.50		3.00
10	4.36		7.34	2.97	0.65	