


Rheem-Ruud

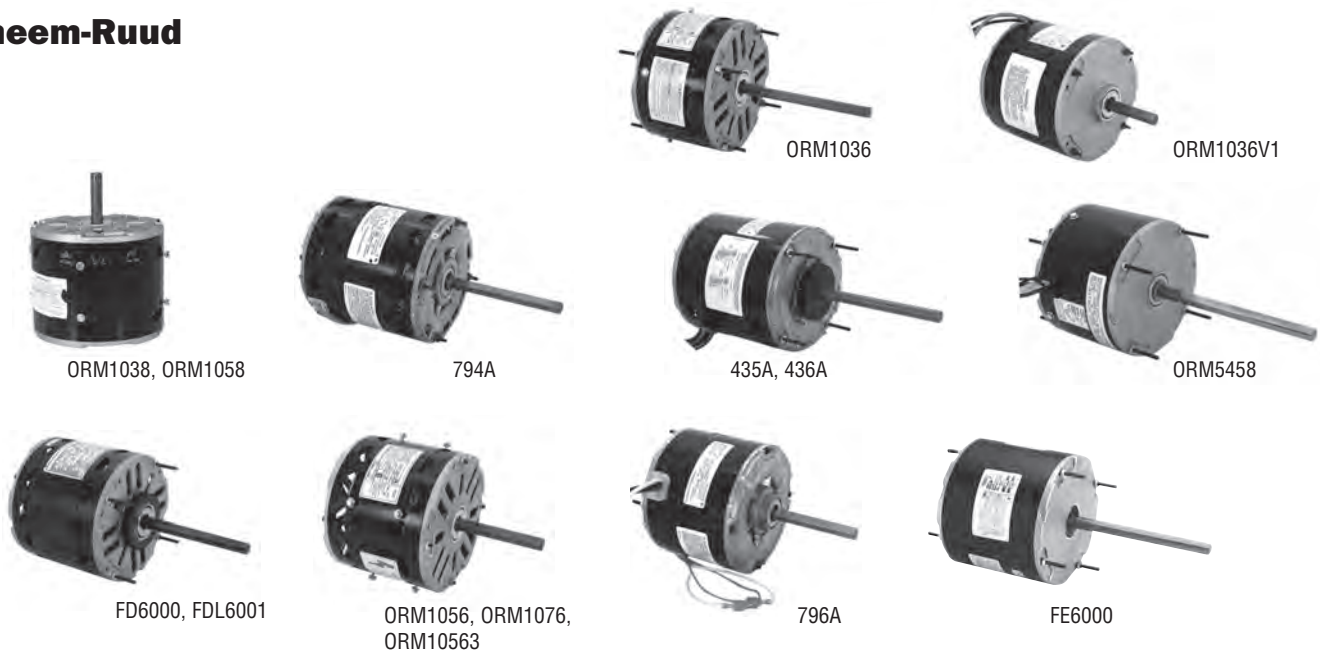

| HP                  | RPM  | Speeds | Volts   | Amps                 | Stock Number | Rotation | Capacitor   | Shaft Dia. & Length | Motor Dia. | "A" Dim. | Cross Reference   | Notes          |
|---------------------|------|--------|---------|----------------------|--------------|----------|-------------|---------------------|------------|----------|---|----------------|
| 1/3                 | 1075 | 1      | 208-230 | 2.2                  | ORM1036      | REV      | 7.5MFD/370V | 1/2" x 5-1/2"       | 5-5/8"     | 4-3/8"   | 51-20688-01<br>87360, 60130   |                |
| 1/3                 | 1075 | 1      | 208-230 | 1.5-1.8              | ORM1036V1    | CCWLE    | 5MFD/370V   | 1/2" x 3-1/4"       | 5-5/8"     | 4-3/8"   | 51-21189-01<br>KA55HZRGR-7898   | 118            |
| 1/3                 | 825  | 2      | 208-230 | 2.8                  | ORM1038      | CCWLE    | 10MFD/370V  | 1/2" x 2-1/8"       | 5-5/8"     | 4-5/8"   | 51-23103-07   | 42             |
| 1/3                 | 1075 | 1      | 460     | 0.9                  | 796A         | REV      | 5MFD/370V   | 1/2" x 4-1/8"       | 5-5/8"     | 4-5/8"   | 51-21853-84   | 40             |
| 1/3                 | 1075 | 1      | 460     | 1.0                  | 436A         | REV      | 5MFD/370V   | 1/2" x 6"           | 5-5/8"     | 4-3/4"   | 51-20468-01   | 2,7            |
| 1/3~1/5             | 1075 | 2      | 208-230 | 2.8-1.7              | FE6000F      | REV      | 7.5MFD/370V | 1/2" x 6"           | 5-5/8"     | 4-7/8"   | 51-23053-21   | 1,2,206        |
| 1/3                 | 1075 | 1      | 208-230 | 2.0                  | ORM5458      | REV      | 7.5MFD/370V | 1/2" x 6-5/8"       | 5-5/8"     | 4-1/8"   | K55HXTDD-8385<br>5458<br>51-20668-11<br>51-23055-11<br>51-20354-11<br>51-23053-11 | 29,<br>40,280  |
| 1/2                 | 1075 | 4      | 115     | 7.0                  | FDL6001A     | REV      | 10MFD/370V  | 1/2" x 5"           | 5-5/8"     | 4-7/8"   | 51-23012-41   | 206            |
| 1/2                 | 1075 | 4      | 115     | 5.7                  | ORM1056      | CCWLE    | 7.5MFD/370V | 1/2" x 3-1/2"       | 5-5/8"     | 4-5/8"   | F48C45A94<br>51-22873-01  | 42             |
| 1/2                 | 825  | 1      | 208-230 | 3.4                  | ORM1058      | CCWLE    | 15MFD/370V  | 1/2" x 3-1/4"       | 5-5/8"     | 4-7/8"   | 51-23103-08<br>51-23101-08  | 6,42           |
| 1/2                 | 1075 | 1      | 460     | 1.7                  | 435A         | REV      | 7.5MFD/370V | 1/2" x 6"           | 5-5/8"     | 5-1/8"   | 51-20470-01   | 2,7            |
| 1/2                 | 1075 | 3      | 115     | 5.9                  | ORM10563     | CCWLE    | 7.5MFD/370V | 1/2" X 3-3/4"       | 5-5/8"     | 4-1/2"   | 51-22686-01   |                |
| 1/2                 | 1075 | 4      | 208-230 | 3.9                  | FD6000       | REV      | 10MFD/370V  | 1/2" x 5"           | 5-5/8"     | 4-7/8"   | 51-23022-41   | 206            |
| 3/4                 | 1075 | 4      | 115     | 10.5                 | ORM1076      | REV      | 15MFD/370V  | 1/2" x 5"           | 5-5/8"     | 5-5/8"   | F48C47A94<br>51-22859-01  | 2,42           |
| 3/4~1/2~<br>1/3~1/4 | 1075 | 4      | 115     | 11.5-9.0-<br>6.1-4.2 | 794A         | REV      | 15MFD/370V  | 1/2" x 5"           | 5-5/8"     | 6"       | 51-23017-41   | 42 <b>New!</b> |

- Notes:
- Item to be discontinued when stock is depleted
  - Ball bearing
  - 60/50 HZ
  - Resilient mounting rings included
  - Has hex mounting hub on both ends for cradle base mounting
  - 60°C Ambient
  - Four mounting holes in shell
  - Eight mounting holes in shell
  - TEAO
  - For additional information see page 73
  - 4 in 1 Multi-horsepower motor, replaces 1/3-1/4-1/5-1/6 HP