


## MODEL: ARI RADON FANS

ARI Radon Fans incorporate a factory sealed, durable, UV resistant plastic housing, and are designed to help mitigate radon gas from the home. They are available in 4", 5", 6", & 8" duct diameters.

DIMENSIONS IN INCHES									
MODEL	DUCT DIA.	ØA	ØB	C	D	E	F	G	SHIP WT (lbs)
ARI100-C	4"	3.9	9.8	10.6	9.1	1.2	1.1	1.2	7.0
ARI125-C	5"	4.9	9.8	10.6	8.7	1.2	1.1	1.2	7.0
ARI150-C	6"	5.9	11.8	12.2	11.3	1.2	1.2	1.2	8.0
ARI200-C	8"	7.9	13.4	13.9	10.9	1.2	1.2	1.6	9.0

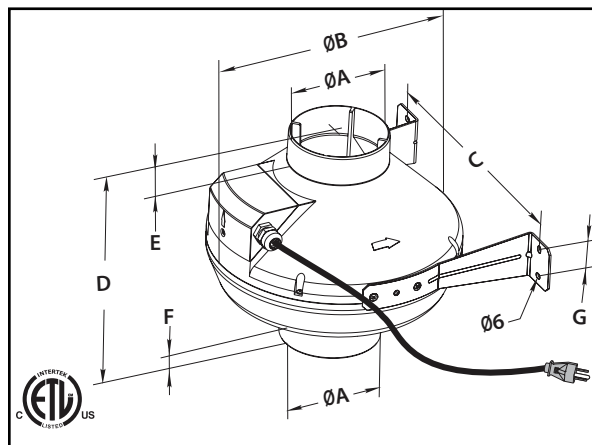

## CONSTRUCTION

- Factory sealed, water tight housing and junction box
- UV and corrosion resistant, durable plastic housing
- Suitable for air temperatures up to 122 F
- Pre-wired capacitor
- Easily accessible, external junction box
- Mounting brackets
- Backward-curved centrifugal impeller
- Precision balanced assembly

## MOTOR

- Durable "external rotor" design
- Enclosed motor housing
- Ball bearings, permanently lubricated
- 120V operation; (optional 220V; contact factory)
- IPX4 protection
- Automatic reset thermal overload protection
- Infinitely variable fan speed capability

PROJECT						ARCHITECT		
DATE						ENGINEER		
SUBMITTED BY						CONTRACTOR		
SPECIFICATION								
FAN NO.	MODEL NO.	CFM	IN. WG	VOLTS	WATTS	AMPS	QTY	OPTIONAL EQUIPMENT