
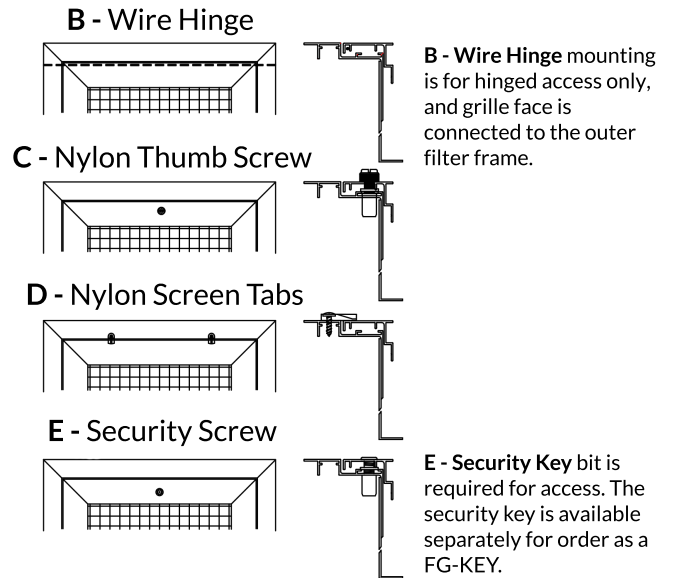


- Horizontal blades fixed on 30° deflection and 2/3" spacing.
- Aluminum roll-formed blade pressure fitted for rattle free performance.
- Aluminum extruded frame with mechanically locked corners.
- Countersunk screw holes c/w painted mounting screws.
- Mullions used for lengths over 22".
- Designed for sidewall and ceiling application.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Durable powder coat finish.

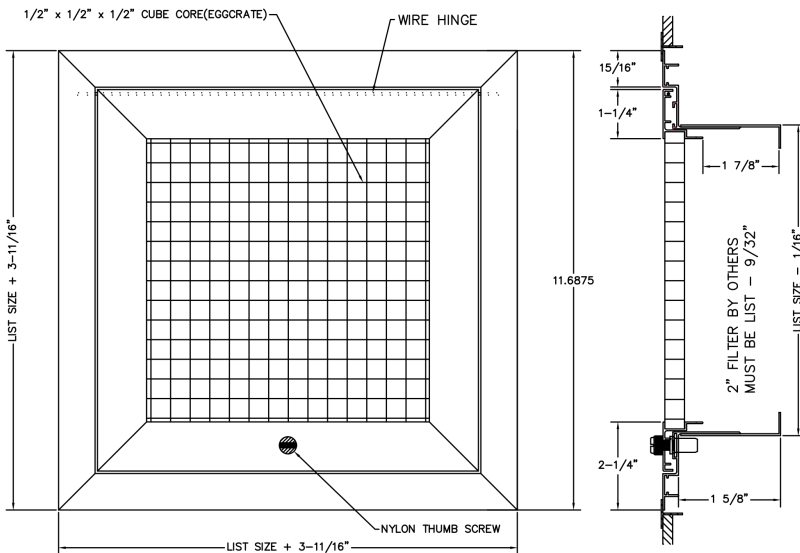

1. Select a Top Mounting Option

Optional to specify.
B - Wire Hinge is standard.

- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

2. Select a Bottom Mounting Option

Optional to specify.
C - Nylon Thumb Screw is standard.

- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

Order 4" smaller than the T-Bar opening.

e.g. a 20" x 20" DARE5-FG2-TB grille will fit a standard 2'x2' T-Bar opening.

3. Specify the Length x Height Dimensions

Inches MM _____ x _____

4. Select a Finish

- W - White
- S - Silver
- M - Mill

5. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery



Project / Location: _____
 Architect: _____
 Engineer: _____
 Contractor: _____

