


- Individually adjustable vertical blades with 2/3" spacing.
- Roll-formed aluminum blades with semi-airfoil design.
- Pressure-fit nylon pivot pins provide rattle free performance.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 18" in height.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

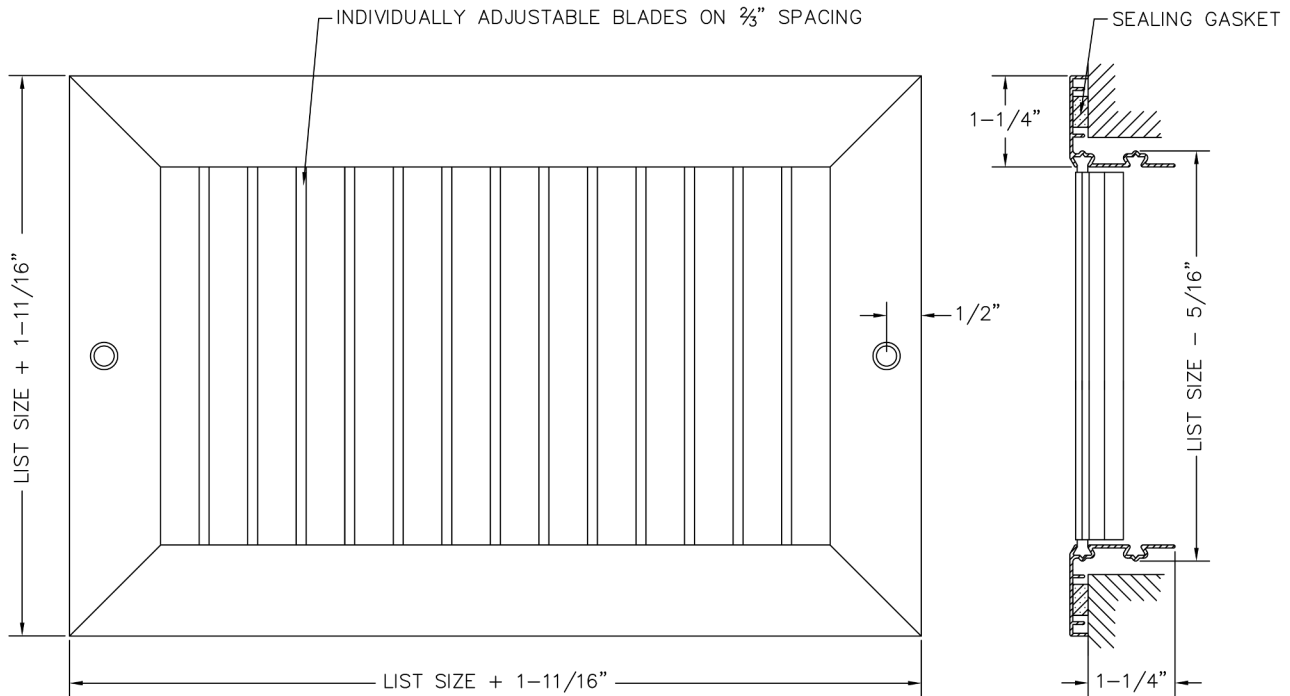

**3 DAY SHIP**  
ANY SIZE. ANY MODEL.  
GUARANTEED

**Additional Options**

- D - Opposed Blade Damper
- TB - No Screw Holes
- AA - All Aluminum

**1. Specify the Length x Height Dimensions**

Inches  MM \_\_\_\_\_ x \_\_\_\_\_

**2. Select a Finish**

- W - White
- S - Silver
- M - Mill

**3. Select a Lead Time**

- 3 Day Ship
- Next Friday
- Standard Delivery

**Project / Location:** \_\_\_\_\_

**Architect:** \_\_\_\_\_

**Engineer:** \_\_\_\_\_

**Contractor:** \_\_\_\_\_