

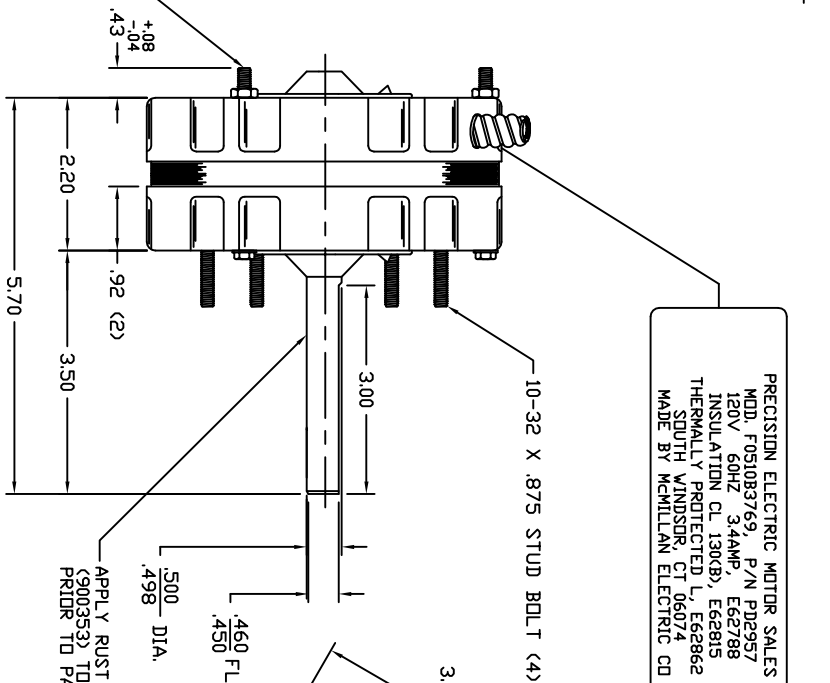


LEADWIRE:  
18-2, BONDED, 1/32, 105°C  
PLASTIC JACKET, WHT/BLK  
222746

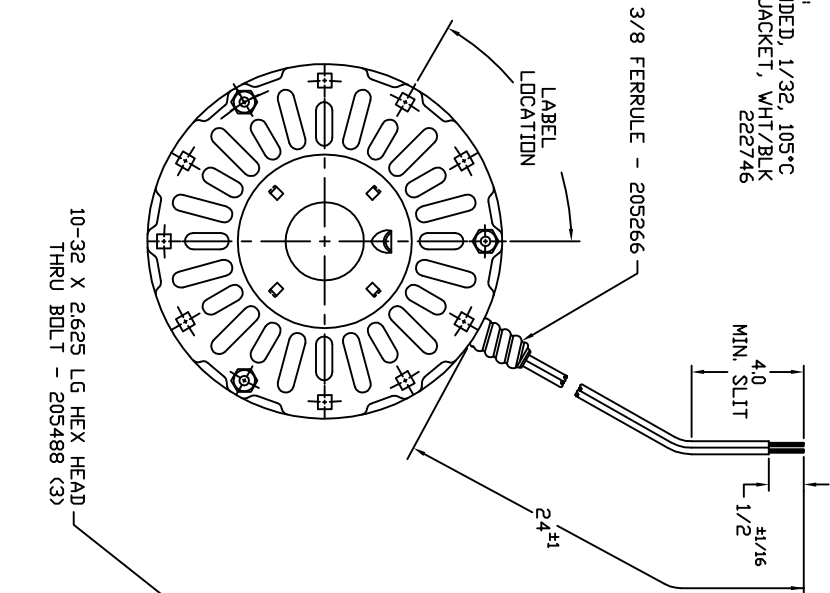

PRECISION ELECTRIC MOTOR SALES  
MOD. F0510B3769, P/N PD2957  
120V 60HZ 3.4AMP, E62788  
INSULATION CL 130CB, E62815  
THERMALLY PROTECTED L, E62862  
SOUTH WINDSOR, CT 06074  
MADE BY McMILLAN ELECTRIC CO

211245  
(LOCATE AS SHOWN)

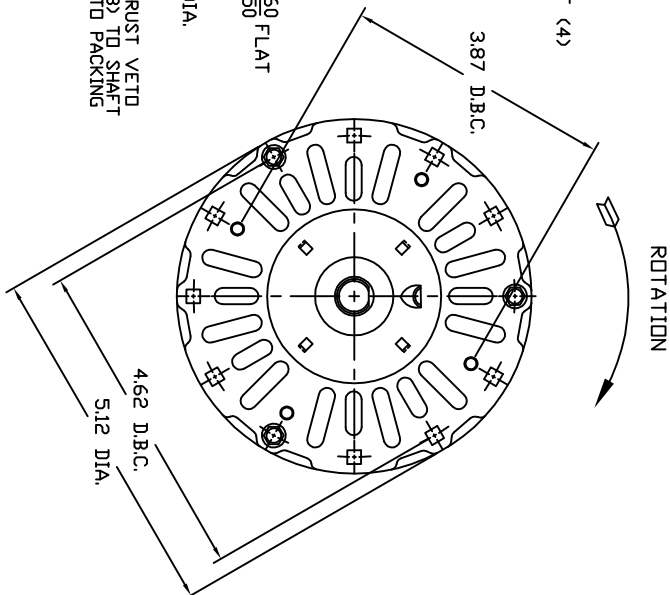

NOTICE OF CONFIDENTIAL INFORMATION  
The information contained herein is the property of Precision Electric Company. Where furnished with a product, the recipient shall use it solely for the purpose of inspection, installation or maintenance. Where the recipient is not the intended user, the recipient shall not use the information for any other purpose. The information shall not be used or disclosed by the recipient for any other purpose.

|                                                                          |
|--------------------------------------------------------------------------|
| REV. 1:<br>3.00 FLAT WAS 1.00                                            |
| REV. 2:<br>465006 (216 PACK) WAS<br>465005 (252 PACK)                    |
| REV. 3:<br>301388 WAS 300963                                             |
| REV. 4, ECD-2349:<br>211245 WAS 210582.                                  |
| REV. 5, ECD-4929:<br>UPDATE DIMENSIONS PER<br>.025 CASE HEIGHT REDUCTION |
| REV. 6, ECD-6379:<br>ADD "RUST VETO" NOTE                                |
| REV. 7, ECD-6496:<br>UPDATE LABEL DATA                                   |
| REV. 8, ECD-7484:<br>ADD "MADE BY McMILLAN."                             |

|    |          |     |
|----|----------|-----|
| 6  | 9-3-14   | PJD |
| 7  | 11-06-14 | PJD |
| 8  | 6-6-16   | PJD |
| 9  |          |     |
| 10 |          |     |
| 11 |          |     |

| REVISIONS |         |     | McMillan Electric Company                   |  |  |
|-----------|---------|-----|---------------------------------------------|--|--|
| NO.       | DATE    | BY  | 400 BEST ROAD<br>WOODVILLE, WISCONSIN 54028 |  |  |
| 1         | 5-28-08 | ACR | PEMS, 6P SHD, .625 STK, 1 SPD               |  |  |
| 2         | 6-9-08  | ACR | SCALE 1=2                                   |  |  |
| 3         | 6-10-08 | ACR | DATE 5-19-08                                |  |  |
| 4         | 7-16-08 | MLS | APPRO                                       |  |  |
| 5         | 6-29-12 | PJD | REV.                                        |  |  |

.080 MAX. ENDPLAY

10-32 X 2625 LG HEX HEAD  
THRU BOLT - 205488 (3)

LABEL  
LOCATION

3/8 FERRULE - 205266

MIN. SLIT

4.0

1 1/2

2.4 ±.1

10-32 X .875 STUD BOLT (4)

3.87 D.B.C.

ROTATION

.08  
-.04

.43

2.20

.92 (2)

3.50

5.70

3.00

.500

.498

.450

.450

.450

.450

.450

.450

.450

.450

.450

APPLY RUST VETO  
(900353) TO SHAFT  
PRIOR TO PACKING

4.62 D.B.C.

5.12 DIA.