

FLA-25TD



Key Features

- Main power disconnect switch
- Cam-lock electrical connections
- Remote thermostat with 25ft cord
- Skid mounted with 4-way fork pockets
- Stackable for storage
- 2 - 20" Supply duct collars with clamps
- 2 - 20" Return duct collars with clamps




Specifications

Cooling Capacity	300,000 BTU/Hr.
Heating Capacity	72Kw
CFM	10,000
Power Requirement	460V/3Ph.
Cooling MOP	70 Amps
Heating MOP	120 Amps
E.S.P	1.5" W.C.
Weight	3200LBS

TEMPORARY CLIMATE SOLUTIONS



FLA- 25TD

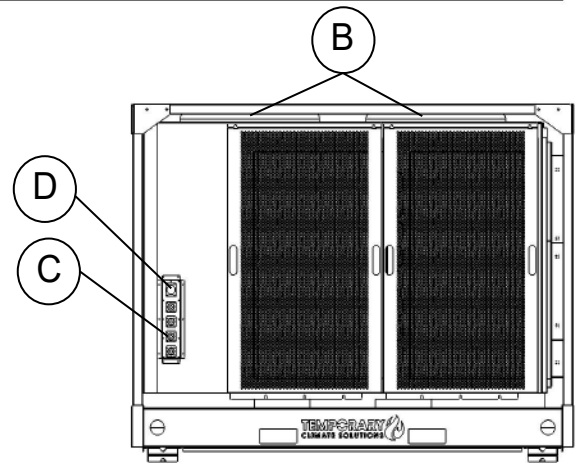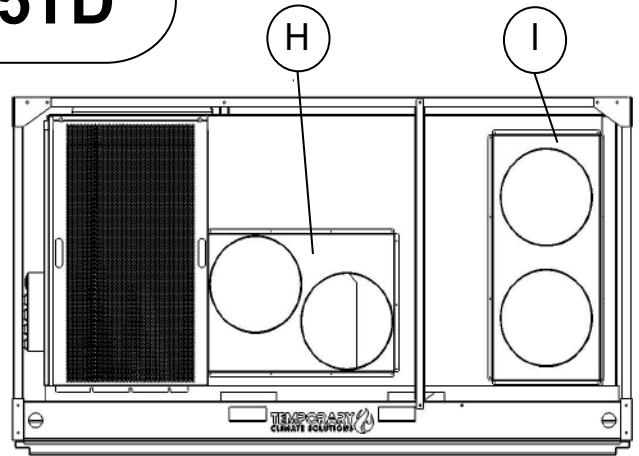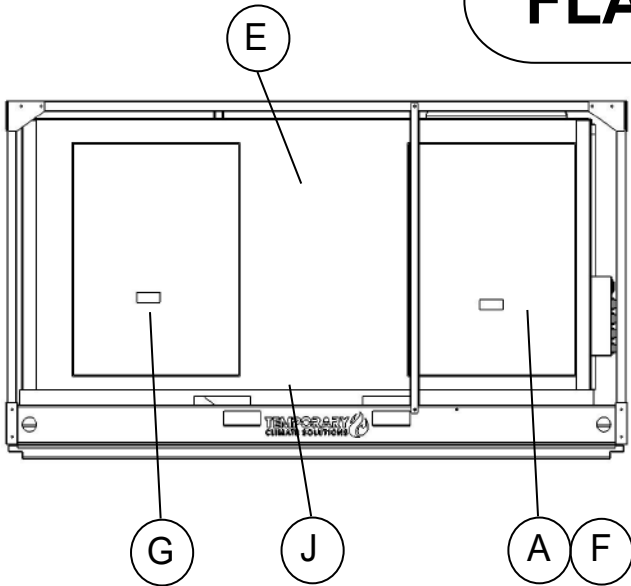

SPECIFICATIONS:

OPERATING VOLTAGE: 460V/ 3PH
(230V/3PH AVAILABLE UPON REQUEST)

MODE:

COOL ONLY MOP: 70 AMPS
HEAT ONLY MOP: 120 AMPS
AIR FLOW: 10,000 CFM
DRAIN CONNECTION: 3/4" NPT
SOUND LEVEL: 92 db

DIMENSIONS:

LENGTH X WIDTH X HEIGHT: 133" X 95" X 72.5"
WEIGHT: 3200 LBS

- A. MAIN CIRCUIT BREAKERS
- B. CONDENSER FANS
- C. CAM LOCK CONNECTORS
- D. THERMOSTAT JACK
- E. SERVICE PANEL ACCESS- BLOWER
- F. SERVICE PANEL ACCESS- ELECTRICAL
- G. SERVICE PANEL ACCESS- FILTER
- H. SUPPLY AIR- 2 X 20"
- I. RETURN AIR- 2 X 20"
- J. CONDENSATE DRAIN CONNECTION