




# Model 2730C

## Direct Fired Heater

- CSA Certified
- Can be utilized as a make-up air heater
- Ductable up to 200 feet
- Flame safeguard control provides safe monitoring of combustion, two trial electronic ignition with 20 second pre-purge time delay and 7 second shutdown
- Fused disconnect switch permits easy, safe 100% power shut-off
- Hi limit switch protects heater by shutting down if unit is being overfired
- Motor overload/manual reset protects heater by shutting down if voltage is too low
- Remote thermostat automatically cycles the heater high - low to maintain room temperature

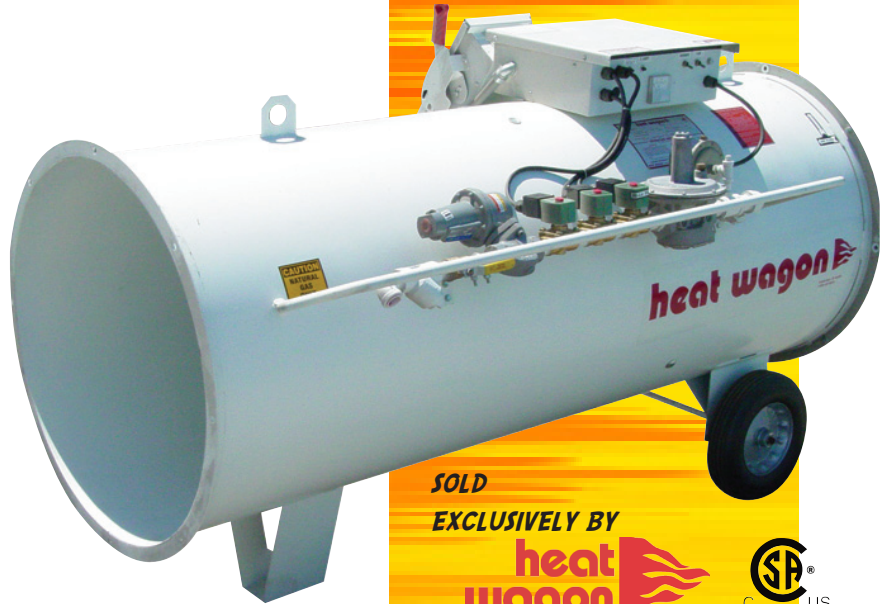

SOLD

EXCLUSIVELY BY



### SPECIFICATIONS

Input	2,000,000 BTU/Hr		
Fuel	Vapor & Liquid Propane/Natural Gas		
Gas Consumption	21.9 GPH Propane/2000 CFH NG		
Gas Connection	3/4" FNPT - NG/Vapor Propane 1/2" FNPT - Liquid Propane		
Electrical	208-240V 1Ø, 19 Amp 208-240V 3Ø, 15 Amp 480V 3Ø, 7 Amp		
Fan	12,500 CFM 3.0 HP, 2.0" S.P.		
Thermostat	High - Low		
Duct (optional)	WD3025HT		
Temp Rise	257°F		
Dimensions	72"L x 32"W x 46"H		

### MODEL CHART

Model	Fuel	Power
2730C1	Natural Gas	1Ø 240V
2730C2	Natural Gas	3Ø 240V
2730C3	Natural Gas	3Ø 480V
2730C4	Propane	1Ø 240V
2730C5	Propane	3Ø 240V
2730C6	Propane	3Ø 480V
2730C7	Liquid Propane	1Ø 240V
2730C8	Liquid Propane	3Ø 240V
2730C9	Liquid Propane	3Ø 480V

Gas Supply:	Inlet Pressure		Manifold Pressure
	Max PSI	Min PSI	W.C.
Vapor Propane	250	5	1"
Natural	250	5	2.5"

For lower pressures consult Heat Wagon Tech Service



342 N. 400 E. Valparaiso, IN 46383

219-464-8818 • 219-462-7985 • [www.heatwagon.com](http://www.heatwagon.com)