

JD26 PLUS


8 Stage Ventilation Control

Features

- Input Capabilities:
 - Up to 4 inside temperature sensors
 - 1 outside temperature sensor
 - 1 humidity sensor
 - 2 potentiometer inputs
- Outputs:
 - 2 independent variable stages (12 FLA)
 - 6 relay stages (12 FLA)
 - 1 alarm relay
- Easy-to-use navigation buttons
- Two line x 24 character screen
- Eight hot keys for quick access
- Indicator status lights for outputs
- Fahrenheit or Celsius display
- Adjustable motor curves
- Fully configurable relay stages (12 FLA):
 - Heat
 - Cool
 - Duty cycles
 - Curtains
 - Actuator controls
- Manual override
- Password security to prevent unauthorized setting changes
- Adjustable open/close and idle durations (1-900 seconds)
- Adjustable high/low temperature alert settings
- Includes one standard 30' temperature sensor (*can be extended up to 500' with purchase of additional wire*)
- Ambient temperature range 32° to 113°F (0° to 45°C)
- Rugged and sealed enclosure

Part#	Description	Volts	Hz	Amps
JD26PLUS	Control, 8* Stage Ventilation Control	115/230	50/60	12 FLA
Accessories				
JDM010	External module, 2 outputs, 0-10V each, 20MA, 230V			
JDR3-5	Remote Power Supply, (3) 24 VDC Motors, 500W, 115/230V			
JDR3-5-480	Remote Power Supply, (3) 24 VDC Motors, 500W, 480V			
JDMM4	Removable Memory Device			
JDMM4U	Removable Memory Device, Plus Programmer & USB			
JDNETIN2	PC Communication Board			
JD200410K	Temperature Probe, with 1' wire			
JD200410K-10	Temperature Probe, with 10' wire			
JD200410K-30	Temperature Probe, with 30' wire			
JD200410K-75	Temperature Probe, with 75' wire			
JDRH1	Humidity Sensor, 15' Cable			

* A maximum of (1) JDM010 External Modules may be added to a JD26PLUS control increasing your number of 0-10V Variable Stages by 2.

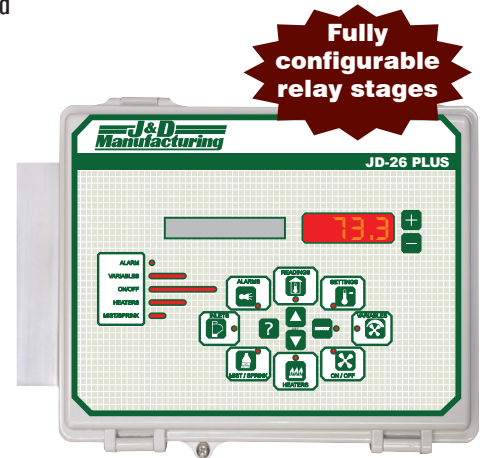

ENVIRONMENTAL CONTROLS

JDN2

Natural Ventilation Control

The JDN2 is a microprocessor based control designed to effectively operate a curtain or other inlet machine.

Features

- Input capabilities:
 - 1 inside temperature sensor
- Outputs:
 - 2 relay stages to run 1 curtain or inlet stage (12 FLA)
 - 1 alarm relay
- 5 character LED display and status LEDs
- Fahrenheit or Celsius display
- Manual override
- Password security to prevent unauthorized setting changes
- Adjustable open/close and idle durations (1-900 seconds)
- Adjustable high/low temperature alert settings
- Temperature range 32 - 113°F (0 - 45°C)
- Rugged and sealed enclosure
- Includes one standard 30' temperature sensor (*can be extended up to 500' with purchase of additional wire*)

Part#	Description	Volts	Hz	Amps	Stages
JDN2	Natural Ventilation Control	115/230	50/60	12 FLA	2
Accessories					
JDMM4	Removable Memory Device				
JDMM4U	Removable Memory Device, Plus Programmer & USB				
JD200410K	Temperature Probe, with 1' wire				
JD200410K-10	Temperature Probe, with 10' wire				
JD200410K-30	Temperature Probe, with 30' wire				
JD200410K-75	Temperature Probe, with 75' wire				

