



# PRODUCT CATALOG

PLUMBING | HEATING | BALANCING | PROPANE | COMMERCIAL | INDUSTRIAL | RESIDENTIAL







## PRODUCT CATALOG

---

7243 MILLER DRIVE  
WARREN, MI 48092

586.268.1220  
CSR@JOMAR.COM

JOMARVALVE.COM

---



LINKEDIN.COM/COMPANY/  
JOMARVALVE



@JOMAR\_VALVE



YOUTUBE.COM/  
@JOMARVALVE

---



## INNOVATIVE VALVE SOLUTIONS SINCE 1966

Founded by former Navy Commander Joseph Martin in 1966, and headquartered in Warren, MI, Jomar Valve is a recognized leader in the valve industry, offering innovative solutions for plumbing, HVAC, natural gas, industrial, and actuation applications. Our products carry the most certifications of any valve on the market, and we are committed to continuous growth and improvement.

At Jomar, we are proud to say our company culture is built around our customers' needs. Our dedicated team of professionals, with decades of industry experience, hold a wealth of knowledge and provide customized care and technical solutions every day.

Our production capabilities and strategically placed stocking warehouses across North America enable us to provide industry-leading lead times, fill rates, and local delivery for thousands of SKUs.

Investments in technology, software, and resources - including an e-commerce portal, and hundreds of downloadable BIM and CAD files for our engineering specifications community - make partnering with Jomar convenient.

Today, Jomar Valve is under the ownership of Fratelli Pettinaroli, a third-generation, family-operated ISO 9001 Italian manufacturer with a global presence spanning across more than 60 countries.


United by a shared passion to develop dynamic, high-quality valve solutions to meet the demands of any project, and an unwavering commitment to innovation and excellence, Pettinaroli and Jomar Valve continue to blaze forward together, redefining and elevating the standards of quality products and superior customer care.



JOMAR VALVE HEADQUARTERS, WARREN, MI



PETTINAROLI HEADQUARTERS, NORTHERN ITALY

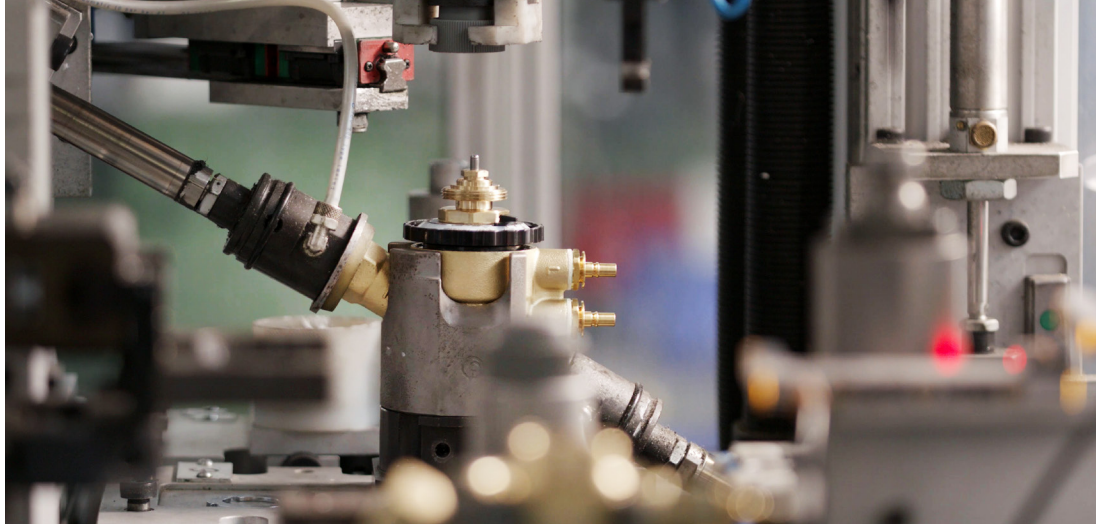

---

VISIT OUR WEBSITE  
TO LEARN MORE





SCAN CODE ON PRODUCT PAGES TO VIEW SPECIFICATIONS

**9 BALL VALVES**

**LEAD FREE BRONZE BALL VALVES**

T-200CSSG ..... 10  
 S-200CSSG ..... 10  
 T-200CSSG-LH ..... 10  
 S-200CSSG-LH ..... 11  
 T-200CSSG-IH ..... 11  
 S-200CSSG-IH ..... 11

**LEAD FREE BRASS BALL VALVES**

T-100CG ..... 12  
 S-100CG ..... 12  
 T-100CG-LH ..... 12  
 S-100CG-LH ..... 13  
 T-100CG-IH ..... 13  
 S-100CG-IH ..... 13  
 T-100CSSG ..... 14  
 S-100CSSG ..... 14  
 T-100CSSG-LH ..... 14  
 S-100CSSG-LH ..... 15  
 T-100CSSG-IH ..... 15  
 S-100CSSG-IH ..... 15  
 JP-100G ..... 16  
 JP-100G-LH ..... 17  
 JP-100G-IH ..... 17  
 JP-100G XLC ..... 17  
 JP-100SSG ..... 18  
 JP-100SSG XLC ..... 18  
 JP-100SSG-LH ..... 18  
 JP-100SSG-IH ..... 19  
 T-100UEG ..... 19  
 T-100HCG ..... 19  
 JP-100HCG ..... 20  
 T-100FBG ..... 20  
 TWV-3W-KIT-G ..... 20  
 TWV-3W-KIT-G-1 ..... 21  
 TWV-3W-KIT-G SharkBite™ ..... 21  
 TWV-3W-KIT-G W/O RV PORT ..... 21  
 JF-100TG ..... 22  
 JF-100SG ..... 22  
 JF-100TG-LH ..... 22  
 JF-100SG-LH ..... 23  
 JP-150G ..... 23  
 JP-150G XLC ..... 23  
 JP-150G Press x FIP ..... 23  
 JP-150G Press x MIP ..... 24  
 T-150G ..... 24  
 S-150G ..... 24  
 T-110G ..... 25  
 S-110G ..... 25  
 JP-110G ..... 25  
 C-402G ..... 25  
 JF-100RVG NPT ..... 26  
 JF-100RVG SWT ..... 27  
 JF-100RVG Crimp Pex ..... 27  
 JF-100RVG Expansion Pex ..... 27  
 JF-100RVG CPVC ..... 28  
 T-422G ..... 28  
 S-422G ..... 28  
 T-422G MIP x Expansion ..... 29  
 T-422G FIP x Expansion ..... 29  
 T-422G Press x Expansion ..... 29  
 T-423G ..... 30  
 T-412G ..... 30  
 S-412G ..... 30  
 T-412G MIP x Crimp ..... 31  
 T-412G FIP x Crimp ..... 31  
 T-412G Press x Crimp ..... 31  
 T-413G ..... 32  
 S-155G ..... 32  
 S-165G ..... 32  
 JF-100GMxF ..... 33

T-82MG ..... 33  
 T-83CG ..... 33  
 JFPG-100 ..... 34  
 T-100HFG ..... 34  
 S-100HSG ..... 34  
 P-100HPG ..... 35  
 Lead Free Add-a-Valve ..... 35

**BRONZE BALL VALVES**

T-200CSS ..... 36  
 S-200CSS ..... 36  
 T-200CSS-LH ..... 36  
 S-200CSS-LH ..... 37  
 T-200CSS-IH ..... 37  
 S-200CSS-IH ..... 37

**BRASS BALL VALVES**

T-100NE ..... 38  
 S-100NE ..... 39  
 T-100NE-LH ..... 39  
 T-100NE-IH ..... 39  
 T-100NE-OH ..... 39  
 T-100SSE ..... 40  
 T-100SSS ..... 40  
 T-100FMN ..... 40  
 T-100UE ..... 41  
 T-100STN ..... 41  
 JP-100 ..... 41  
 JP-100 XLC ..... 42  
 S-100-DUE ..... 42  
 T-82-M ..... 42  
 T-84-M ..... 43  
 T-84-EH ..... 43  
 T-83C ..... 43  
 JF-100T ..... 44  
 JF-100S ..... 44  
 JF-100T-LH ..... 45  
 JF-100S-LH ..... 45  
 JF-100TFM ..... 45  
 JF-100TS ..... 46

**MEDICAL GAS BALL VALVES**

S-650-CE-4B ..... 47  
 S-675-DGP-4B ..... 47  
 S-675-DGP-4B-SS ..... 47  
 Repair Kit ..... 47

**GAS BALL VALVES**

T-204 ..... 48  
 T-204DU ..... 48  
 T-203 ..... 49  
 T-203DU ..... 49  
 T-205 ..... 49  
 T-2005C ..... 50  
 T-2004C ..... 50

**CARBON STEEL BALL VALVES**

T-CS-1001N-SS ..... 51  
 T-CS-2000N-SS ..... 51  
 T-CS-1000N-SS-4B ..... 51  
 S-CS-1000N-SS-4B ..... 52  
 T-CS-2001N-SS-4B ..... 52  
 S-CS-2001N-SS-4B ..... 52  
 T-CS-2002N-SS-DUE ..... 53  
 S-CS-2002N-SS-DUE ..... 53  
 FL-CS-100-150 ..... 54  
 FL-CS-100-300 ..... 54

**STAINLESS STEEL BALL VALVES**

T-SS-1001N ..... 55  
 T-SS-2000N ..... 55  
 T-SS-2000N-FP ..... 55  
 T-SS-2000N-MF ..... 56  
 T-SS-2000N-DH ..... 56

T-SS-1050N-3L ..... 56  
 T-SS-900N ..... 56  
 T-SS-1000N-4B ..... 57  
 S-SS-1000N-4B ..... 58  
 TS-SS-1000N-4B ..... 58  
 T-SS-2001N-4B ..... 58  
 S-SS-2001N-4B ..... 59  
 T-SS-2002N-DUE ..... 59  
 S-SS-2002N-DUE ..... 59  
 T-SS-1000 ..... 59  
 FL-SS-100-150 ..... 60  
 FL-SS-100-300 ..... 60

**CARBON & STAINLESS STEEL REPAIR KITS**

Repair Kits ..... 61

**63 BALANCING VALVES**

**DOMESTIC HOT WATER BALANCING VALVES**

TB-120G ..... 64  
 TB-130G ..... 64  
 TB-150G ..... 65  
 TB-120MG ..... 66  
 TB-130MG ..... 66  
 TB-150MG ..... 67  
 TB-120MFG ..... 68  
 TB-130MFG ..... 68  
 TB-150MFG ..... 69  
 Tail Piece Check Valve ..... 70  
 Union Ball Valve ..... 70  
 Filter Ball® Strainer ..... 70  
 N.C. Thermolectric Actuator 24V ..... 70  
 Thermowell and Probe ..... 70  
 Double Scale Thermometer ..... 70

**MECHANICAL BALANCING VALVES**

TBG - FNPT ..... 71  
 TGG - FNPT ..... 71  
 TGG - SWT ..... 71  
 TAF ..... 72  
 TRAA-BFF-Q ..... 72  
 TRAB-BFF-Q ..... 72  
 TB - FNPT ..... 73  
 TB - SWT ..... 73  
 TG - FNPT ..... 73  
 TG - SWT ..... 74  
 TG - Flanged ..... 74  
 TG - Grooved ..... 74

**75 BUTTERFLY VALVES**

**RESILIENT SEATED BUTTERFLY VALVES**

BFV-Lug ..... 76  
 BFV-Wafer ..... 76  
 Lever Handle ..... 77  
 Gear Operator ..... 77

**HIGH PERFORMANCE BUTTERFLY VALVES**

HPBFV Carbon Steel 150 Class ..... 78  
 HPBFV Stainless Steel 150 Class ..... 78  
 HPBFV Carbon Steel 300 Class ..... 79  
 HPBFV Stainless Steel 300 Class ..... 80  
 HPBFV Lever Handle ..... 80  
 HPBFV Lever Handle ..... 80  
 HPBFV Gear Operator ..... 81

**83 GATES, CHECKS & STRAINERS**

**LEAD FREE BRONZE GATE VALVES**  
 T-351G ..... 84  
 S-351G ..... 84

**LEAD FREE BRASS GATE VALVES**  
 T-301G ..... 85  
 S-301G ..... 85

**BRASS GATE VALVES**  
 T-301 ..... 86  
 S-301 ..... 86

**CAST IRON GATE VALVES**  
 F-351 ..... 87  
 F-361 ..... 87

**LEAD FREE BRONZE CHECK VALVES**  
 T-511G ..... 88  
 S-511G ..... 88

**LEAD FREE BRASS CHECK VALVES**  
 T-521G ..... 89  
 S-521G ..... 89  
 P-521G ..... 89  
 E-521G ..... 89  
 T-501G ..... 90  
 S-501G ..... 90  
 P-501G ..... 90

**BRONZE CHECK VALVES**  
 T-511 ..... 91  
 S-511 ..... 91

**BRASS CHECK VALVES**  
 T-501 ..... 92  
 S-501 ..... 92  
 T-550 ..... 92

**CAST IRON CHECK VALVES**  
 F-571 ..... 93  
 F-591 ..... 93

**LEAD FREE BRONZE STRAINER VALVES**  
 T-651G ..... 94  
 S-651G ..... 94

**CAST IRON STRAINER VALVES**  
 F-651 ..... 95

**97 ACTUATION**

**ELECTRIC ACTUATORS**  
 AE Series ..... 98

**PNEUMATIC ACTUATORS**  
 JV Series ..... 99

**DIRECT MOUNT BALL VALVES**  
 A101 ..... 100  
 A-751T/L ..... 100  
 Mounting Bracket ..... 100  
 A1000 ..... 101  
 A1001 ..... 101  
 A2020D ..... 101  
 A-850T/L ..... 102  
 A-766T/L ..... 102

**ACTUATION ACCESSORIES**  
 ASV ..... 103  
 ASM ..... 103  
 AEP ..... 103  
 APP ..... 104

**105 CPVC/PVC VALVES**

**LEAD FREE BRASS CPVC/PVC BALL VALVES**  
 S-155G ..... 106  
 S-165G ..... 106

**CPVC/PVC BALL VALVES**  
 S-605 ..... 107  
 T/S-703 ..... 107  
 T-701 ..... 107  
 S-701 ..... 108  
 T-702 ..... 108  
 S-702 ..... 108

**109 LOCKWINGS**

175-LWN ..... 110  
 175-LWIN ..... 110  
 125-LWN ..... 111

**113 DIELECTRIC UNIONS**

**LEAD FREE DIELECTRIC UNIONS**  
 Dielectric Unions ..... 114-115

**BRASS DIELECTRIC UNIONS**  
 Dielectric Unions ..... 116  
 Liquid Propane Dielectric Union ..... 116

**117 LOW PRESSURE**

**LEAD FREE BRASS BOILER DRAINS**  
 T-621G ..... 118  
 T-622G ..... 118  
 T-624G ..... 118

**BRASS BOILER DRAINS**  
 T-621 ..... 119

**LEAD FREE BRASS SILLCOCKS**  
 T-641G ..... 120  
 S-641G ..... 120

**LEAD FREE BRASS HOSE BIBBS**  
 T-632G ..... 121  
 T-632NKG ..... 121

**LEAD FREE BRASS VACUUM BREAKERS**  
 T-653G ..... 122

**123 BASKET STRAINER**

**DESIGNER SERIES**  
 Snap-N-Loc® ..... 124  
 Twist-N-Loc® ..... 124  
 Easy-Loc® ..... 124  
 Mag-Na-Loc™ ..... 124  
 Snap-N-Seal® ..... 125  
 Snap-Tite™ ..... 125  
 Push-N-Seal II™ ..... 125  
 Small Wonder™ ..... 125  
 Bar-ette™ ..... 126  
 Accessories ..... 126

**BUILDER SERIES**  
 Disposer with Stopper ..... 127  
 Economy Strainer ..... 127  
 Basic Deep Cup Sink Strainer ..... 127

**129 THREAD SEALANT**

White Stuff ..... 130  
 Green Stuff ..... 130  
 Heavyweight ..... 130  
 WOG Plus ..... 131  
 Copper Anti-Seize ..... 131  
 Nickel Anti-Seize ..... 131

**133 ACCESSORIES**

Lever Handles ..... 134  
 Locking Handles ..... 135-136  
 T-Handles ..... 136-137  
 Long Neck T-Handle ..... 137  
 Wingtip Handle ..... 137  
 Oval Handles ..... 137-138  
 Extended Handle ..... 138  
 Thermal-Block™ Insulated Handles ..... 138  
 Slo-Ball Handle ..... 139  
 Memory Stop ..... 139  
 Square Head Top ..... 139  
 Stem Extensions ..... 140  
 Filter Ball® Replacement Filters ..... 141

Part Number Index ..... 142-151  
 Terms & Conditions ..... 152  
 Warranty ..... 153  
 Competitor Cross Reference ..... 154-155  
 Stocking Warehouse ..... 156







# BALL VALVES



## T-200CSSG

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 600 CWP



PART NUMBER	SIZE
200-401SSG	1/4"
200-402SSG	3/8"
200-403SSG	1/2"
200-404SSG	3/4"
200-405SSG	1"
200-406SSG	1-1/4"
200-407SSG	1-1/2"
200-408SSG	2"
200-409SSG	2-1/2"
200-410SSG	3"

- Dezincification Resistant Lead Free Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- NSF 61 & NSF 372 & NSF 14 Certified
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



## S-200CSSG

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, 600 CWP



PART NUMBER	SIZE
200-413SSG	1/2"
200-414SSG	3/4"
200-415SSG	1"
200-416SSG	1-1/4"
200-417SSG	1-1/2"
200-418SSG	2"
200-419SSG	2-1/2"
200-420SSG	3"

- Dezincification Resistant Lead Free Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- NSF 61 & NSF 372 & NSF 14 Certified
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



## T-200CSSG-LH

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Locking Handle, 600 CWP



PART NUMBER	SIZE
200-401SSG-LH	1/4"
200-402SSG-LH	3/8"
200-403SSG-LH	1/2"
200-404SSG-LH	3/4"
200-405SSG-LH	1"
200-406SSG-LH	1-1/4"
200-407SSG-LH	1-1/2"
200-408SSG-LH	2"
200-409SSG-LH	2-1/2"
200-410SSG-LH	3"

- Dezincification Resistant Lead Free Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- NSF 61 & NSF 372 & NSF 14 Certified
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



### S-200CSSG-LH

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, Locking Handle, 600 CWP



PART NUMBER	SIZE
200-413SSG-LH	1/2"
200-414SSG-LH	3/4"
200-415SSG-LH	1"
200-416SSG-LH	1-1/4"
200-417SSG-LH	1-1/2"
200-418SSG-LH	2"
200-419SSG-LH	2-1/2"
200-420SSG-LH	3"

- Dezincification Resistant Lead Free Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- NSF 61 & NSF 372 & NSF 14 Certified
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



### T-200CSSG-IH

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, Insulated Handle, 600 CWP



PART NUMBER	SIZE
200-401SSG-IH	1/4"
200-402SSG-IH	3/8"
200-403SSG-IH	1/2"
200-404SSG-IH	3/4"
200-405SSG-IH	1"
200-406SSG-IH	1-1/4"
200-407SSG-IH	1-1/2"
200-408SSG-IH	2"
200-409SSG-IH	2-1/2"
200-410SSG-IH	3"

- Dezincification Resistant Lead Free Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- NSF 61 & NSF 372 & NSF 14 Certified
- UL 2043 Certified Handle
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



### S-200CSSG-IH

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Insulated Handle, 600 CWP



PART NUMBER	SIZE
200-413SSG-IH	1/2"
200-414SSG-IH	3/4"
200-415SSG-IH	1"
200-416SSG-IH	1-1/4"
200-417SSG-IH	1-1/2"
200-418SSG-IH	2"
200-419SSG-IH	2-1/2"
200-420SSG-IH	3"

- Dezincification Resistant Lead Free Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- NSF 61 & NSF 372 & NSF 14 Certified
- UL 2043 Certified Handle
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content

# LEAD FREE BRASS BALL VALVES



## T-100CG

2 Piece, Full Port, Threaded Connection, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-403G	1/2"	120	12	55
100-404G	3/4"	72	12	56
100-405G	1"	36	6	45
100-406G	1-1/4"	24	4	47
100-407G	1-1/2"	16	2	51
100-408G	2"	12	2	58
100-409G	2-1/2"	2	1	20
100-410G	3"	2	1	28
100-411G	4"	2	1	46

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



## S-100CG

2 Piece, Full Port, Solder Connection, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-413G	1/2"	120	12	53
100-414G	3/4"	72	12	57
100-415G	1"	36	6	49
100-416G	1-1/4"	24	4	48
100-417G	1-1/2"	16	2	52
100-418G	2"	12	2	63
100-419G	2-1/2"	2	1	17
100-420G	3"	2	1	25
100-421G	4"	1	1	24

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



## T-100CG-LH

2 Piece, Full Port, Threaded Connection, Locking Handle, 600 WOG

PART NUMBER	SIZE
100-403G-LH	1/2"
100-404G-LH	3/4"
100-405G-LH	1"
100-406G-LH	1-1/4"
100-407G-LH	1-1/2"
100-408G-LH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content





**S-100CG-LH**

2 Piece, Full Port, Solder Connection, Locking Handle, 600 WOG

PART NUMBER	SIZE
100-413G-LH	1/2"
100-414G-LH	3/4"
100-415G-LH	1"
100-416G-LH	1-1/4"
100-417G-LH	1-1/2"
100-418G-LH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



**T-100CG-IH**

2 Piece, Full Port, Threaded Connection, Insulated Handle, 600 WOG

PART NUMBER	SIZE
100-403G-IH	1/2"
100-404G-IH	3/4"
100-405G-IH	1"
100-406G-IH	1-1/4"
100-407G-IH	1-1/2"
100-408G-IH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- UL-2043 Certified Handle
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



**S-100CG-IH**

2 Piece, Full Port, Solder Connection, Insulated Handle, 600 WOG

PART NUMBER	SIZE
100-413G-IH	1/2"
100-414G-IH	3/4"
100-415G-IH	1"
100-416G-IH	1-1/4"
100-417G-IH	1-1/2"
100-418G-IH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- UL-2043 Certified Handle
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content





## T-100CSSG

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-403SSG	1/2"	120	10	54
100-404SSG	3/4"	72	12	55
100-405SSG	1"	36	6	45
100-406SSG	1-1/4"	24	4	47
100-407SSG	1-1/2"	16	2	51
100-408SSG	2"	12	2	58

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



## S-100CSSG

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-413SSG	1/2"	120	12	51
100-414SSG	3/4"	72	12	57
100-415SSG	1"	36	6	47
100-416SSG	1-1/4"	24	4	47
100-417SSG	1-1/2"	16	2	53
100-418SSG	2"	12	2	63

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



## T-100CSSG-LH

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Locking Handle, 600 WOG

PART NUMBER	SIZE
100-403SSG-LH	1/2"
100-404SSG-LH	3/4"
100-405SSG-LH	1"
100-406SSG-LH	1-1/4"
100-407SSG-LH	1-1/2"
100-408SSG-LH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content





### S-100CSSG-LH

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, Locking Handle, 600 WOG

PART NUMBER	SIZE
100-413SSG-LH	1/2"
100-414SSG-LH	3/4"
100-415SSG-LH	1"
100-416SSG-LH	1-1/4"
100-417SSG-LH	1-1/2"
100-418SSG-LH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



### T-100CSSG-IH

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Insulated Handle, 600 WOG

PART NUMBER	SIZE
100-403SSG-IH	1/2"
100-404SSG-IH	3/4"
100-405SSG-IH	1"
100-406SSG-IH	1-1/4"
100-407SSG-IH	1-1/2"
100-408SSG-IH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- UL-2043 Certified Handle
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



### S-100CSSG-IH

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, Insulated Handle, 600 WOG

PART NUMBER	SIZE
100-413SSG-IH	1/2"
100-414SSG-IH	3/4"
100-415SSG-IH	1"
100-416SSG-IH	1-1/4"
100-417SSG-IH	1-1/2"
100-418SSG-IH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- UL-2043 Certified Handle
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



# JP-100G



LEAK DETECTION O-RINGS



2ND GENERATION PTFE SEATS



BLOW-OUT PROOF STEM & SELF-LOCKING NUT



## JP-100G

2 Piece, Full Port, Press Connection with Leak Detection, 250 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-203G	1/2"	100	10	55
100-204G	3/4"	60	10	53
100-205G	1"	36	6	50
100-206G	1-1/4"	24	4	50
100-207G	1-1/2"	10	1	38
100-208G	2"	4	1	24

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Press Connection with Leak Detection O-Rings
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available







**JP-100G-LH**

2 Piece, Full Port, Press Connection with Leak Detection, Locking Handle, 250 WOG



PART NUMBER	SIZE
100-203G-LH	1/2"
100-204G-LH	3/4"
100-205G-LH	1"
100-206G-LH	1-1/4"
100-207G-LH	1-1/2"
100-208G-LH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Press Connection with Leak Detection O-Rings
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 20 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



**JP-100G-IH**

2 Piece, Full Port, Press Connection with Leak Detection, Insulated Handle, 250 WOG



PART NUMBER	SIZE
100-203G-IH	1/2"
100-204G-IH	3/4"
100-205G-IH	1"
100-206G-IH	1-1/4"
100-207G-IH	1-1/2"
100-208G-IH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Press Connection with Leak Detection O-Rings
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- UL 2043 Certified handle
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content



**JP-100G XLC**

2 Piece, Full Port, Press XLC Connection, 250 WOG



PART NUMBER	SIZE	CASE	WEIGHT
100-209XLCG	2-1/2"	2	18
100-210XLCG	3"	2	28
100-211XLCG	4"	1	26

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content



## JP-100SSG

2 Piece, Full Port, Press Connection with Leak Detection, Stainless Steel Trim, 250 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-203SSG	1/2"	100	10	54
100-204SSG	3/4"	60	10	52
100-205SSG	1"	36	6	50
100-206SSG	1-1/4"	24	4	51
100-207SSG	1-1/2"	10	1	39
100-208SSG	2"	4	1	24

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Press Connection with Leak Detection O-Rings
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



## JP-100SSG XLC

2 Piece, Full Port, Press XLC Connection, Stainless Steel Trim, 200 WOG

PART NUMBER	SIZE	CASE	WEIGHT
100-209XLCSSG	2-1/2"	2	18
100-210XLCSSG	3"	2	28
100-211XLCSSG	4"	1	26

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content



## JP-100SSG-LH

2 Piece, Full Port, Press Connection with Leak Detection, Stainless Steel Trim, Locking Handle, 250 WOG

PART NUMBER	SIZE
100-203SSG-LH	1/2"
100-204SSG-LH	3/4"
100-205SSG-LH	1"
100-206SSG-LH	1-1/4"
100-207SSG-LH	1-1/2"
100-208SSG-LH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Press Connection with Leak Detection O-Rings
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content





### JP-100SSG-IH

2 Piece, Full Port, Press Connection with Leak Detection, Stainless Steel Trim, Insulated Handle, 250 WOG

PART NUMBER	SIZE
100-203SSG-IH	1/2"
100-204SSG-IH	3/4"
100-205SSG-IH	1"
100-206SSG-IH	1-1/4"
100-207SSG-IH	1-1/2"
100-208SSG-IH	2"

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Press Connection with Leak Detection O-Rings
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- UL-2043 Certified Handle
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content



### T-100UEG

2 Piece, Full Port, FIP x Union FIP Connection, Single Union End, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
160-106G	1-1/4"	16	2	56
160-107G	1-1/2"	8	2	40
160-108G	2"	8	2	33

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



### T-100HCG

2 Piece, Full Port, Threaded x Hose Connection with Hose Cap, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-753G	1/2" NPT X 3/4" HOSE	100	10	46
100-754G	3/4" NPT X 3/4" HOSE	60	10	60

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Hose Connection with Strapped Cap
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content





## JP-100HCG

2 Piece, Full Port, Press x Hose Connection with Hose Cap, 250 WOG




PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-773G	1/2" PRESS X 3/4" HOSE	100	10	46
100-774G	3/4" PRESS X 3/4" HOSE	60	10	60

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Hose Connection with Strapped Cap
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content



## T-100FBG

Filter Ball® | 3-Way, Full Port, Threaded Connection with Integrated Strainer, 400 WOG

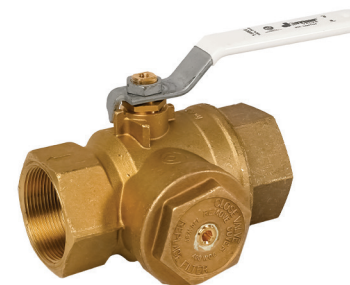

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-833G	1/2"	24	4	25
100-834G	3/4"	24	4	25
100-835G	1"	12	3	32
100-836G	1-1/4"	8	4	36
100-837G	1-1/2"	4	2	26
100-838G	2"	2	2	24

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and Teflon® Seal
- Shipped Standard with 304 SS 28 Mesh Screen  
- Available Mesh Screens: 40, 60, 80, 100
- Reversible Handle
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



## TWV-3W-KIT-G

Tankless Water Heater Valve Kit, 3-Way Ball, Threaded, Solder, or Press Connection, 600 WOG



PART NUMBER	SIZE	CASE	WEIGHT
810-504G	3/4" NPT	14	47
810-514G	3/4" SOLDER	14	48
810-524G	3/4" PRESS	12	48

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem With 2 FKM O-Rings and Teflon® Seal
- T.E.A. Coated 3-Way Ball
- 3/4" 200,000 BTU/hr Pressure Relief Valve Included
- Blow-Out Proof Stem
- US Patent No. 7,762,280 B2
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content




### TWV-3W-KIT-G-1

Tankless Water Heater Valve Kit, 3-Way Ball, Threaded Connection, 600 WOG

PART NUMBER	SIZE	CASE	WEIGHT
810-505G	1" NPT	12	48

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and Teflon® Seal
- T.E.A. Coated 3-Way Ball
- Blow-Out Proof Stem
- US Patent No. 7,762,280 B2
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content

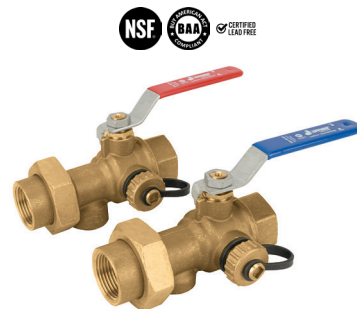

### TWV-3W-KIT-G



Tankless Water Heater Valve Kit, 3-Way Ball, SharkBite™ Connection, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
810-594G	3/4" NPT	14	14	47

- Dezincification Resistant Brass Alloy
- 3/4" 200,000 BTU/hr Pressure Relief Valve Included
- T.E.A. Coated 3-Way Ball
- Triple Sealing Stem with 2 FKM O-Rings and Teflon Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem – Lifetime Warranty
- 29 in-HG Vacuum Rating
- Wetted surfaces contain less than .25% lead content



### TWV-3W-KIT-G W/O RV PORT

Tankless Water Heater Valve Kit, 3-Way Ball, Threaded or Solder Connection, Without Pressure Relief Valve Port, 600 WOG

PART NUMBER	SIZE	CASE	WEIGHT
810-604G	3/4" NPT	40	66
810-614G	3/4" SOLDER	40	66

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and Teflon® Seal
- T.E.A. Coated 3-Way Ball
- Blow-Out Proof Stem
- US Patent No. 7,762,280 B2
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content





## JF-100TG

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-101SSG	1/4"	120	10	40
100-102SSG	3/8"	120	10	40
100-103SSG	1/2"	100	10	49
100-104SSG	3/4"	80	10	65
100-105SSG	1"	48	8	57
100-106SSG	1-1/4"	36	4	69
100-107SSG	1-1/2"	24	2	61
100-108SSG	2"	12	3	46
100-109SSG	2-1/2"	6	1	49
100-110SSG	3"	6	1	69
100-111SSG	4"	2	1	40

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



## JF-100SG

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-113SSG	1/2"	100	10	43
100-114SSG	3/4"	80	10	58
100-115SSG	1"	48	8	53
100-116SSG	1-1/4"	36	4	69
100-117SSG	1-1/2"	24	2	57
100-118SSG	2"	12	3	46
100-119SSG	2-1/2"	6	1	44
100-120SSG	3"	6	1	55
100-121SSG	4"	2	1	35

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



## JF-100TG-LH

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Locking Handle, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-101SSG-LH	1/4"	120	10	40
100-102SSG-LH	3/8"	120	10	40
100-103SSG-LH	1/2"	100	10	49
100-104SSG-LH	3/4"	80	10	65
100-105SSG-LH	1"	48	8	57
100-106SSG-LH	1-1/4"	36	4	69
100-107SSG-LH	1-1/2"	24	2	61
100-108SSG-LH	2"	12	3	46
100-109SSG-LH	2-1/2"	6	1	49
100-110SSG-LH	3"	6	1	69
100-111SSG-LH	4"	2	1	40

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 Certified
- FM Approval (1/4" - 2")
- Wetted Surfaces Contain Less than .25% Lead Content



**JF-100SG-LH**

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, Locking Handle, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-113SSG-LH	1/2"	100	10	45
100-114SSG-LH	3/4"	80	10	67
100-115SSG-LH	1"	48	8	53
100-116SSG-LH	1-1/4"	36	4	68
100-117SSG-LH	1-1/2"	24	2	62
100-118SSG-LH	2"	12	3	47
100-119SSG-LH	2-1/2"	6	1	44
100-120SSG-LH	3"	6	1	55
100-121SSG-LH	4"	2	1	35

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 Certified
- FM Approval (1/4" - 2")
- Wetted Surfaces Contain Less than .25% Lead Content



**JP-150G**

2 Piece, Full Port, Press Connection, 250 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-203G	1/2"	100	10	54
150-204G	3/4"	60	10	52
150-205G	1"	36	6	49
150-206G	1-1/4"	24	4	50
150-207G	1-1/2"	10	1	38
150-208G	2"	4	1	24

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



**JP-150G XLC**

2 Piece, Full Port, Press XLC Connection, 250 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-209XLCG	2-1/2"	4	1	24
150-210XLCG	3"	4	1	24
150-211XLCG	4"	4	1	24

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



**JP-150G Press x FIP**

2 Piece, Full Port, Press x FIP Connection, 250 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-563G	1/2"	100	10	46
150-564G	3/4"	60	10	47
150-565G	1"	40	8	34

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- IAPMO Certified - NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content





## JP-150G Press x MIP

2 Piece, Full Port, Press x MIP Connection, 250 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-573G	1/2"	100	10	30
150-574G	3/4"	60	10	34
150-575G	1"	40	6	49

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- IAPMO Certified - NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



## T-150G

2 Piece, Full Port, Threaded Connection, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-103G	1/2"	100	10	48
150-104G	3/4"	64	8	46
150-105G	1"	48	6	52
150-106G	1-1/4"	20	2	38
150-107G	1-1/2"	16	2	40
150-108G	2"	8	2	30
150-109G	2-1/2"	6	1	41
150-110G	3"	6	1	55
150-111G	4"	2	1	33

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- IAPMO Certified - NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



## S-150G

2 Piece, Full Port, Solder Connection, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-113G	1/2"	100	10	43
150-114G	3/4"	64	8	46
150-115G	1"	48	6	58
150-116G	1-1/4"	20	2	36
150-117G	1-1/2"	16	2	39
150-118G	2"	8	2	30
150-119G	2-1/2"	6	1	38
150-120G	3"	6	1	50
150-121G	4"	2	1	32

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- IAPMO Certified - NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content







**T-110G**

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim with Drain, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-633G	1/2"	120	10	51
100-634G	3/4"	80	10	47
100-635G	1"	36	6	43

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- 1/8" Drain Port
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



**S-110G**

2 Piece, Full Port, Solder Connection, Stainless Steel Trim with Drain, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-643G	1/2"	120	10	51
100-644G	3/4"	80	10	61
100-645G	1"	48	8	43

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



**JP-110G**

2 Piece, Full Port, Press Connection, Stainless Steel Trim with Drain, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-643G	1/2"	100	10	51
100-644G	3/4"	60	10	51
100-645G	1"	40	8	50

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- IAPMO Certified - NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



**C-402G**

2 Piece, Full Port, Compression Connection, Stainless Steel Trim with Drain, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
102-653G	1/2"	100	10	60
102-654G	3/4"	80	10	61
102-655G	1"	48	6	71


- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- Drain Prevents Freeze-Up
- Eliminates Seat Damage During Soldering
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content




# THERMAL EXPANSION RELIEF



MULTIPLE END CONNECTIONS

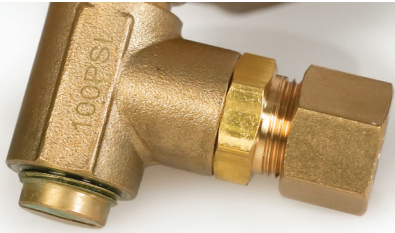

CUSTOMIZABLE FITTING



80, 100, 125 PSI FACTORY SET RELIEF POINTS



## JF-100RVG NPT

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Thermal Expansion Relief, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-080RVSSG	3/4"	12	1	16
100-100RVSSG	3/4"	12	1	16
100-125RVSSG	3/4"	12	1	16

- Dezincification Resistant Brass Alloy
- Side Discharge
- Includes Connections: 3/8" Barb, 1/2" Pex, 3/8" Compression Fittings
- Available in 80, 100, 125 PSI
- IAPMO Certified - NSF 61 & NSF 372 Certified
- IAPMO Certified - CSA B125.3 & IGC128
- ASTM F1960
- Wetted Surfaces Contain Less than .25% Lead Content



### JF-100RVG SWT

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, Thermal Expansion Relief, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
101-080RVSSG	3/4"	12	1	16
101-100RVSSG	3/4"	12	1	16
101-125RVSSG	3/4"	12	1	16

- Dezincification Resistant Brass Alloy
- Side Discharge
- Includes Connections: 3/8" Barb, 1/2" Pex, 3/8" Compression Fittings
- Available in 80, 100, 125 PSI
- IAPMO Certified - NSF 61 & NSF 372 Certified
- IAPMO Certified - CSA B125.3 & IGC128
- Wetted Surfaces Contain Less than .25% Lead Content



### JF-100RVG Crimp Pex

2 Piece, Full Port, Crimp Pex Connection, Stainless Steel Trim, Thermal Expansion Relief, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-080RVSSG	3/4"	12	1	16
103-100RVSSG	3/4"	12	1	16
103-125RVSSG	3/4"	12	1	16

- Dezincification Resistant Brass Alloy
- Side Discharge
- Includes Connections: 3/8" Barb, 1/2" Pex, 3/8" Compression Fittings
- Available in 80, 100, 125 PSI
- IAPMO Certified - NSF 61 & NSF 372 Certified
- IAPMO Certified - CSA B125.3 & IGC128
- ASTM F1807
- Wetted Surfaces Contain Less than .25% Lead Content



### JF-100RVG Expansion Pex

2 Piece, Full Port, Expansion Pex Connection, Stainless Steel Trim, Thermal Expansion Relief, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
104-080RVSSG	3/4"	12	1	16
104-100RVSSG	3/4"	12	1	16
104-125RVSSG	3/4"	12	1	16

- Dezincification Resistant Brass Alloy
- Side Discharge
- Includes Connections: 3/8" Barb, 1/2" Pex, 3/8" Compression Fittings
- Available in 80, 100, 125 PSI
- IAPMO Certified - NSF 61 & NSF 372 Certified
- IAPMO Certified - CSA B125.3 & IGC128
- Wetted Surfaces Contain Less than .25% Lead Content





## JF-100RVG CPVC

2 Piece, Full Port, CPVC Connection, Stainless Steel Trim, Thermal Expansion Relief, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-080RVSSG	3/4"	12	1	16
105-100RVSSG	3/4"	12	1	16
105-125RVSSG	3/4"	12	1	16

- Dezincification Resistant Brass Alloy
- Side Discharge
- Available in 80, 100, 125 PSI
- Wetted Surfaces Contain Less than .25% Lead Content



## T-422G

2 Piece, Standard Port, Threaded x Expansion Pex Connection, Stainless Steel Trim, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
104-523PG	1/2"	120	10	41
104-524PG	3/4"	100	10	51
104-525PG	1"	54	6	48
104-526PG	1-1/4"	36	6	49
104-527PG	1-1/2"	24	4	48
104-528PG	2"	12	2	40
104-529PG	2-1/2"	6	1	34
104-530PG	3"	6	1	61
T-HANDLE				
104-523PG-TH	1/2"	120	10	35
104-524PG-TH	3/4"	100	10	40
104-525PG-TH	1"	54	6	40

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- ASTM F1960
- Wetted Surfaces Contain Less than .25% Lead Content



## S-422G

2 Piece, Standard Port, Solder x Expansion Pex Connection, Stainless Steel Trim, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
104-533PG	1/2"	120	10	38
104-534PG	3/4"	100	10	47
104-535PG	1"	54	6	40
T-HANDLE				
104-533PG-TH	1/2"	120	10	32
104-534PG-TH	3/4"	100	10	43

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- ASTM F1960
- Wetted Surfaces Contain Less than .25% Lead Content





### T-422G MIP x Expansion

2 Piece, Standard Port, Threaded MIP x Expansion Pex Connection, Stainless Steel Trim, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
104-534MPG	3/4"	100	10	50
T-HANDLE				
104-534MPG-TH	3/4"	100	10	45

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- ASTM F1960
- Wetted Surfaces Contain Less than .25% Lead Content



### T-422G FIP x Expansion

2 Piece, Standard Port, Threaded FIP x Expansion Pex Connection, Stainless Steel Trim, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
104-554PG	3/4"	120	10	51
104-555PG	1"	54	6	48
T-HANDLE				
104-554PG-TH	3/4"	120	10	49
104-555PG-TH	1"	54	6	43

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- ASTM F1960
- Wetted Surfaces Contain Less than .25% Lead Content



### T-422G Press x Expansion

2 Piece, Standard Port, Press x Expansion Pex Connection, 250 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
104-563PG	1/2"	120	10	47
104-564PG	3/4"	100	10	47
104-565PG	1"	100	10	47

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14
- ASTM F1960
- Wetted Surfaces Contain Less than .25% Lead Content



# LEAD FREE BRASS BALL VALVES

100-101LH



## T-423G

2 Piece, Standard Port, Expansion Pex Connection, Stainless Steel Trim with Drain, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
104-543PG	1/2"	120	10	51
104-544PG	3/4"	100	10	63
104-545PG	1"	54	6	49
T-HANDLE				
104-543PG-TH	1/2"	120	10	40
104-544PG-TH	3/4"	100	10	40

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Drop Ears for Easy Installation
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- ASTM F1960
- Wetted Surfaces Contain Less than .25% Lead Content



## T-412G

2 Piece, Standard Port, Crimp Pex Connection, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
103-523PG	1/2"	120	10	35
103-524PG	3/4"	120	10	54
103-525PG	1"	54	6	35
103-526PG	1-1/4"	60	10	57
103-527PG	1-1/2"	24	4	34
103-528PG	2"	12	2	29
T-HANDLE				
103-523PG-TH	1/2"	120	10	28
103-524PG-TH	3/4"	120	10	49
103-525PG-TH	1"	54	6	33

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- ASTM F1807
- Wetted Surfaces Contain Less than .25% Lead Content



## S-412G

2 Piece, Standard Port, Solder x Crimp Pex Connection, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
103-533PG	1/2"	120	10	31
103-534PG	3/4"	120	10	54
103-535PG	1"	54	6	40
T-HANDLE				
103-533PG-TH	1/2"	120	10	25
103-534PG-TH	3/4"	120	10	49
103-535PG-TH	1"	54	6	33

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- ASTM F1807
- Wetted Surfaces Contain Less than .25% Lead Content





### T-412G MIP x Crimp

2 Piece, Standard Port, Threaded MIP x Crimp Pex Connection, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
103-534MPG	3/4"	120	10	59
T-HANDLE				
103-534MPG-TH	3/4"	120	10	54

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14
- ASTM F1807
- Wetted Surfaces Contain Less than .25% Lead Content



### T-412G FIP x Crimp

2 Piece, Standard Port, Threaded FIP x Crimp Pex Connection, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
103-554PG	3/4"	120	10	53
103-555PG	1"	54	6	43
T-HANDLE				
103-554PG-TH	3/4"	120	10	53
103-555PG-TH	1"	54	6	53

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14
- ASTM F1807
- Wetted Surfaces Contain Less than .25% Lead Content



### T-412G Press x Crimp

2 Piece, Standard Port, Press x Crimp Pex Connection, 250 CWP

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-563PG	1/2"	100	10	43
103-564PG	3/4"	60	10	41
103-565PG	1"	40	8	46

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14
- ASTM F1807
- Wetted Surfaces Contain Less than .25% Lead Content





## T-413G

2 Piece, Standard Port, Crimp Pex Connection with Drain, Stainless Steel Trim, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
103-543PG	1/2"	120	10	36
103-544PG	3/4"	120	10	53
T-HANDLE				
103-543PG-TH	1/2"	120	10	36
103-544PG-TH	3/4"	120	10	36

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14
- ASTM F1807
- Wetted Surfaces Contain Less than .25% Lead Content



## S-155G

CPVC, 2 Piece, Full Port, Solvent Connection, 150 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-603G	1/2"	54	6	29
150-604G	3/4"	48	4	40
150-605G	1"	18	2	26
150-606G	1-1/4"	-	-	-
150-607G	1-1/2"	-	-	-
150-608G	2"	-	-	-

- Dezincification Resistant Brass Alloy
- CTS Connection
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- For Hot/Cold Water Systems
- Quarter-Turn Operation
- CPVC End Connection Inserts



## S-165G

CPVC, 2 Piece, Full Port, Solvent Connection with Drain, 150 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-663G	1/2"	54	6	31
150-664G	3/4"	48	4	41
150-665G	1"	18	2	26

- Dezincification Resistant Brass Alloy
- CTS Connection
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- For Hot/Cold Water Systems
- Drain Tap 1/8" Orifice
- Quarter-Turn Operation
- CPVC End Connection Inserts







### JF-100GMxF

2 Piece, Full Port, MIP x FIP Connection, Stainless Steel Trim, 600 WOG




PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-131G	1/4"	120	10	60
100-132G	3/8"	120	10	60
100-133G	1/2"	100	10	50
100-134G	3/4"	80	10	60
100-135G	1"	48	8	58

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14
- Wetted Surfaces Contain Less than .25% Lead Content



### T-82MG

Mini Valve, 2 Piece, Full Port, Threaded Connection with Screwdriver Slot, 600 WOG

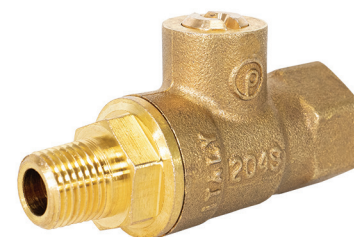


PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-296G	1/4" FIP X 1/8" MIP	350	35	58

- Dezincification Resistant Brass Alloy
- 2 FKM O-Rings
- Greater Flow Rate
- Large Raised Wrench Flats
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less than .25% Lead Content



### T-83CG

Mini Valves, 2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 600 WOG

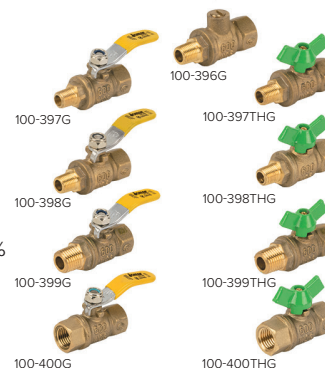

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
SCREWDRIVER SLOT				
100-396G	1/8" FIP X 1/4" MIP	250	25	40
LEVER HANDLE				
100-397G	1/8" FIP X 1/8" MIP	250	25	40
100-398G	1/4" FIP X 1/8" MIP	200	20	49
100-399G	1/4" FIP X 1/4" MIP	250	25	43
100-400G	1/4" FIP X 1/4" FIP	200	20	49
T-HANDLE				
100-397G-TH	1/8" FIP X 1/8" MIP	250	25	40
100-398G-TH	1/4" FIP X 1/8" MIP	200	20	49
100-399G-TH	1/4" FIP X 1/4" MIP	250	25	40
100-400G-TH	1/4" FIP X 1/4" FIP	200	20	49

- Dezincification Resistant Brass Alloy
- Large Raised Wrench Flats
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



## JFPG-100

2 Piece, Full Port, Push Fit Connection, 200 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-103JFPG	1/2"	80	10	41
100-104JFPG	3/4"	45	5	33
100-105JFPG	1"	30	2	40

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Easy to Connect and Fit in Seconds
- Connects with Copper, CPVC, PVC, and Pex
- Includes Two Pipe Reinforcers
- IAPMO Certified - NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content




## T-100HFG

2 Piece, Full Port, Threaded x Hose Connection with Cap and Chain, Stainless Steel Trim, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-653G	1/2" x 3/4" Hose	100	10	60
100-654G	3/4" x 3/4" Hose	60	10	57

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- Cap and Chain for Easy Drain and Hose Connection
- Heavy Steel Chain
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content

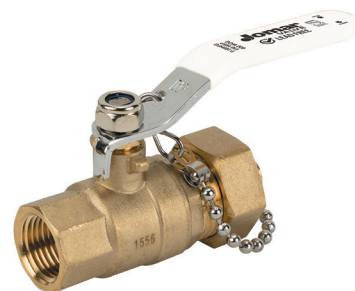

## S-100HSG

2 Piece, Full Port, Solder x Hose Connection with Cap and Chain, Stainless Steel Trim, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-663G	1/2" x 3/4" Hose	100	10	46
100-664G	3/4" x 3/4" Hose	60	10	75

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- Cap and Chain for Easy Drain and Hose Connection
- Heavy Steel Chain
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content





**P-100HPG**

2 Piece, Full Port, Press x Hose Connection with Cap and Chain, Stainless Steel Trim, 250 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-673G	1/2" x 3/4" Hose	100	10	60
100-674G	3/4" x 3/4" Hose	100	10	60

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Cap and Chain for Easy Drain and Hose Connection
- Heavy Steel Chain
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372 & NSF 14 Certified
- Wetted Surfaces Contain Less than .25% Lead Content



**Lead Free Add-a-Valve**

Emergency Shut Off Device



PART NUMBER	SIZE	WEIGHT
800-103ADDG	1/2"	3
800-104ADDG	3/4"	5
800-105ADDG	1"	7
800-106ADDG	1-1/4"	12
800-107ADDG	1-1/2"	16
800-108ADDG	2"	23

- Dezincification Resistant Brass Alloy
- Eliminates Facility Shutdowns
- Cuts Through Copper Tubing with a Hardened Steel Stem Cutter
- Expands a Viton® Seal Across Cut to Stop the Flow
- No Pipe Freezing, No Bulky Nitrogen Tanks, No Complete Shutdown
- Bottom Cleanout Cap Serves as Line Tap
- Lead Free Sweat Ball Valve Included in Package
- Loc-Tite® Gasket Sealant Included
- U.S. and Canadian Patent No. 5,316,037
- Can be Installed on Potable Hot/Cold Water and Water/Glycol Systems
- IAPMO Certified - NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



## T-200CSS

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 600 CWP

PART NUMBER	SIZE
200-701	1/4"
200-702	3/8"
200-703	1/2"
200-704	3/4"
200-705	1"
200-706	1-1/4"
200-707	1-1/2"
200-708	2"

- Dezincification Resistant Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating



## S-200CSS

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, 600 CWP

PART NUMBER	SIZE
200-803	1/2"
200-804	3/4"
200-805	1"
200-806	1-1/4"
200-807	1-1/2"
200-808	2"

- Dezincification Resistant Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating



## T-200CSS-LH

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Locking Handle, 600 CWP

PART NUMBER	SIZE
200-701-LH	1/4"
200-702-LH	3/8"
200-703-LH	1/2"
200-704-LH	3/4"
200-705-LH	1"
200-706-LH	1-1/4"
200-707-LH	1-1/2"
200-708-LH	2"

- Dezincification Resistant Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating





**S-200CSS-LH**

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, Locking Handle, 600 CWP

PART NUMBER	SIZE
200-803-LH	1/2"
200-804-LH	3/4"
200-805-LH	1"
200-806-LH	1-1/4"
200-807-LH	1-1/2"
200-808-LH	2"

- Dezincification Resistant Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating



**T-200CSS-IH**

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Insulated Handle, 600 CWP

PART NUMBER	SIZE
200-701-IH	1/4"
200-702-IH	3/8"
200-703-IH	1/2"
200-704-IH	3/4"
200-705-IH	1"
200-706-IH	1-1/4"
200-707-IH	1-1/2"
200-708-IH	2"

- Dezincification Resistant Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating



**S-200CSS-IH**

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, Insulated Handle, 600 CWP

PART NUMBER	SIZE
200-803-IH	1/2"
200-804-IH	3/4"
200-805-IH	1"
200-806-IH	1-1/4"
200-807-IH	1-1/2"
200-808-IH	2"


- Dezincification Resistant Bronze
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating



# T-100NE



VIBRATION PROOF SELF-LOCKING NUT

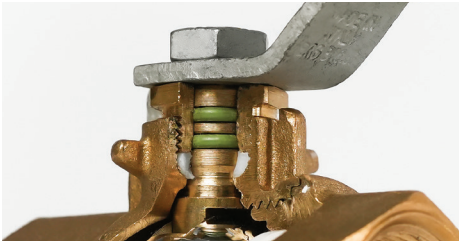

DOUBLE FKM O-RINGS



T.E.A. COATED BRASS BALL



## T-100NE

2 Piece, Full Port, Threaded Connection, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-701	1/4"	120	12	43
100-702	3/8"	120	12	41
100-703	1/2"	100	10	55
100-704	3/4"	60	10	53
100-704RAT*	3/4"	60	10	52
100-705	1"	36	6	56
100-706	1-1/4"	24	4	56
100-707	1-1/2"	16	2	52
100-708	2"	12	2	61
100-709	2-1/2"	6	2	59
100-710	3"	4	2	57
100-711	4"	2	1	46

\*RED ALUMINUM HANDLE

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Accessories Available





**S-100NE**

2 Piece, Full Port, Solder Connection, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-803	1/2"	120	12	52
100-804	3/4"	72	12	55
100-805	1"	36	6	47
100-806	1-1/4"	24	4	46
100-807	1-1/2"	16	2	46
100-808	2"	12	2	52
100-809	2-1/2"	6	2	51
100-810	3"	4	2	51

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Accessories Available



**T-100NE-LH**

2 Piece, Full Port, Threaded Connection, Locking Handle, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-701-LH	1/4"	120	12	44
100-702-LH	3/8"	120	12	42
100-703-LH	1/2"	100	10	56
100-704-LH	3/4"	60	10	54
100-705-LH	1"	36	6	57
100-706-LH	1-1/4"	24	4	57
100-707-LH	1-1/2"	16	2	53
100-708-LH	2"	12	2	62

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating



**T-100NE-IH**

2 Piece, Full Port, Threaded Connection, Insulated Handle, 600 WOG

PART NUMBER	SIZE
100-703-IH	1/2"
100-704-IH	3/4"
100-705-IH	1"
100-706-IH	1-1/4"
100-707-IH	1-1/2"
100-708-IH	2"

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- UL 2043 Certified Handle
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating



**T-100NE-OH**

2 Piece, Full Port, Threaded Connection, Oval Handle, 600 WOG

PART NUMBER	SIZE
100-703-OH	1/2"
100-704-OH	3/4"
100-705-OH	1"
100-706-OH	1-1/4"
100-707-OH	1-1/2"
100-708-OH	2"

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating





## T-100SSE

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-501	1/4"	120	12	42
100-502	3/8"	120	12	40
100-503	1/2"	100	10	54
100-504	3/4"	60	10	52
100-505	1"	36	6	57
100-506	1-1/4"	24	4	58
100-507	1-1/2"	16	2	59
100-508	2"	12	2	70
100-509	2-1/2"	6	2	69
100-510	3"	4	2	70

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- T.E.A. Ternary Eco Alloy® Coated Body, which Prevents Dezincification and Galvanic Corrosion
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Accessories Available



## T-100SSS

2 Piece, Full Port, Threaded Connection with Steam Trim, Stainless Steel Trim, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-533	1/2"	100	10	55
100-534	3/4"	60	6	52
100-535	1"	36	6	57
100-536	1-1/4"	24	4	58
100-537	1-1/2"	16	2	59
100-538	2"	12	2	71

- Triple Sealing Stem with 2 FKM O-Rings and Graphite Seal
- 250 WSP Rating
- Special High Temperature Resistant Handle
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Accessories Available



## T-100FMN

2 Piece, Full Port, MIP x FIP Connection, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-601	1/4"	100	10	36
100-602	3/8"	100	10	36
100-603	1/2"	100	10	54
100-604	3/4"	60	10	53
100-605	1"	36	6	55

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Accessories Available





**T-100UE**

2 Piece, Full Port, Threaded Connection with Side Tap, Single Union End, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
160-103	1/2"	60	10	54
160-104	3/4"	36	6	48
160-105	1"	24	4	53
160-106	1-1/4"	16	2	59
160-107	1-1/2"	8	2	39
160-108	2"	8	2	59

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- 3/8"-1/2": 1/8" FIP Side Tap
- 3/4"-2": 1/4" FIP Side Tap
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Accessories Available

**T-100STN**

2 Piece, Full Port, Threaded Connection with Side Tap, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
170-103	1/2"	80	8	52
170-104	3/4"	60	10	58
170-105	1"	36	6	59
170-106	1-1/4"	24	4	63
170-107	1-1/2"	16	2	56
170-108	2"	12	2	64

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- FIP x Union FIP
- 3/8"-1/2": 1/8" FIP Side Tap
- 3/4"-2": 1/4" FIP Side Tap
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Accessories Available

**JP-100**

2 Piece, Full Port, Press Connection, 250 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-203	1/2"	60	10	33
100-204	3/4"	40	10	35
100-205	1"	32	8	44
100-206	1-1/4"	24	4	49
100-207	1-1/2"	4	1	14
100-208	2"	4	1	20

- Corrosion Resistant Brass
- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating
- Accessories Available





## JP-100 XLC

2 Piece, Full Port, Press XLC Connection, 200 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-209XLC	2-1/2"	2	1	18
100-210XLC	3"	2	1	28
100-211XLC	4"	1	1	25

- Triple Sealing Stem with 2 FKM O-Rings and 2nd Generation PTFE Seal
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty



## S-100-DUE

2 Piece, Full Port, Solder Connection, Double Union End, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
160-503	1/2"	48	12	35
160-504	3/4"	48	8	57
160-505	1"	21	4	52
160-506	1-1/4"	16	4	50
160-507	1-1/2"	12	2	49
160-508	2"	4	2	25

- Corrosion Resistant Brass
- Triple Sealing Stem with 2 FKM O-Rings and Teflon Seal
- Blow-Out Proof Stem
- Unions on Inlet and Outlet
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- Accessories Available




## T-82-M

Mini Valve, 2 Piece, Full Port, Threaded Connection, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
SCREWDRIVER SLOT				
100-295	1/4" FIP X 1/4" MIP	350	35	58
LEVER HANDLE				
100-297	1/8" FIP X 1/8" MIP	200	50	39
100-298	1/4" FIP X 1/8" MIP	250	25	47
100-299	1/4" FIP X 1/4" MIP	200	50	39
100-300	1/4" FIP X 1/4" FIP	200	50	45

- 2 FKM O-Rings
- Blow-Out Proof Stem
- Greater Flow Rate
- Large Raised Wrench Flats
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- 29 in-Hg Vacuum Rating

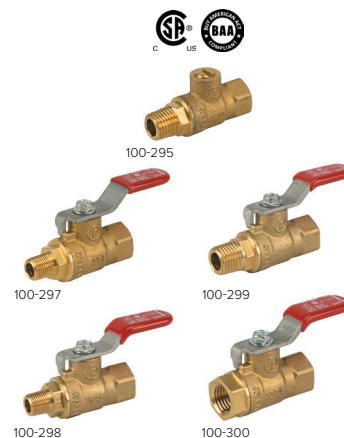



### T-84-M

Mini Valve, 1 Piece, Standard Port, Threaded Connection, 450 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
FIP X FIP				
100-430	1/8"	100	25	19
100-431	1/4"	100	25	19
100-432	3/8"	100	25	19
100-433	1/2"	100	25	31
MIP X FIP				
100-440	1/8"	100	25	15
100-441	1/4"	100	25	15
100-442	3/8"	100	25	18
100-443	1/2"	100	25	29

- Chrome Plated Brass
- Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy



### T-84-EH

Mini Valve, 1 Piece, Standard Port, Threaded Connection, Extended Handle, 450 WOG

PART NUMBER	SIZE
100-460	1/8"
100-461	1/4"
100-462	3/8"
100-463	1/2"

- Chrome Plated Brass
- Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- 100% Made in Italy




### T-83C

Mini Valve, 2 Piece, Full Port, Threaded Connection, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
100-397	1/8" FIP x 1/8" MIP	250	25	40
100-398	1/4" FIP x 1/8" MIP	200	20	40
100-399	1/4" FIP x 1/4" MIP	250	25	44
100-400	1/4" FIP x 1/4" FIP	200	20	33
T-HANDLE				
100-397-TH	1/8" FIP x 1/8" MIP	250	25	40
100-398-TH	1/4" FIP x 1/8" MIP	200	20	40
100-399-TH	1/4" FIP x 1/4" MIP	250	25	40
100-400-TH	1/4" FIP x 1/4" FIP	200	20	49

- 2 Buna-N O-Rings
- Large Raised Wrench Flats
- 100% Made in Italy

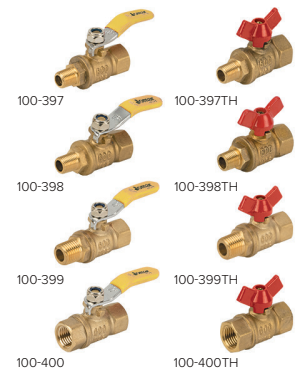



## JF-100T

2 Piece, Full Port, Threaded Connection, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-101	1/4"	120	10	39
100-102	3/8"	120	10	40
100-103	1/2"	100	10	48
100-104	3/4"	80	10	63
100-105	1"	48	8	56
100-106	1-1/4"	36	4	67
100-107	1-1/2"	24	2	61
100-108	2"	12	3	44
100-109	2-1/2"	6	1	49
100-110	3"	6	1	66
100-111	4"	2	1	40
T-HANDLE				
100-101-TH	1/4"	120	10	40
100-102-TH	3/8"	120	10	40
100-103-TH	1/2"	100	10	50
100-104-TH	3/4"	120	10	40
100-105-TH	1"	48	8	58

- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested



LEVER HANDLE



T-HANDLE



## JF-100S

2 Piece, Full Port, Solder Connection, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-113	1/2"	100	10	45
100-114	3/4"	80	10	61
100-115	1"	48	8	53
100-116	1-1/4"	36	4	68
100-117	1-1/2"	24	2	62
100-118	2"	12	3	47
100-119	2-1/2"	6	1	44
100-120	3"	6	1	55
100-121	4"	2	1	35

- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested





**JF-100T-LH**

2 Piece, Full Port, Threaded Connection, Locking Handle, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-101-LH	1/4"	120	10	40
100-102-LH	3/8"	120	10	40
100-103-LH	1/2"	100	10	52
100-104-LH	3/4"	80	10	70
100-105-LH	1"	48	8	61
100-106-LH	1-1/4"	36	4	68
100-107-LH	1-1/2"	24	2	61
100-108-LH	2"	12	3	45
100-109-LH	2-1/2"	6	1	49
100-110-LH	3"	6	1	69
100-111-LH	4"	2	1	40

- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- Latch Lock Handle
- 100% Leak Tested



**JF-100S-LH**

2 Piece, Full Port, Solder Connection, Locking Handle, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-113-LH	1/2"	100	10	45
100-114-LH	3/4"	80	10	61
100-115-LH	1"	48	8	53
100-116-LH	1-1/4"	36	4	68
100-117-LH	1-1/2"	24	2	62
100-118-LH	2"	12	3	47
100-119-LH	2-1/2"	6	1	44
100-120-LH	3"	6	1	55
100-121-LH	4"	2	1	35

- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- Latch Lock Handle
- 100% Leak Tested



**JF-100TFM**

2 Piece, Full Port, MIP x FIP Connection, 600 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
100-131	1/4"	120	10	60
100-132	3/8"	120	10	60
100-133	1/2"	100	10	50
100-134	3/4"	80	10	60
100-135	1"	48	8	58
T-HANDLE				
100-131-TH	1/4"	120	10	60
100-132-TH	3/8"	120	10	60
100-133-TH	1/2"	100	10	50
100-134-TH	3/4"	80	10	60
100-135-TH	1"	48	8	58

- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested



## JF-100TS

2 Piece, Full Port, SAE Threaded Connection, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-106-20	1-1/4"	36	4	67
100-107-24	1-1/2"	24	2	61

- 100% Leak Tested
- Forged Brass Body
- Blow Out Proof Stem Design
- Adjustable Packing Gland
- Full Port
- SAE J1926-1 Threads
- 29in-HG Vacuum Rating





**S-650-CE-4B**

3 Piece 4 Bolt, Copper Stub Connection, Oxygen Cleaned, 600 WOG

PART NUMBER	SIZE	WEIGHT
500-803	1/2"	2
500-804	3/4"	3
500-805	1"	4
500-806	1-1/4"	5
500-807	1-1/2"	7
500-808	2"	17

- NFPA-99C Standard
- "K" Copper Tubing Extensions Silver Brazed
- Latch Lock Handle is Standard
- Oxygen Cleaned
- 100% Leak Tested
- 29 in-Hg Vacuum Rating



**S-675-DGP-4B**

3 Piece 4 Bolt, Copper Stub Connection, Double Gauge Port, Oxygen Cleaned, 600 WOG

PART NUMBER	SIZE	WEIGHT
500-833	1/2"	2
500-834	3/4"	3
500-835	1"	4
500-836	1-1/4"	5
500-837	1-1/2"	7
500-838	2"	13

- NFPA-99C Standard
- Two 1/8" Gauge Purge Ports
- "K" Copper Tubing Extensions Silver Brazed
- Latch Lock Handle is Standard
- Oxygen Cleaned
- 100% Leak Tested
- 29 in-Hg Vacuum Rating



**S-675-DGP-4B-SS**

3 Piece 4 Bolt, Copper Stub Connection, Double Gauge Port, Oxygen Cleaned, Stainless Steel Trim, 600 WOG

PART NUMBER	SIZE	WEIGHT
500-833SS	1/2"	2
500-834SS	3/4"	3
500-835SS	1"	4
500-836SS	1-1/4"	5
500-837SS	1-1/2"	7
500-838SS	2"	13

- NFPA-99C Standard
- Two 1/8" Gauge Purge Ports
- "K" Copper Tubing Extensions Silver Brazed
- Latch Lock Handle is Standard
- Oxygen Cleaned
- 100% Leak Tested
- 29 in-Hg Vacuum Rating



**Repair Kit**

Medical Gas Ball Valves

PART NUMBER	SIZE
899-563	1/2"
899-564	3/4"
899-565	1"
899-566	1-1/4"
899-567	1-1/2"
899-568	2"





## T-204


2 Piece, 600 WOG

T-HANDLE	TEARDROP	SIZE	CASE	CARTON	WEIGHT
FIP X FIP					
101-401	101-411	1/4"	120	12	44
101-402	101-412	3/8"	120	12	40
101-403	101-413	1/2"	120	12	49
101-404	101-414	3/4"	80	8	56
101-404BRT*	-	3/4"	60	6	52
*Brass T-Handle					
FLARE X FIP					
101-502	101-512	3/8" X 1/2"	140	14	56
101-503	101-513	1/2" X 1/2"	140	14	61
101-504	-	5/8" X 3/4"	80	8	51
FLARE X FLARE					
101-601	-	1/2" X 3/8"	120	12	52
101-602	101-612	3/8" X 3/8"	120	12	48
101-603	101-613	1/2" X 1/2"	120	12	54
101-604	101-614	5/8" X 5/8"	80	8	51
MIP X FLARE					
101-702	-	1/2" X 3/8"	120	12	51
101-703	-	1/2" X 1/2"	120	12	52

- T-Handle or Teardrop Handle Available on Most Configurations
- Valve Can be Locked in Closed Position by Reversing Handle
- 2 FKM O-Rings
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- Use Model T-100NE for Sizes Above 3/4"



FIP X FIP



FLARE X FIP



FLARE X FLARE



MIP X FLARE



## T-204DU

2 Piece, Integrated Dielectric Union End, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
FIP DU X FIP				
101-403DU	1/2" X 1/2"	80	8	54
101-404DU	3/4" X 3/4"	40	4	43
FIP DU X FLARE				
101-513DU	1/2" X 1/2"	80	8	58
MIP DU X FLARE				
101-703DU	1/2" X 1/2"	60	6	46
101-704DU	3/4" X 5/8"	40	8	44
MIP DU X FIP				
101-803DU	1/2" X 1/2"	60	6	46
101-804DU	3/4" X 3/4"	40	8	47

- Meets NFPA 58 Dielectric Union Requirement
- Valve Can be Locked in Closed Position by Reversing Handle
- 2 FKM O-Rings
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty



FIP UE X FIP

FIP UE X FLARE



MIP UE X FLARE

MIP UE X FIP





**T-203**

2 Piece, Side Tap, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
FIP X FIP				
102-301	1/4"	100	10	44
102-302	3/8"	100	10	40
102-303	1/2"	100	10	47
102-304	3/4"	80	8	61
FLARE X FLARE				
102-402	3/8"	120	12	51
102-403	1/2"	120	12	57
102-404	5/8"	80	8	54
FLARE X FLARE				
102-405	1/2"	100	10	50

- Eliminates Need for Test Tee and Labor to Install
- Ideal for Outside Use in Extremely Cold Climates
- Removable Plug Enables Port for Pressure Gauge
- 1/8" Side Tap
- Valve Can be Locked in Closed Position by Reversing Handle
- 2 FKM O-Rings
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem – Lifetime Warranty
- Use Model T-100STN for Sizes Above 3/4"



FIP UE X FIP

FIP UE X FLARE



FLARE X FIP



**T-203DU**

2 Piece, Integrated Dielectric Union End, Side Tap, 600 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
MIP DU X FIP				
102-303DU	1/2"	60	6	49
102-304DU	3/4"	40	4	48
FIP DU X FIP				
102-313DU	1/2"	60	6	43
102-314DU	3/4"	40	4	44
MIP DU X FLARE				
102-403DU	1/2"	60	6	48
FIP DU X FLARE				
102-413DU	1/2"	60	6	42

- Meets NFPA 58 Dielectric Union Requirement
- Eliminates Need for Test Tee and Labor to Install
- Removable Plug Enables Port for Pressure Gauge
- Valve Can be Locked in Closed Position by Reversing Handle
- 2 FKM O-Rings
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty



MIP UE X FIP

MIP UE X FIP



MIP UE X FLARE

FIP UE X FLARE



**T-205**

2 Piece, Threaded Connection, 400 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
RED T-HANDLE				
102-503	1/2"	140	14	60
102-504	3/4"	100	10	59
102-505	1"	60	10	57
YELLOW TEARDROP HANDLE				
102-513	1/2"	120	12	49
102-514	3/4"	100	10	58

- Valve Can be Locked in Closed Position by Reversing Handle
- Triple Sealing Stem with 2 FKM O-Rings and Teflon® Seal
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty



T-HANDLE

TEARDROP HANDLE



## T-2005C

2 Piece, Threaded Connection, 175 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
YELLOW TEARDROP HANDLE				
102-603	1/2"	100	10	35
102-604	3/4"	100	10	52
102-605	1"	60	6	51
RED TEARDROP HANDLE				
102-623	1/2"	100	10	34
102-624	3/4"	100	10	48
102-625	1"	60	6	52

- Valve Can be Locked in Open or Closed Position by Reversing Handle
- Gland Follower and Single O-Ring Stem Design
- 100% Leak Tested



YELLOW TEARDROP HANDLE    RED TEARDROP HANDLE



## T-2004C

2 Piece, 175 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
FLARE X FLARE				
102-612	3/8"	100	10	31
102-613	1/2"	100	10	38
102-614	5/8"	60	10	51
FLARE X FIP				
102-633	1/2"	100	10	38

- Valve Can be Locked in Open or Closed Position by Reversing Handle
- Gland Follower and Single O-Ring Stem Design
- Plastic Caps to Protect Flare Connection and Threads
- 100% Leak Tested



FLARE X FLARE    FLARE X FIP



**T-CS-1001N-SS**

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 1000 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-971	1/4"	80	10	51
100-972	3/8"	80	10	50
100-973	1/2"	60	10	47
100-974	3/4"	30	10	47
100-975	1"	20	10	47
100-976	1-1/4"	16	4	58
100-977	1-1/2"	8	4	46
100-978	2"	6	2	52

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



**T-CS-2000N-SS**

2 Piece, Standard Port, Threaded Connection, Stainless Steel Trim, 2000 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-951	1/4"	80	10	44
100-952	3/8"	80	10	45
100-953	1/2"	80	10	56
100-954	3/4"	30	10	43
100-955	1"	30	10	57
100-956	1-1/4"	20	5	53
100-957	1-1/2"	15	5	58
100-958	2"	10	5	58

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



**T-CS-1000N-SS-4B**

3 Piece 4 Bolt, Swing Out Body, Full Port, Threaded Connection, Stainless Steel Trim, 1000 WOG



PART NUMBER	SIZE	CARTON	WEIGHT
500-403	1/2"	10	14
500-404	3/4"	10	21
500-405	1"	8	25
500-406	1-1/4"	5	24
500-407	1-1/2"	5	34
500-408	2"	2	21

- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available





## S-CS-1000N-SS-4B

3 Piece 4 Bolt, Swing Out Body, Full Port, Socket Weld Connection, Stainless Steel Trim, 1000 WOG

PART NUMBER	SIZE	CARTON	WEIGHT
500-503	1/2"	10	14
500-504	3/4"	10	21
500-505	1"	8	25
500-506	1-1/4"	5	24
500-507	1-1/2"	5	34
500-508	2"	2	21

- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



## T-CS-2001N-SS-4B

3 Piece 4 Bolt Enclosed, Standard Port, Threaded Connection, Stainless Steel Trim, 2000 WOG

PART NUMBER	SIZE	CARTON	WEIGHT
601-613	1/2"	10	19
601-614	3/4"	10	23
601-615	1"	8	31
601-616	1-1/4"	5	31
601-617	1-1/2"	5	39
601-618	2"	2	22

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



## S-CS-2001N-SS-4B

3 Piece 4 Bolt Enclosed, Standard Port, Socket Weld Connection, Stainless Steel Trim, 2000 WOG

PART NUMBER	SIZE	CARTON	WEIGHT
601-633	1/2"	10	19
601-634	3/4"	10	23
601-635	1"	8	31
601-636	1-1/4"	6	31
601-637	1-1/2"	5	39
601-638	2"	2	22

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available





**T-CS-2002N-SS-DUE**

5 Piece, Full Port, Threaded Connection, Double Union End, Stainless Steel Trim, 3000 WOG



PART NUMBER	SIZE	CARTON	WEIGHT
100-992	3/8"	10	19
100-993	1/2"	10	18
100-994	3/4"	8	21
100-995	1"	8	31
100-996	1-1/4"	6	35
100-997	1-1/2"	4	36
100-998	2"	2	26

- Solid Ball Construction
- Mounting Pad
- Reversible Handle
- Locking Handle Available
- Adjustable Stem Packing with Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



**S-CS-2002N-SS-DUE**

5 Piece, Full Port, Socket Weld Connection, Double Union End, Stainless Steel Trim, 3000 WOG



PART NUMBER	SIZE	CARTON	WEIGHT
101-992	3/8"	10	19
101-993	1/2"	10	18
101-994	3/4"	8	21
101-995	1"	8	31
101-996	1-1/4"	6	35
101-997	1-1/2"	4	36
101-998	2"	2	26

- Solid Ball Construction
- Mounting Pad
- Reversible Handle
- Locking Handle Available
- Adjustable Stem Packing with Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available





## FL-CS-100-150

2 Piece, Full Port, Flanged Connection, Stainless Steel Trim, 150 Class



PART NUMBER	SIZE	CARTON	WEIGHT
600-203	1/2"	2	7
600-204	3/4"	2	9
600-205	1"	2	14
600-207	1-1/2"	2	28
600-208	2"	2	20
600-209	2-1/2"	1	28
600-210	3"	1	46
600-211	4"	1	74
600-212	6"	1	176
600-213	8"	1	342
600-214	10"	1	551
600-215	12"	1	817

- Raised Face Flange
- Wrench Operator
- Locking Device Comes Standard
- Fire Safe Stem and Body Graphite Seals
- Air Tested Seat Leakage: 85 PSI
- Hydraulic Tested Body: 427 PSI
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



## FL-CS-100-300

2 Piece, Full Port, Flanged Connection, Stainless Steel Trim, 300 Class



PART NUMBER	SIZE	CARTON	WEIGHT
600-228	2"	1	28
600-230	3"	1	62
600-231	4"	1	106
600-232	6"	1	225
600-233	8"	1	404

- Raised Face Flange
- Wrench Operator
- Locking Device Comes Standard
- Fire Safe Stem and Body Graphite Seals
- Air Tested Seat Leakage: 85 PSI
- Hydraulic Tested Body: 1124 PSI
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available





**T-SS-1001N**

2 Piece, Full Port, Threaded Connection, 1000 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-961	1/4"	80	10	53
100-962	3/8"	80	10	50
100-963	1/2"	60	10	49
100-964	3/4"	30	10	47
100-965	1"	20	10	46
100-966	1-1/4"	16	4	58
100-967	1-1/2"	8	4	44
100-968	2"	6	2	49

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



**T-SS-2000N**

2 Piece, Standard Port, Threaded Connection, 2000 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-931	1/4"	80	10	45
100-932	3/8"	80	10	42
100-933	1/2"	80	10	56
100-934	3/4"	30	10	43
100-935	1"	30	10	58
100-936	1-1/4"	20	5	53
100-937	1-1/2"	15	5	58
100-938	2"	10	5	58

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



**T-SS-2000N-FP**

2 Piece, Full Port, Threaded Connection, 2000 WOG



PART NUMBER	SIZE	CASE	WEIGHT
100-941	1/4"	36	25
100-942	3/8"	36	23
100-943	1/2"	70	55
100-944	3/4"	40	51
100-945	1"	25	49
100-946	1-1/4"	18	53
100-947	1-1/2"	10	47
100-948	2"	7	51
100-949	2-1/2"	3	41
100-950	3"	1	23
100-951	4"	1	47

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



## T-SS-2000N-MF

2 Piece, Standard Port, MIP x FIP Connection, 2000 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-931	1/4"	80	10	42
100-933	1/2"	80	10	56
100-934	3/4"	30	10	43
100-935	1"	30	10	58

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content




## T-SS-2000N-DH

2 Piece, Standard Port, Threaded Connection, Spring Return Handle, 2000 WOG



PART NUMBER	SIZE	CARTON	WEIGHT
100-931-DH	1/4"	10	13
100-932-DH	3/8"	10	13
100-933-DH	1/2"	10	14
100-934-DH	3/4"	8	17
100-935-DH	1"	8	22
100-936-DH	1-1/4"	1	3
100-937-DH	1-1/2"	1	4
100-938-DH	2"	1	5

- Solid Ball Construction
- Fail Safe Position
- 1-1/4"-2": 3 Piece, 4 Bolt Pattern
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content

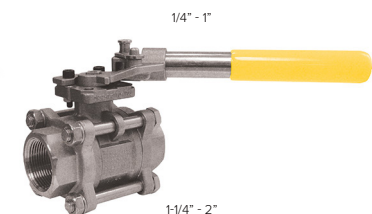

## T-SS-1050N-3L

2 Piece, Reduced Port, 3-Way Dispenser, Threaded Connection, 1000 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
500-203	1/2"	10	50	64
500-204	3/4"	10	50	82
500-205	1"	6	30	73

- Locking Handle
- Blow-Out Proof Stem
- Antistatic Device
- 180° Handle Prevents Cross-Contamination
- ISO 5211 Mounting Pad



## T-SS-900N

2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 1000 WOG



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
100-903	1/2"	50	5	21
100-904	3/4"	40	4	24
100-905	1"	24	2	22
100-906	1-1/4"	24	2	31
100-907	1-1/2"	12	2	24
100-908	2"	12	2	38

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content



# T-SS-1000N-4B



3 PIECE 4 BOLT SWING OUT BODY DESIGN



HANDLE MAY BE LOCKED IN OPEN OR CLOSED POSITION



MULTIPLE CONFIGURATIONS



## T-SS-1000N-4B

3 Piece 4 Bolt, Swing Out Body, Full Port, Threaded Connection, Stainless Steel Trim, 1000 WOG



PART NUMBER	SIZE NPT	CARTON	WEIGHT
500-301	1/4"	10	10
500-302	3/8"	10	10
500-303	1/2"	10	14
500-304	3/4"	10	21
500-305	1"	8	25
500-306	1-1/4"	5	23
500-307	1-1/2"	5	34
500-308	2"	2	21
500-310	3"	2	58
500-311	4"	1	45
NPT X SQUARE FLANGE			
500-358	2"	2	26
SQUARE FLANGE X SQUARE FLANGE			
500-368	2"	2	32
NPT WITH PORT TAP			
501-308	2"	2	23
NPT X SQUARE FLANGE WITH PORT TAP			
501-358	2"	2	28

- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



NPT



NPT X SQUARE FLANGE



SQUARE FLANGE X SQUARE FLANGE



NPT W/PORT TAP



NPT X SQUARE FLANGE W/PORT TAP



## S-SS-1000N-4B

3 Piece 4 Bolt, Swing Out Body, Full Port, Socket Weld Connection, Stainless Steel Trim, 1000 WOG



SWT



SWT W/PORT TAP

PART NUMBER	SIZE	CARTON	WEIGHT
SWT			
500-343	1/2"	10	14
500-344	3/4"	10	21
500-345	1"	8	25
500-346	1-1/4"	5	24
500-347	1-1/2"	5	34
500-348	2"	2	21
500-350	2"	2	56
500-351	2"	1	45
SWT WITH PORT TAP			
511-308	2"	2	21

- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



## TS-SS-1000N-4B

3 Piece 4 Bolt, Swing Out Body, Full Port, Threaded x Socket Weld Connection, Stainless Steel Trim, 1000 WOG



PART NUMBER	SIZE	CARTON	WEIGHT
500-376	1-1/4"	5	24
500-378	2"	2	21

- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



## T-SS-2001N-4B

3 Piece 4 Bolt Enclosed, Standard Port, Threaded Connection, Stainless Steel Trim, 2000 WOG



PART NUMBER	SIZE	CARTON	WEIGHT
601-603	1/2"	10	19
601-604	3/4"	10	23
601-605	1"	8	31
601-606	1-1/4"	6	31
601-607	1-1/2"	5	29
601-608	2"	2	22

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



**S-SS-2001N-4B**

3 Piece 4 Bolt Enclosed, Standard Port, Socket Weld Connection, Stainless Steel Trim, 2000 WOG



PART NUMBER	SIZE	CARTON	WEIGHT
601-623	1/2"	10	19
601-624	3/4"	10	23
601-625	1"	8	31
601-626	1-1/4"	6	31
601-627	1-1/2"	5	39
601-628	2"	2	22

- Solid Ball Construction
- Latch Lock Handle May be Locked in Open or Closed Position
- Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



**T-SS-2002N-DUE**

5 Piece, Full Port, Threaded Connection, Double Union End, Stainless Steel Trim, 3000 WOG



PART NUMBER	SIZE	CARTON	WEIGHT
100-983	1/2"	10	17
100-984	3/4"	8	20
100-985	1"	8	30
100-986	1-1/4"	6	34
100-987	1-1/2"	4	35
100-988	2"	2	26

- Solid Ball Construction
- Mounting Pad
- Reversible Handle
- Locking Handle Available
- Adjustable Stem Packing with Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



**S-SS-2002N-DUE**

5 Piece, Full Port, Socket Weld Connection, Double Union End, Stainless Steel Trim, 3000 WOG



PART NUMBER	SIZE	CARTON	WEIGHT
101-983	1/2"	10	17
101-984	3/4"	8	20
101-985	1"	8	30
101-986	1-1/4"	6	34
101-987	1-1/2"	4	35
101-988	2"	2	26

- Solid Ball Construction
- Mounting Pad
- Reversible Handle
- Locking Handle Available
- Adjustable Stem Packing with Blow-Out Proof Stem
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



**T-SS-1000**

Mini Valve, 1 Piece/2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 1000 WOG



PART NUMBER	SIZE	CARTON
500-098	1/8" FIP X 1/8" MIP	10
500-099	1/4" FIP X 1/4" MIP	10
500-101	1/4" FIP X 1/4" FIP	10

- Solid Ball Construction
- Corrosion Resistant
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content



1/4" FIP X 1/4" FIP



## FL-SS-100-150

2 Piece, Full Port, Flanged Connection, 150 Class



PART NUMBER	SIZE	CARTON	WEIGHT
600-103	1/2"	2	7
600-104	3/4"	2	9
600-105	1"	2	14
600-107	1-1/2"	2	28
600-108	2"	2	20
600-109	2-1/2"	1	28
600-110	3"	1	46
600-111	4"	1	74
600-112	6"	1	176
600-113	8"	1	342
600-114	10"	1	551
600-115	12"	1	817

- Raised Face Flange
- Wrench Operator
- Locking Device Comes Standard
- Fire Safe Stem and Body Graphite Seals
- Air Tested Seat Leakage: 85 PSI
- Hydraulic Tested Body: 427 PSI
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available



## FL-SS-100-300

2 Piece, Full Port, Flanged Connection, 300 Class



PART NUMBER	SIZE	CARTON	WEIGHT
600-128	2"	1	28
600-130	3"	1	62
600-131	4"	1	106
600-132	6"	1	225
600-133	8"	1	404

- Raised Face Flange
- Wrench Operator
- Locking Device Comes Standard
- Fire Safe Stem and Body Graphite Seals
- Air Tested Seat Leakage: 85 PSI
- Hydraulic Tested Body: 1124 PSI
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available





**Repair Kit**

Carbon Steel & Stainless Steel Ball Valves

PART NUMBER	SIZE	PART NUMBER	SIZE	PART NUMBER	SIZE
1000N SERIES		2001N SERIES		2002N-DUE SERIES	
899-911	1/4"	899-943	1/2"	899-981	1/4"
899-912	3/8"	899-944	3/4"	899-982	3/8"
899-913	1/2"	899-945	1"	899-983	1/2"
899-914	3/4"	899-946	1-1/4"	899-984	3/4"
899-915	1"	899-947	1-1/2"	899-985	1"
899-916	1-1/4"	899-948	2"	899-986	1-1/4"
899-917	1-1/2"			899-987	1-1/2"
899-918	2"			899-988	2"
899-919	2-1/2"				
899-920	3"				
899-921	4"				



**Repair Kit**

Flanged Carbon Steel & Stainless Steel Ball Valves

PART NUMBER	SIZE	PART NUMBER	SIZE
FLANGED 150 CLASS SERIES		FLANGED 300 CLASS SERIES	
600-116	2"	600-136	2"
600-117	2-1/2"	600-137	2-1/2"
600-118	3"	600-138	3"
600-119	4"	600-139	4"
600-120	6"	600-141	6"
600-121	8"	600-143	8"
600-122	10"		
600-123	12"		







# BALANCING VALVES



## TB-120G

RecircSetter™ | Thermostatic Balancing, Variable Set Point, Optional Check Valve, 150 CWP

PART NUMBER	SIZE
180-103G-B	1/2"
180-104G-B	3/4"
WITH CHECK VALVE	
180-103G-B-C	1/2"
180-104G-B-C	3/4"

- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Optional Check Valve
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



OPTIONAL CHECK VALVE



## TB-130G

RecircSetter™ | Thermostatic Balancing, Variable Set Point, Optional Check Valve, Thermal Disinfection, 150 CWP

PART NUMBER	SIZE
180-103G-D	1/2"
180-104G-D	3/4"
WITH CHECK VALVE	
180-103G-D-C	1/2"
180-104G-D-C	3/4"

- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Optional Check Valve
- Thermal Disinfection Bypass (160°F)
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



OPTIONAL CHECK VALVE





## TB-150G

RecircSetter™ | Thermostatic Balancing, Variable Set Point,  
Optional Check Valve, Actuated Thermal Disinfection, 150 CWP

PART NUMBER	SIZE
180-103G-A	1/2"
180-104G-A	3/4"
WITH CHECK VALVE	
180-103G-A-C	1/2"
180-104G-A-C	3/4"

- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Optional Check Valve
- Actuated Thermal Disinfection for use with BMS
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



OPTIONAL CHECK VALVE




## TB-120MG

RecircSetter™ | Thermostatic Balancing, Variable Set Point, Dual Isolation, 150 CWP

PART NUMBER	SIZE
180-103MG-B-I	1/2"
180-104MG-B-I	3/4"

- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Equipped with Dual Isolation Ball Valves
- Union Connection on Ball Valves
- Integrated Check Valve in Downstream Isolation Valve
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available

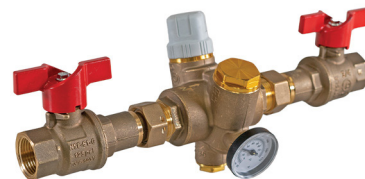

## TB-130MG


RecircSetter™ | Thermostatic Balancing, Variable Set Point, Dual Isolation, Thermal Disinfection, 150 CWP

PART NUMBER	SIZE
180-103MG-D-I	1/2"
180-104MG-D-I	3/4"


- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Equipped with Dual Isolation Ball Valves
- Union Connection on Ball Valves
- Integrated Check Valve in Downstream Isolation Valve
- Thermal Disinfection Bypass (160°F)
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



# TB-150MG

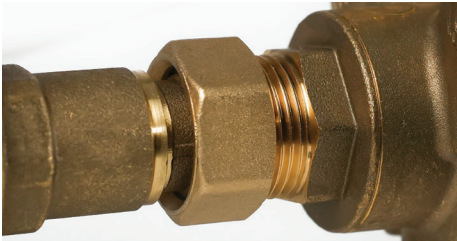

DUAL ISOLATION ASSEMBLY

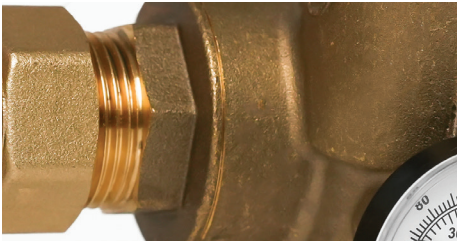

INTEGRATED CHECK VALVE



HANDWHEEL WITH PRESET TEMPERATURE



## TB-150MG

RecircSetter™ | Thermostatic Balancing, Variable Set Point, Dual Isolation, Actuated Thermal Disinfection, 150 CWP



PART NUMBER	SIZE
180-103MG-A-I	1/2"
180-104MG-A-I	3/4"

- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Equipped with Dual Isolation Ball Valves
- Union Connection on Ball Valves
- Integrated Check Valve in Downstream Isolation Valve
- Actuated Thermal Disinfection for use with BMS
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available





## TB-120MFG

RecircSetter™ | Thermostatic Balancing Valve, Variable Set Point, Dual Isolation, Integrated Filter Ball® Strainer, 150 CWP



PART NUMBER	SIZE
180-103MFG-B-I	1/2"
180-104MFG-B-I	3/4"

- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Equipped with Dual Isolation Ball Valve and Filter Ball® Strainer
- Union Connection on Ball Valve
- Integrated Check Valve in Downstream Isolation Valve
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available



## TB-130MFG

RecircSetter™ | Thermostatic Balancing Valve, Variable Set Point, Dual Isolation, Integrated Filter Ball® Strainer, Thermal Disinfection, 150 CWP



PART NUMBER	SIZE
180-103MFG-D-I	1/2"
180-104MFG-D-I	3/4"

- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Equipped with Dual Isolation Ball Valve and Filter Ball® Strainer
- Union Connection on Ball Valve
- Integrated Check Valve in Downstream Isolation Valve
- Thermal Disinfection Bypass (160°F)
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available





**TB-150MFG**

RecircSetter™ | Thermostatic Balancing Valve, Variable Set Point, Dual Isolation, Integrated Filter Ball® Strainer, Actuated Thermal Disinfection, 150 CWP



PART NUMBER	SIZE
180-103MFG-A-I	1/2"
180-104MFG-A-I	3/4"

- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Equipped with Dual Isolation Ball Valve and Filter Ball® Strainer
- Union Connection on Ball Valve
- Integrated Check Valve in Downstream Isolation Valve
- Actuated Thermal Disinfection for use with BMS
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available





## Tail Piece Check Valve

RecircSetter™ | Fits any Model, Installed on Downstream

PART NUMBER	SIZE
180-503G	1/2"
180-504G	3/4"



## Union Ball Valve

RecircSetter™ | Fits any MG/MFG Model, For Dual Isolation

PART NUMBER	SIZE
180-703G	1/2"
180-704G	3/4"

WITH INTEGRATED CHECK VALVE	
180-713G	1/2"
180-714G	3/4"



## Filter Ball® Strainer

RecircSetter™ | Fits any MFG Model, Integrated 3-Way Strainer

PART NUMBER	SIZE
180-723G	1/2"
180-724G	3/4"



## N.C. Thermoelectric Actuator 24V

RecircSetter™ | Fits any TB-150G/MG/MFG Model, Equipped with Limit Micro Switch and VA64 Ring Nut

PART NUMBER
180-893



## Thermowell and Probe

RecircSetter™ | Fits any TB-150G/MG/MFG Model

PART NUMBER
180-TPW



## Double Scale Thermometer

RecircSetter™ | Fits any Model, 32°F - 176°F

PART NUMBER
899-180





**TBG - FNPT**

Terminator B | Manual Balancing Valve, Quarter-Turn, Fixed Orifice, Threaded Connection, Union End, Integrated Ball Valve, Memory Stop, PT Ports, 600 WOG

PART NUMBER	SIZE
TBG-AFF	1/2"
TBG-BFF	3/4"

- Dezincification Resistant Brass Alloy
- +/- 2% Accuracy
- Positive Shut-Off
- Triple Sealing Stem with 2 FKM O-Rings and Teflon Seal
- Blow-Out Proof Stem
- Patented Removable Venturi
- Two Pressure Test Ports
- Additional Accessory Tap
- 100% Leak Tested
- 100% Made in Italy
- NSF 61-8 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Leakproof Stem – Lifetime Warranty



**TGG - FNPT**

Terminator G | Manual Balancing Valve, Multi-Turn Globe Valve, Y-Pattern, Variable Orifice, Threaded Connection, Memory Stop, PT Ports, 300 WOG

PART NUMBER	SIZE	CARTON	WEIGHT
TGG-AFF	1/2"	15	24
TGG-BFF	3/4"	15	24
TGG-CFF	1"	16	31
TGG-DFE	1-1/4"	15	24
TGG-EFF	1-1/2"	15	24
TGG-FFF	2"	15	24

- Dezincification Resistant Brass Alloy
- +/- 5% Accuracy
- Positive Shut-Off
- Two Pressure Test Ports
- Multi-Turn, 360° Handwheel with Vernier Scale and Digital Readouts
- Precise Flow Measurement and Flow Balancing
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content
- Lead Free Compliant to NSF 372



**TGG - SWT**

Terminator G | Manual Balancing Valve, Multi-Turn Globe Valve, Y-Pattern, Variable Orifice, Solder Connection, Memory Stop, PT Ports, 300 WOG

PART NUMBER	SIZE	CARTON	WEIGHT
TGG-ACC	1/2"	15	24
TGG-BCC	3/4"	15	24
TGG-CCC	1"	15	24
TGG-DCC	1-1/4"	12	26
TGG-ECC	1-1/2"	15	24
TGG-FCC	2"	15	24

- Dezincification Resistant Brass Alloy
- +/- 5% Accuracy
- Positive Shut-Off
- Two Pressure Test Ports
- Multi-Turn, 360° Handwheel with Vernier Scale and Digital Readouts
- Precise Flow Measurement and Flow Balancing
- 100% Leak Tested
- Lead Free Compliant to NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content





## TAF

Automatic Balancing Valve, Threaded Connection, Union End, Flow Limiter, PT Ports, 600 WOG

PART NUMBER	SIZE
TAF-AFF	1/2"
TAF-BFF	3/4"
TAF-CFF	1"

- Dezincification Resistant Brass Alloy
- +/-5% Accuracy
- Two Pressure Test Ports
- Stainless Steel Cartridge
- Design Flow Rate of 0.5 GPM; Other Flow Rates Available Upon Request
- Single Reduction Available Upon Request
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content



LEAD FREE




## TRAA-BFF-Q

Automatic Balancing Valve, Fixed Venturi, Threaded Connection with Drain, Memory Stop, 400 WOG

PART NUMBER	SIZE
TRAA-BFF-Q	3/4"

- Dezincification Resistant Brass Alloy
- Cartridge Type Balancing Valve
- Equipped with Isolation Valve with Integrated Drain, and Inline Check Valve
- Patented Ball in Drain for Quarter-Turn Draining
- Design Flow Rate is 0.5 GPM; Other Flow Rates Available Upon Request
- 100% Pressure Tested
- 100% Made in Italy
- Wetted Surfaces Contain Less than .25% Lead Content



## TRAB-BFF-Q

Manual Balancing Valve, Fixed Venturi, Threaded Connection with Drain, 600 WOG

PART NUMBER	SIZE
TRAA-BFF-Q	3/4"

- Dezincification Resistant Brass Alloy
- Venturi Type Balancing Valve
- Equipped with Isolation Valve with Integrated Drain, and Inline Check Valve
- Patented Ball in Drain Quarter-Turn Draining
- Design Flow Rate is 0.4 – 2 GPM; Other Flow Rates Available Upon Request
- 100% Pressure Tested
- 100% Made in Italy
- Wetted Surfaces Contain Less than .25% Lead Content








**TB - FNPT**

Terminator B | Manual Balancing Valve, Quarter-Turn, Fixed Orifice, Threaded Connection, Union End, Integrated Ball Valve, Memory Stop, PT Ports, 600 WOG

PART NUMBER	SIZE
TB-AFF	1/2"
TB-BFF	3/4"
TB-CFF	1"
TB-DFF	1-1/4"
TB-EFF	1-1/2"
TB-FFF	2"

- +/- 2% Accuracy
- Positive Shut-Off
- Triple Sealing Stem with 2 Viton® O-Rings and Teflon Seal
- Blow-Out Proof Stem
- Patented Removable Venturi
- Two Pressure Test Ports
- Additional Accessory Tap
- Location Tag Available Upon Request
- 100% Leak Tested
- 100% Made in Italy
- NSF 61-8 & NSF 372 Certified
- Leakproof Stem – Lifetime Warranty

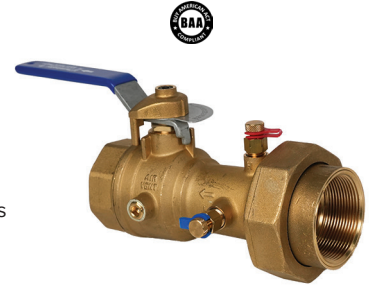


**TB - SWT**

Terminator B | Manual Balancing Valve, Quarter-Turn, Fixed Orifice, Solder Connection, Union End, Integrated Ball Valve, Memory Stop, PT Ports, 600 WOG

PART NUMBER	SIZE
TB-ACC	1/2"
TB-BCC	3/4"
TB-CCC	1"
TB-DCC	1-1/4"
TB-ECC	1-1/2"
TB-FCC	2"

- +/- 2% Accuracy
- Positive Shut-Off
- Triple Sealing Stem with 2 Viton® O-Rings and Teflon Seal
- Blow-Out Proof Stem
- Patented Removable Venturi
- Two Pressure Test Ports
- Additional Accessory Tap
- Location Tag Available Upon Request
- 100% Leak Tested
- 100% Made in Italy
- NSF 61-8 & NSF 372 Certified
- Leakproof Stem – Lifetime Warranty

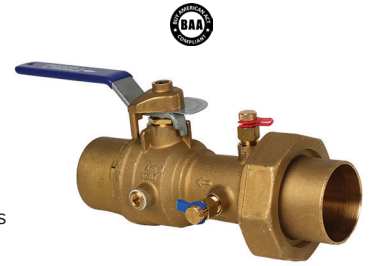

**TG - FNPT**

Terminator G | Manual Balancing Valve, Multi-Turn Globe Valve, Y-Pattern, Variable Orifice, Threaded Connection, Memory Stop, PT Ports, 300 WOG

PART NUMBER	SIZE	CARTON	WEIGHT
TG-AFF	1/2"	15	24
TG-BFF	3/4"	15	24
TG-CFF	1"	16	31
TG-DFF	1-1/4"	15	24
TG-EFF	1-1/2"	15	24
TG-FFF	2"	15	24

- +/- 5% Accuracy
- Positive Shut-Off
- Integral Metering Orifice Plate
- Two Pressure Test Ports
- Multi-Turn, 360° Handwheel with Vernier Scale and Digital Readouts
- Precise Flow Measurement and Flow Balancing
- 100% Leak Tested
- Conforms to BS 7350





## TG - SWT

Terminator G | Manual Balancing Valve, Multi-Turn Globe Valve, Y-Pattern, Variable Orifice, Solder Connection, Memory Stop, PT Ports, 300 WOG

PART NUMBER	SIZE	CARTON	WEIGHT
TG-ACC	1/2"	15	24
TG-BCC	3/4"	15	24
TG-CCC	1"	15	24
TG-DCC	1-1/4"	12	26
TG-ECC	1-1/2"	15	24
TG-FCC	2"	15	24

- +/- 5% Accuracy
- Positive Shut-Off
- Integral Metering Orifice Plate
- Two Pressure Test Ports
- Multi-Turn, 360° Handwheel with Vernier Scale and Digital Readouts
- Precise Flow Measurement and Flow Balancing
- 100% Leak Tested
- Conforms to BS 7350



## TG - Flanged

Terminator G | Manual Balancing Valve, Multi-Turn Globe Valve, Y-Pattern, Variable Orifice, Flanged Connection, Memory Stop, PT Ports, 230 WOG

PART NUMBER	SIZE
TG-GFF	2-1/2"
TG-HFF	3"
TG-IFF	4"
TG-KFF	6"
TG-LFF	8"
TG-MFF	10"
TG-NFF	12"

- +/- 5% Accuracy
- Positive Shut-Off
- Two Pressure Test Ports
- Precise Flow Management and Flow Balancing
- ANSI Class 150
- EN-558-1 Series 1
- Flange: ANSI B16.5
- Face-to-Face: DIN 3202-1/F1
- Conforms to BS 7350



## TG - Grooved

Terminator G | Manual Balancing Valve, Multi-Turn Globe Valve, Y-Pattern, Variable Orifice, Grooved Connection, Memory Stop, PT Ports, 230 WOG

PART NUMBER	SIZE
TG-GGG	2-1/2"
TG-HGG	3"
TG-IGG	4"
TG-KGG	6"
TG-LGG	8"
TG-MGG	10"
TG-NGG	12"

- +/- 5% Accuracy
- Positive Shut-Off
- Two Pressure Test Ports
- Multi-Turn, 360° Handwheel with Vernier Scale and Digital Readouts
- Precise Flow Measurement and Flow Balancing





**BUTTERFLY VALVES**



## BFV-Lug

Lug Style, Epoxy-Coated Ductile Iron Body, Stainless Steel Disc

PART NUMBER	SIZE	WEIGHT
600-02DS_L	2"	9.7
600-212DS_L	2-1/2"	11.02
600-03DS_L	3"	12.13
600-04DS_L	4"	18.3
600-05DS_L	5"	24.14
600-06DS_L	6"	26.14
600-08DS_B	8"	41.6
600-10DS_G	10"	77.16
600-12DS_G	12"	111.55
600-14DS_G	14"	154.32
600-16DS_G	16"	264.55
600-18DS_G	18"	326.28
600-20DS_G	20"	473.99
600-24DS_G	24"	650.36
600-30DS_G	30"	939.17
600-36DS_G	36"	1604.96

SEAT MATERIAL MUST BE INDICATED IN PART NUMBER WHEN ORDERING: (E) EPDM, (B) BUNA-N, (P) PTFE, (V) VITON®.

2"-6" INCLUDE (L) LEVER HANDLE; 8" INCLUDES (B) BARE STEM WITH OPERATOR SOLD SEPARATELY; 10"-36" INCLUDE (G) GEAR OPERATOR.

- Epoxy-Coated Finish
- EPDM, PTFE, Buna-N, or Viton® Seats Available
- Square Stem for Direct Mount
- Ideal for Mounting Pneumatic and Electrical Actuators
- Easily Accepts Actuator with ISO 5211 Mounting Flange
- Seat-to-Flange Seal Eliminates Need for Flange Gaskets
- Designed for Commercial, Industrial and Potable Water Applications up to 225 PSI
- Bidirectional for Dead End Service
- NSF 61 & NSF 372 Certified: 2"-24" (EPDM Seat Only)
- Meets API 609 & MSS SP-67
- Wetted Surfaces Contain Less than .25% Lead Content



## BFV-Wafer

Wafer Style, Epoxy-Coated Ductile Iron Body, Stainless Steel Disc

PART NUMBER	SIZE	WEIGHT
900-02DS_L	2"	7.71
900-212DS_L	2-1/2"	9.7
900-03DS_L	3"	10.36
900-04DS_L	4"	12.78
900-05DS_L	5"	17.2
900-06DS_L	6"	19.4
900-08DS_B	8"	33.22
900-10DS_G	10"	64.48
900-12DS_GV	12"	88.18
900-14DS_G	14"	116.84
900-16DS_G	16"	200.62
900-18DS_G	18"	220.46
900-20DS_G	20"	326.28
900-24DS_G	24"	518.09

SEAT MATERIAL MUST BE INDICATED IN PART NUMBER WHEN ORDERING: (E) EPDM, (B) BUNA-N, (P) PTFE, (V) VITON®.

2"-6" INCLUDE (L) LEVER HANDLE; 8" INCLUDES (B) BARE STEM WITH OPERATOR SOLD SEPARATELY; 10"-24" INCLUDE (G) GEAR OPERATOR.

- Epoxy-Coated Finish
- EPDM, PTFE, Buna-N, or Viton® Seats Available
- Square Stem for Direct Mount
- Ideal for Mounting Pneumatic and Electrical Actuators
- Easily Accepts Actuator with ISO 5211 Mounting Flange
- Seat-to-Flange Seal Eliminates Need for Flange Gaskets
- Designed for Commercial, Industrial and Potable Water Applications up to 225 PSI
- NSF 61 / NSF 372 Certified: 2"-24" (EPDM Seat Only)
- Meets API 609 & MSS SP-67
- Wetted Surfaces Contain Less than .25% Lead Content





### Lever Handle

Fits Resilient Seated Butterfly Valves, Ten Position, Lockable

PART NUMBER	SIZE	WEIGHT
BLH2-3	2"-3"	1.98
BLH4	4"	1.98
BLH5-6	5", 6"	4.29
BLH8	8"	5.84

- Ships Standard with BFV Sizes 2"-6"
- Can be Equipped to any BFV



### Gear Operator

Fits Resilient Seated Butterfly Valves

PART NUMBER	SIZE
BGO2-3	2"-3"
BGO4	4"
BGO5-6	5"-6"
BGO8	8"
BGO10	10"
BGO12-14	12"-14"
BGO16-18	16"-18"
BGO20	20"
BGO24	24"
BGO30	30"
BGO36	36"

- Ships Standard with BFV Sizes 10"-36"
- Can be Equipped to any BFV





## HPBFV Carbon Steel 150 Class

Lug Style, Carbon Steel Body, Stainless Steel Disc and Stem, Lever Handle or Gear Operator, ANSI Class 150

PART NUMBER	SIZE	WEIGHT
600-02H1CS_L	2"	10.80
600-212H1CS_L	2-1/2"	12.80
600-03H1CS_L	3"	14.10
600-04H1CS_L	4"	21.80
600-05H1CS_L	5"	27.10
600-06H1CS_L	6"	34.80
600-02H1CS_G	2"	17.00
600-212H1CS_G	2-1/2"	19.00
600-03H1CS_G	3"	20.40
600-04H1CS_G	4"	28.00
600-05H1CS_G	5"	33.30
600-06H1CS_G	6"	51.10
600-08H1CS_G	8"	62.70
600-10H1CS_G	10"	90.30
600-12H1CS_G	12"	135.50
600-14H1CSR	14"	-
600-16H1CSR	16"	-
600-18H1CSR	18"	-
600-20H1CSR	20"	-
600-24H1CSR	24"	-

SEAT MATERIAL MUST BE INDICATED IN PART NUMBER WHEN ORDERING: (R) RPTFE; (F) FIRE SAFE; (M) METAL.

2"-6" INCLUDE (L) LEVER HANDLE; 8"-24" INCLUDE (G) GEAR OPERATOR.

- Corrosion Resistant One-Piece Body
- RPTFE, Fire-Safe, or Metal Seats Available
- Bubble-Tight Shut-Off Design
- Durable One-Piece Stem
  - A564 Gr.630/17-4 PH® Materials
- ISO 5211 Mounting Pad
  - 2"-12" = Square Design
  - 14"-24" = Keyed Design
- Dual Offset Disc Design
- Internal Stop to Prevent Disc Over-Travel
- Tight Gland Packing Flange to Prevent Uneven Load Distribution
- Bidirectional for Dead End Service
- 29 in-Hg Vacuum Rating



## HPBFV Stainless Steel 150 Class

Lug Style, Stainless Steel Body, Stainless Steel Disc and Stem, Lever Handle or Gear Operator, ANSI Class 150

PART NUMBER	SIZE	WEIGHT
600-02H1SS_L	2"	10.80
600-212H1SS_L	2-1/2"	12.80
600-03H1SS_L	3"	14.10
600-04H1SS_L	4"	21.80
600-05H1SS_L	5"	27.10
600-06H1SS_L	6"	34.80
600-02H1SS_G	2"	17.00
600-212H1SS_G	2-1/2"	19.00
600-03H1SS_G	3"	20.40
600-04H1SS_G	4"	28.00
600-05H1SS_G	5"	33.30
600-06H1SS_G	6"	51.10
600-08H1SS_G	8"	62.70
600-10H1SS_G	10"	90.30
600-12H1SS_G	12"	135.50
600-14H1SSRG	14"	-
600-16H1SSRG	16"	-
600-18H1SSRG	18"	-
600-20H1SSRG	20"	-
600-24H1SSRG	24"	-

SEAT MATERIAL MUST BE INDICATED IN PART NUMBER WHEN ORDERING: (R) RPTFE; (F) FIRE SAFE; (M) METAL.

2"-6" INCLUDE (L) LEVER HANDLE; 8"-24" INCLUDE (G) GEAR OPERATOR.

- Corrosion Resistant One-Piece Body
- RPTFE, Fire-Safe, or Metal Seats Available
- Bubble-Tight Shut-Off Design
- Durable One-Piece Stem
  - A564 Gr.630/17-4 PH® Materials
- ISO 5211 Mounting Pad
  - 2"-12" = Square Design
  - 14"-24" = Keyed Design
- Dual Offset Disc Design
- Internal Stop to Prevent Disc Over-Travel
- Tight Gland Packing Flange to Prevent Uneven Load Distribution
- NSF 61 & NSF 372 Certified
- Bidirectional for Dead End Service
- 29 in-Hg Vacuum Rating



# HPBFV CARBON STEEL 300 CLASS



ISO 5211 MOUNTING PIECE



DURABLE ONE PIECE STEM



DOUBLE OFFSET DISC DESIGN



## HPBFV Carbon Steel 300 Class

Lug Style, Carbon Steel Body, Stainless Steel Disc and Stem, Lever Handle or Gear Operator, ANSI Class 300

PART NUMBER	SIZE	WEIGHT
600-02H3CSRL	2"	10.6
600-212H3CSRL	2-1/2"	15.7
600-03H3CSRL	3"	16.1
600-04H3CSRL	4"	21.8
600-02H3CSRG	2"	15.2
600-0212H3CSRG	2-1/2"	19.8
600-03H3CSRG	3"	22.5
600-04H3CSRG	4"	28.0
600-05H3CSRG	5"	36.2
600-06H3CSRG	6"	57.5
600-08H3CSRG	8"	80.0
600-10H3CSRG	10"	109.6
600-12H3CSRG	12"	182.1

2"-4" INCLUDE (L) LEVER HANDLE; 8"-12" INCLUDE (G) GEAR OPERATOR.

- Corrosion Resistant One-Piece Body
- RPTFE Seat
- Bubble-Tight Shut-Off Design
- Durable One-Piece Stem
  - A564 Gr.630/17-4 PH® Materials
- ISO 5211 Mounting Pad
  - 2"-12" = Square Design
- Dual Offset Disc Design
- Internal Stop to Prevent Disc Over-Travel
- Tight Gland Packing Flange to Prevent Uneven Load Distribution
- Bidirectional for Dead End Service
- 29 in-Hg Vacuum Rating





## HPBFV Stainless Steel 300 Class

Lug Style, Stainless Steel Body, Stainless Steel Disc and Stem, Lever Handle or Gear Operator, ANSI Class 300

PART NUMBER	SIZE	WEIGHT
600-02H3SSRL	2"	10.6
600-212H3SSRL	2-1/2"	15.7
600-03H3SSRL	3"	16.1
600-04H3SSRL	4"	21.8
600-02H3SSRG	2"	10.6
600-212H3SSRG	2-1/2"	15.7
600-03H3SSRG	3"	16.1
600-04H3SSRG	4"	21.8
600-05H3SSRG	5"	36.2
600-06H3SSRG	6"	57.5
600-08H3SSRG	8"	80.0
600-10H3SSRG	10"	109.6
600-12H3SSRG	12"	182.1

2"-4" INCLUDE (L) LEVER HANDLE; 8"-12" INCLUDE (G) GEAR OPERATOR.

- Corrosion Resistant One-Piece Body
- RPTFE Seat
- Bubble-Tight Shut-Off Design
- Durable One-Piece Stem
  - A564 Gr.630/17-4 PH® Materials
- ISO 5211 Mounting Pad
  - 2"-12" = Square Design
- Dual Offset Disc Design
- Internal Stop to Prevent Disc Over-Travel
- Tight Gland Packing Flange to Prevent Uneven Load Distribution
- NSF 61 & NSF 372 Certified
- Bidirectional for Dead End Service
- 29 in-Hg Vacuum Rating



## HPBFV Lever Handle

Fits High Performance Butterfly Valves, Ten Position, Lockable

PART NUMBER	SIZE
HPBFV 150 CLASS	
HPLH2	2"
HPLH2.5-5	2-1/2", 3", 4", 5"
HPLH6	6"
HPBFV 300 CLASS	
HPLH2	2"
HPLH2.5-5	2-1/2", 3", 4"

- Ships Standard with HPBFV Sizes 2"-4"
- Can be Equipped to any HPBFV
- Ergonomic Grip Design



## HPBFV Lever Handle

Fits High Performance Butterfly Valves, Stainless Steel, Ten Position, Lockable

PART NUMBER	SIZE
HPBFV 150 CLASS	
HPLH2SS	2"
HPLH2.5-5SS	2-1/2", 3", 4", 5"
HPLH6SS	6"
HPBFV 300 CLASS	
HPLH2SS	2"
HPLH2.5-5SS	2-1/2", 3", 4"

- Can be Equipped to any HPBFV
- Ergonomic Grip Design







## HPBGO Gear Operator

Fits High Performance Butterfly Valves

PART NUMBER	SIZE	WEIGHT
HPBFV 150 CLASS		
HPBGO2	2"	9
HPLH2.5-5	2.5"- 5"	9
HPBGO6-8	6"-8"	18
HPBGO10	10"	19
HPBGO12	12"	25
HPBGO14	14"	30
HPBGO16	16"	59
HPBFV 300 CLASS		
HPBGO2	2"	9
HPBGO2.5-5	2.5"-5"	9
HPBGO6-8	6"	18
HPBGO10	8"-10"	19
HPBGO12	12"	25

- Ships Standard with HPBFV Sizes 8" - 12"
- Can be Equipped to any HPBFV







# GATES, CHECKS, & STRAINERS



## T-351G

Rising Stem, Solid Wedge, Threaded Connection, 300 CWP

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-353G	1/2"	6	84	30
103-354G	3/4"	5	50	26
103-355G	1"	5	40	32
103-356G	1-1/4"	4	32	35
103-357G	1-1/2"	4	16	24
103-358G	2"	3	12	29

- Dezincification Resistant Bronze
- Solid Wedge Gate with Rising Stem
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



## S-351G

Rising Stem, Solid Wedge, Solder Connection, 300 CWP

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-453G	1/2"	6	84	27
103-454G	3/4"	5	50	24
103-455G	1"	5	40	30
103-456G	1-1/4"	4	32	33
103-457G	1-1/2"	4	16	23
103-458G	2"	3	12	28

- Dezincification Resistant Bronze
- Solid Wedge Gate with Rising Stem
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content





**T-301G**

Non-Rising Stem, Solid Wedge, Threaded Connection, 200 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-303G	1/2"	120	10	72
103-304G	3/4"	90	10	77
103-305G	1"	40	5	48
103-306G	1-1/4"	40	5	74
103-307G	1-1/2"	32	4	72
103-308G	2"	20	2	57

- Dezincification Resistant Brass Alloy
- Solid Wedge Gate with Non-Rising Stem
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**S-301G**

Non-Rising Stem, Solid Wedge, Solder Connection, 200 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-403G	1/2"	120	10	72
103-404G	3/4"	90	10	77
103-405G	1"	40	5	48
103-406G	1-1/4"	40	5	74
103-407G	1-1/2"	32	4	72
103-408G	2"	20	2	68

- Dezincification Resistant Brass Alloy
- Solid Wedge Gate with Non-Rising Stem
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content





## T-301

Non-Rising Stem, Solid Wedge, Threaded Connection, 200 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-301	1/4"	120	10	58
103-302	3/8"	120	10	68
103-303	1/2"	120	10	48
103-304	3/4"	90	10	77
103-305	1"	60	5	48
103-306	1-1/4"	40	5	74
103-307	1-1/2"	32	4	54
103-308	2"	20	2	54
103-309	2-1/2"	12	2	88
103-310	3"	8	1	81
103-311	4"	2	1	27

- Solid Wedge Gate with Non-Rising Stem
- Residential and Commercial Applications



## S-301

Non-Rising Stem, Solid Wedge, Solder Connection, 200 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-403	1/2"	120	10	72
103-404	3/4"	90	10	77
103-405	1"	60	5	72
103-406	1-1/4"	40	5	74
103-407	1-1/2"	32	4	72
103-408	2"	20	2	68
103-409	2-1/2"	12	2	88
103-410	3"	8	1	81

- Solid Wedge Gate with Non-Rising Stem
- Residential and Commercial Applications





**F-351**

Non-Rising Stem, Solid Wedge, Bolted Bonnet, 125 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-525	2-1/2"	1	1	44
103-503	3"	1	1	55
103-504	4"	1	1	99
103-506	6"	1	1	183
103-508	8"	1	1	249

- Solid Wedge with Non-Rising Stem
- Handwheel Operated
- Bonnet & Disc
- Lead Free Bronze Seat Ring
- Pressure Rating: Class 125
- Conforms to MSS SP-70
- Flange: ASME B16.1
- Face-to-Face: ANSI/ASME B16.10
- Lead Free Compliant



**F-361**

Rising Stem, Solid Wedge, Bolted Bonnet, OS&Y, 125 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
103-625	2-1/2"	1	1	48
103-603	3"	1	1	59
103-604	4"	1	1	105
103-606	6"	1	1	194
103-608	8"	1	1	272
103-610	10"	1	1	438
103-612	12"	1	1	608

- Solid Wedge with Rising Stem
- Handwheel Operated
- Bonnet & Disc
- Lead Free Bronze Seat Ring
- Pressure Rating: Class 125
- Conforms to MSS SP-70
- Flange: ASME B16.1
- Face-to-Face: ANSI/ASME B16.10
- Lead Free Compliant





**T-511G**

Swing, Y-Pattern, Threaded Connection, 300 WOG, 150 Class



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-303G	1/2"	60	10	34
105-304G	3/4"	40	10	36
105-305G	1"	30	10	40
105-306G	1-1/4"	20	5	39
105-307G	1-1/2"	16	4	41
105-308G	2"	8	2	32

- Dezincification Resistant Bronze
- Can be Installed in Vertical or Horizontal Positions
- Residential and Commercial Applications
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**S-511G**

Swing, Y-Pattern, Solder Connection, 300 WOG, 150 Class



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-403G	1/2"	60	10	31
105-404G	3/4"	40	10	36
105-405G	1"	30	10	41
105-406G	1-1/4"	20	5	41
105-407G	1-1/2"	16	4	41
105-408G	2"	8	2	34

- Dezincification Resistant Bronze
- Can be Installed in Vertical or Horizontal Positions
- Residential and Commercial Applications
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content





**T-521G**

Inline, Threaded Connection, 300 WOG, 150 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-603G	1/2"	100	25	33
105-604G	3/4"	128	16	52
105-605G	1"	96	12	62
105-606G	1-1/4"	36	9	39
105-607G	1-1/2"	32	8	38
105-608G	2"	16	4	36

- Dezincification Resistant Brass Alloy
- Forged Lead Free Brass Body
- Can be Installed in Vertical or Horizontal Positions
- Bubble-Tight Teflon Seal
- IAPMO Certified - NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**S-521G**

Inline, Solder Connection, 300 WOG, 150 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-613G	1/2"	100	25	33
105-614G	3/4"	128	16	54
105-615G	1"	96	12	60
105-616G	1-1/4"	48	6	52
105-617G	1-1/2"	32	4	40
105-618G	2"	16	2	42

- Dezincification Resistant Brass Alloy
- Forged Lead Free Brass Body
- Can be Installed in Vertical or Horizontal Positions
- Bubble-Tight Teflon Seal
- IAPMO Certified - NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**P-521G**

Inline, Press Connection, 300 WOG, 150 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-623G	1/2"	120	20	35
105-624G	3/4"	96	8	42
105-625G	1"	68	17	36
105-626G	1-1/4"	32	4	31
105-627G	1-1/2"	24	3	38
105-628G	2"	18	3	40

- Dezincification Resistant Brass Alloy
- Forged Lead Free Brass Body
- Can be Installed in Vertical or Horizontal Positions
- Bubble-Tight Teflon Seal
- IAPMO Certified - NSF 61 & NSF 372
- ASME B16.51
- Wetted Surfaces Contain Less than .25% Lead Content



**E-521G**

Inline, Expansion Pex Connection, 300 WOG, 150 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-633G	1/2"	80	20	33
105-634G	3/4"	80	20	33
105-635G	1"	72	18	33

- Dezincification Resistant Brass Alloy
- Forged Lead Free Brass Body
- Can be Installed in Vertical or Horizontal Positions
- Bubble-Tight Teflon Seal
- IAPMO Certified - NSF 61 & NSF 372
- ASTM F1960
- Wetted Surfaces Contain Less than .25% Lead Content





## T-501G

Horizontal Swing, Threaded Connection, 200 WOG, 125 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-103G	1/2"	120	10	54
105-104G	3/4"	100	10	47
105-105G	1"	72	6	60
105-106G	1-1/4"	60	5	59
105-107G	1-1/2"	32	4	54
105-108G	2"	20	2	55
105-109G	2-1/2"	12	2	58
105-110G	3"	6	1	43
105-111G	4"	4	1	43

- Dezincification Resistant Brass Alloy
- Residential and Commercial Applications
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



## S-501G

Horizontal Swing, Solder Connection, 200 WOG, 125 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-203G	1/2"	120	10	48
105-204G	3/4"	100	10	60
105-205G	1"	72	6	63
105-206G	1-1/4"	40	5	59
105-207G	1-1/2"	32	4	57
105-208G	2"	24	2	70
105-209G	2-1/2"	10	1	48
105-210G	3"	8	1	54

- Dezincification Resistant Brass Alloy
- Residential and Commercial Applications
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



## P-501G

Horizontal Swing, Press Connection, 200 WOG, 125 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-003G	1/2"	160	10	68
105-004G	3/4"	120	10	77
105-005G	1"	60	5	51
105-006G	1-1/4"	40	5	45
105-007G	1-1/2"	30	5	53
105-008G	2"	24	2	62

- Dezincification Resistant Brass Alloy
- Residential and Commercial Applications
- One-Piece Body Design
- Heavy Pattern Cast Brass Construction
- EPDM O-Ring Seal
- Metal-to-Metal Disc Seal
- Truesdail Certified – NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content





**T-511**

Swing, Y-Pattern, Threaded Connection, 300 WOG, 150 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-303	1/2"	60	10	62
105-304	3/4"	40	10	37
105-305	1"	30	10	40
105-306	1-1/4"	20	5	39
105-307	1-1/2"	16	4	43
105-308	2"	8	2	33
105-309	2-1/2"	6	1	55
105-310	3"	4	1	49

- Can be Installed in Vertical or Horizontal Positions
- Residential and Commercial Applications
- Sizes 2-1/2" - 3" Buy American Act Compliant



**S-511**

Swing, Y-Pattern, Solder Connection, 300 WOG, 150 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-403	1/2"	60	10	36
105-404	3/4"	40	10	35
105-405	1"	30	10	38
105-406	1-1/4"	20	5	44
105-407	1-1/2"	16	4	43
105-408	2"	8	2	34
105-409	2-1/2"	6	1	49
105-410	3"	4	1	47

- Can be Installed in Vertical or Horizontal Positions
- Residential and Commercial Applications
- Sizes 2-1/2" - 3" Buy American Act Compliant





## T-501

Horizontal Swing, Threaded Connection, 200 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-103	1/2"	120	10	53
105-104	3/4"	100	10	59
105-105	1"	72	6	60
105-106	1-1/4"	40	5	59
105-107	1-1/2"	32	4	54
105-108	2"	24	2	56
105-109	2-1/2"	12	2	57
105-110	3"	6	1	42
105-111	4"	4	1	44

- Residential and Commercial Applications



## S-501

Horizontal Swing, Solder Connection, 200 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-203	1/2"	120	15	47
105-204	3/4"	100	10	57
105-205	1"	72	6	59
105-206	1-1/4"	32	5	52
105-207	1-1/2"	32	4	54
105-208	2"	20	2	58

- Residential and Commercial Applications



## T-550

Stainless Steel, Swing, Threaded Connection, 200 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-803	1/2"	66	1	71
105-804	3/4"	48	1	1
105-805	1"	30	1	1
105-806	1-1/4"	24	1	2
105-807	1-1/2"	14	1	3
105-808	2"	4	1	5

- One-Piece Body Design
- Heavy Pattern Body
- PTFE O-Ring Seal
- Metal-to-Metal Disc Seal





**F-571**

Horizontal Swing, Bolted Bonnet, 125 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-725	2-1/2"	1	1	24
105-703	3"	1	1	44
105-704	4"	1	1	78
105-706	6"	1	1	152
105-708	8"	1	1	259
105-710	10"	1	1	417
105-712	12"	1	1	615

- Bonnet & Disc
- Lead Free Bronze Seat Ring
- Pressure Rating: Class 125
- Conforms to MSS SP-71
- Flange: ASME B16.1
- Face-to-Face: ANSI/ASME B16.10
- Lead Free Compliant



**F-591**


Wafer Style, Double Door, 125 Class

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
105-925	2-1/2"	1	1	5
105-903	3"	1	1	8
105-904	4"	1	1	9
105-906	6"	1	1	20
105-908	8"	1	1	33
105-910	10"	1	1	56
105-912	12"	1	1	90


- Aluminum Bronze Disc
- Stainless Steel Stem
- Pressure Rating: Class 125
- Lead Free Compliant



# T-651G

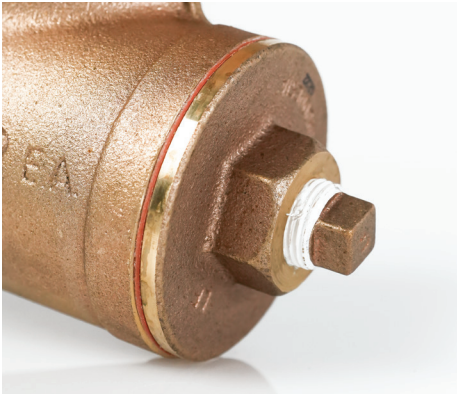

FNPT PLUGGED CAP

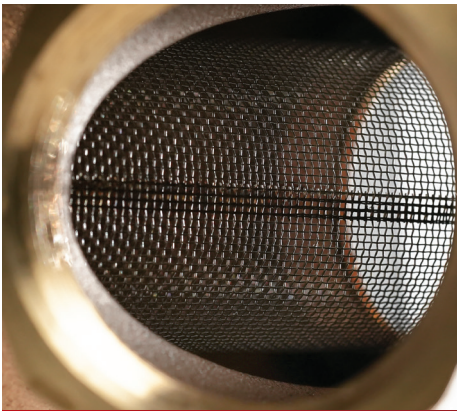

304 STAINLESS STEEL MESH SCREEN



## T-651G

Y-Strainer, Threaded Connection, 20 Stainless Steel Mesh, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
106-303G	1/2"	48	12	34
106-304G	3/4"	32	8	39
106-305G	1"	16	8	30
106-306G	1-1/4"	12	6	34
106-307G	1-1/2"	12	2	44
106-308G	2"	8	2	48
106-309G	2-1/2"	4	1	40
106-310G	3"	4	1	30

- Dezincification Resistant Bronze
- Residential and Commercial Applications
- 1/2"-3/4": 3/8" FNPT Plugged Cap
- 1"-3": 1/2" FNPT Plugged Cap
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



## S-651G

Y-Strainer, Solder Connection, 20 Stainless Steel Mesh, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
106-403G	1/2"	48	12	34
106-404G	3/4"	32	8	37
106-405G	1"	16	8	27
106-406G	1-1/4"	12	6	31
106-407G	1-1/2"	12	2	42
106-408G	2"	8	2	45

- Dezincification Resistant Bronze
- Residential and Commercial Applications
- 1/2" - 3/4" have 3/8" FNPT Plugged Cap
- 1" - 2" have 1/2" FNPT Plugged Cap
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content





**F-651**

Y-Strainer, Bolted Bonnet, Stainless Steel Screen, 125 Class

LEAD FREE

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
106-625	2-1/2"	1	1	22
106-603	3"	1	1	28
106-604	4"	1	1	36
106-606	6"	1	1	73
106-608	8"	1	1	123
106-610	10"	1	1	291
106-612	12"	1	1	454

- Bolted Bonnet
- 1/4" NPT Test Plug Upstream and Downstream
- Flange: ASME B16.1
- Pressure Rating: Class 125









# ACTUATION



## AE Series

Electric Actuator, Double Acting, NEMA 4X, Manual Override



AE-180



AE-350



AE-700



AE-700M



AE-880



AE-880M



AE-1400/M-9700/M

PART NUMBER	TORQUE	VOLTAGE	CYCLE TIME
120VAC			
AE-180-120-12	180	120	12
AE-350	350	120	13
AE-700 Ⓢ	700	120	14
AE-880 Ⓢ	880	120	21
AE-1400 Ⓢ	1400	120	26
AE-2100 Ⓢ	2125	120	26
AE-3100 Ⓢ	3098	120	31
AE-4400 Ⓢ	4425	120	31
AE-7000 Ⓢ	7080	120	39
AE-9700 Ⓢ	9735	120	39
120VAC - MODULATING			
AE-700M	700	120	14
AE-880M	880	120	21
AE-1400M	1400	120	26
AE-2100M	2125	120	26
AE-3100M	3098	120	31
AE-4400M	4425	120	31
AE-7000M	7080	120	39
AE-9700M	9735	120	39

PART NUMBER	TORQUE	VOLTAGE	CYCLE TIME
24VAC			
AE-180-24VAC	180	24	12
AE-700-24VAC	700	24	14
AE-880-24VAC	880	24	26
AE-1400-24VAC	1400	24	26
AE-2100-24VAC	2125	24	26
AE-3100-24VAC	3098	24	31
AE-4400-24VAC	4425	24	31
AE-7000-24VAC	7080	24	39
AE-9700-24VAC	9735	24	39
24VDC			
AE-180-24VDC	180	24	12
AE-350-24VDC	350	24	12
AE-700-24VDC	700	24	12
AE-880-24VDC	880	24	18
AE-1400-24VDC	1400	24	33
AE-2100-24VDC	2125	24	33
AE-3100-24VDC	3098	24	37
AE-4400-24VDC	4425	24	34
AE-7000-24VDC	7080	24	39
AE-9700-24VDC	9735	24	39

- Hard Anodized Aluminum Housing with External Powder Coating for Severe Duty Applications
- 90° Operation
- Enclosure: IP67 (NEMA 4, 4X)
- ISO 5211 Mounting Pad
- Worm Gearing, No Brake Required
- Standard Manual Override
- Torque Switches for Overload Protection (not including AE-180)
- Squirrel Cage Induction Motor
- Duty Cycle: 50%
- 4 Limit Switches (AE-180: QTY 2)
- Cable Entries: 3/4" NPT / M20 x 1.5
- 5W Internal Heater (AE-350 and larger)
- Terminal Block for Wiring Ease
- Position Indicator
- Standard Adjustable Travel Stops
- Temperature Range:
  - AE-180: -22°F to 140°F
  - AE-350 and larger: -4°F to 158°F

CSA applies to models AE-880, AE-1400, AE-2100, AE-3100, AE-4400, AE-7000, AE-9700 only:  
 C22.2 No. 139-1982, 77-95, 100-04, UL429, UL2111, UL1004, 0-M91, 94.1-07, 94.2-07, 30-M1986, 25-1966, 1399-1982, 60529-05, 60079-0-07, 60079-1-07, ANSI/UL 429, 50E, 50, 1002, IEC 60529, 60079-0, 60079-1, and ANSI/UL 1203.



## JV Series

Pneumatic Actuator, Rotary Rack, Pinion Design, Dual Travel Stops



DOUBLE ACTING/SPRING RETURN



WITH OPTIONAL SOLENOID VALVE

PART NUMBER	SQ	ISO	TORQUE			
			40 PSI	60 PSI	80 PSI	100 PSI
DOUBLE ACTING						
JV-50-DA	0.43	F03/05	90	135	180	225
JV-60-DA	0.55	F05/07	183	274	365	457
JV-70-DA	0.55	F05/07	284	426	567	7099
JV-80-DA	0.67	F05/07	416	625	833	1041
JV-90-DA	0.67	F05/07	585	878	1170	1483
JV-100-DA	0.87	F07/10	785	1177	1589	1961
JV-120-DA	0.87	F07/10	1351	2026	2702	3377
JV-140-DA	1.06	F10/12	1695	2542	3389	4236
JV-160-DA	1.06	F10/12	2767	4150	5533	6917
JV-190-DA	1.42	F14	4552	6827	9103	11379
JV-200-DA	1.42	F14	5719	8579	11438	14298
JV-240-DA	1.81	F16	1132	15197	20263	25329
JV-270-DA	1.81	F16	12709	19064	25418	31773
JV-300-DA	1.81	F16	17832	26747	35663	44579
PART NUMBER	SQ	ISO	TORQUE (80 PSI, 11 SPRINGS)			
			AIR START	SPRING END		
SPRING RETURN						
JV-50-SR	0.43	F03/05	109	71		
JV-60-SR	0.55	F05/07	221	144		
JV-70-SR	0.55	F05/07	344	223		
JV-80-SR	0.67	F05/07	505	328		
JV-90-SR	0.67	F05/07	709	461		
JV-100-SR	0.87	F07/10	951	618		
JV-120-SR	0.87	F07/10	1638	1064		
JV-140-SR	1.06	F10/12	2054	1335		
JV-160-SR	1.06	F10/12	3354	2179		
JV-190-SR	1.42	F14	5518	2585		
JV-200-SR	1.42	F14	6934	4504		
JV-240-SR	1.81	F16	12284	7979		
JV-270-SR	1.81	F16	15409	10009		
JV-300-SR	1.81	F16	21620	14043		

- Hard Anodized Extruded Aluminum Body Construction with Internal/External Corrosion Protection
- Blow-Out Proof Output Shaft
- Manufactured to Fully Conform to ISO5211 and DIN3337
- Manufactured with Silicone-Free Lubricants
- Precision-Honed Cylinder Surfaces for Longer Life and Low Coefficient of Friction
- Dual Rack and Piston Design with Multiple Bearings and Guides
- Precisely Machined Pistons and Pinions
- O-Ring Sealed to Prevent Outside Contamination
- Stainless Steel Fasteners
- Namur Interface Mounting of Solenoid Valves, Limit Switches, Positioners
- Standard Travel Stops
- Torque Range:
  - Double Acting: Up to 388,762 in/lb
  - Spring Return: Up to 257,836 in/lb



## A101

Lead Free Brass, 2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, ISO Mounting Pad, 600 WOG

PART NUMBER	SIZE
A101-12	1/2"
A101-34	3/4"
A101-1	1"
A101-114	1-1/4"
A101-112	1-1/2"
A101-2	2"

- Dezincification Resistant Brass Alloy
- ISO 5211 Direct Mounting Pad
- Square Valve Stem for Direct Mounting to any ISO Actuator
- Latch Lock May be Locked in Open or Closed Position
- Blow-Out Proof Stem
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content



## A-751T/L

Brass, 3-Way, Standard Port, T or L Port, Threaded Connection, ISO Mounting Pad, 400 WOG

PART NUMBER	PART NUMBER	SIZE
T-PORT	L-PORT	
A751T-14*	A751L-14	1/4"
A751T-38*	A751L-38	3/8"
A751T-12	A751L-12	1/2"
A751T-34	A751L-34	3/4"
A751T-1	A751L-1	1"
A751T-114	A751L-114	1-1/4"
A751T-112	A751L-112	1-1/2"
A751T-2	A751L-2	2"
A751T-212	A751L-212*	2-1/2"
A751T-3	A751L-3*	3"

- ISO 5211 Direct Mounting Pad
- Square Valve Stem for Direct Mounting to any ISO Actuator
- Four Seats Standard
- Blow-Out Proof Stem
- Ships with Lever Handle



## Mounting Bracket

ISO 5211 Mounting Pad for Electric and Pneumatic Actuators

PART NUMBER	SIZE
A1B-A1C11	1/4" - 1/2"
A2B-A2C11	3/4"
A3B-A3C11	1", 1-1/4"
A4B-A4C14	1-1/2", 2"
FABRICATED	2-1/2" - 4"






**A1000**

Stainless Steel, 3 Piece 4 Bolt, Swing Out Body, Full Port, Threaded Connection, ISO Mounting Pad, 1000 WOG

PART NUMBER	SIZE
A1000-14	1/4"
A1000-38	3/8"
A1000-12	1/2"
A1000-34	3/4"
A1000-1	1"
A1000-114	1-1/4"
A1000-112	1-1/2"
A1000-2	2"
A1000-212	2-1/2"
A1000-3	3"
A1000-4	4"

- Adjustable Stem Packing
- ISO 5211 Mounting Pad
- Blow-Out Proof Stem
- Wetted Surfaces Contain Less than .25% Lead Content

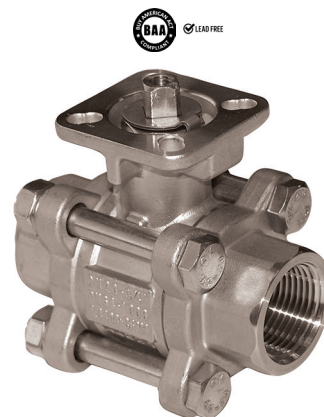

**A1001**

Stainless Steel, 3 Piece 4 Bolt, Full Port, Threaded Connection, ISO Mounting Pad, 1000 WOG

PART NUMBER	SIZE
A1001-14	1/4"
A1001-38	3/8"
A1001-12	1/2"
A1001-34	3/4"
A1001-1	1"
A1001-114	1-1/4"
A1001-112	1-1/2"
A1001-2	2"

- Adjustable Stem Packing
- ISO 5211 Direct Mounting Pad
- Locking Device May be Locked in Open or Closed Position
- Blow-Out Proof Stem
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content




**A2020D**

Stainless Steel, 2 Piece, Full Port, Flanged Connection, ISO Mounting Pad, 150 Class

PART NUMBER	SIZE
A2020D-12	1/2"
A2020D-34	3/4"
A2020D-1	1"
A2020D-114	1-1/4"
A2020D-112	1-1/2"
A2020D-2	2"
A2020D-212	2-1/2"
A2020D-3	3"
A2020D-4	4"

- Locking Device Comes Standard
- ISO 5211 Direct Mounting Pad
- Blow-Out Proof Stem
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content

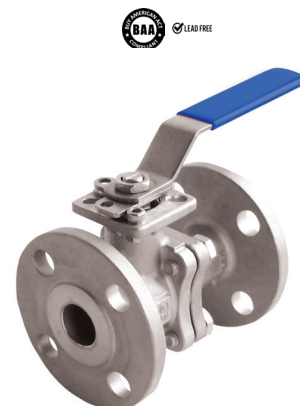



## A-850T/L

3-Way, Full Port, T or L Port, Threaded Connection, ISO Mounting Pad, 1000 WOG

PART NUMBER	PART NUMBER	SIZE
T-PORT	L-PORT	
A850T-14	A850L-14	1/4"
A850T-38	A850L-38	3/8"
A850T-12	A850L-12	1/2"
A850T-34	A850L-34	3/4"
A850T-1	A850L-1	1"
A850T-114	A850L-114	1-1/4"
A850T-112	A850L-112	1-1/2"
A850T-2	A850L-2	2"

- Self Adjusting Stem Packing
- ISO 5211 Mounting Pad
- Locking Device May be Locked in Open or Closed Position
- Four Seat Standard
- Temperature Range: -20°F to 450°F
- Blow-Out Proof Stem
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content



## A-766T/L

3-Way, Full Port, T or L Port, Flanged Connection, ISO Mounting Pad, 150 Class

PART NUMBER	PART NUMBER	SIZE
T-PORT	L-PORT	
A766T-12	A766L-12	1/4"
A766T-34	A766L-34	3/8"
A766T-1	A766L-1	1/2"
A766T-112	A766L-112	3/4"
A766T-2	A766L-2	1"
A766T-212	A766L-212	1-1/4"
A766T-3	A766L-3	1-1/2"
A766T-4	A766L-4	2"

- AISI 316 Stainless Steel
- ANSI 150 Flanged
- Max Temp: 344°F
- Blow-Out Proof Stem
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content






**ASV**

Four Way Solenoid Valve

PART NUMBER	DESCRIPTION
SOLENOID VALVES	
ASV-120	120VAC
ASV-120VAC-N7	120VAC EXPLOSION PROOF
ASV61-24VDC	24VDC
ASV-24VDC-N7	24VDC EXPLOSION PROOF
SOLENOID COILS	
ASC-120VAC	120VAC
ASC-120VAC-XP	120VAC EXPLOSION PROOF
ASC-12VDC	12VDC
ASC-240VAC	240VAC
ASC-24VAC	24VAC
ASC-24VDC	24VDC
ASC-24VDC-XP	24VDC EXPLOSION PROOF

- Extruded Aluminum Body with NBR Seal
- 120/60/1 Coil with IP 67 Rating
- Manual Override
- 1/4" NPT Exhaust Port
- 1/2" NPT Conduit Connection
- Operating Temp: -40°F to 140°F
- Operating Pressure: 20 - 120 PSI

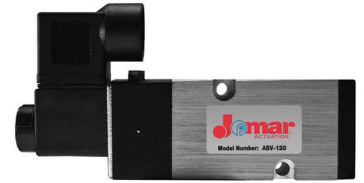

**ASM**

Limit Switch with Dome Indicator

PART NUMBER	DESCRIPTION
ASM-200	LIMIT SWITCH, 2 SPDT
ASM-400	LIMIT SWITCH, 4 SPDT
ASM-X-200	EXPLOSION PROOF, EEXED IIB T6
MT1	ADJUSTABLE BRACKET (NAMUR)

- Die-Cast Aluminum, Epoxy Polyester Coated Housing
- Stainless Steel Mounting Bracket made to NAMUR
- O-Ring Sealed to Prevent Contaminants from Entering Switch Compartment
- Position Indicator Manufactured of High-Impact Polycarbonate:  
Yellow = Open / Red = Closed
- Mechanical Switches are SPDT Design
- Eight Position Terminal Strip Included
- Enclosure is IP 67 Weatherproof Design
- Two 1/2" NPT Cable Entries



**AEP**

Electro-Pneumatic Rotary Positioner

PART NUMBER	DESCRIPTION
AEP-100	ELECTRO-PNEUMATIC MITT

- Aluminum Housing Construction
- Visual Position Indicator
- Enclosure: IP66 | Input: 4-20mA
- Supply: 20-100 PSI
- Impedance: 250 OHM ± 15 OHM
- Linearity: ±1% / ±2% FS
- Operating Temperature: -4°F to 158°F
- Repeatability: ±0.5% FS | Hysteresis: ±1% F
- Flow Capacity: 80 LPM
- Air Consumption: 3 LPM
- Weight: 6.5 LB
- Explosion Proof Approval: ExdII BT6
- Signal: 1/2" Conduit
- Connections: 1/4" Air / 1/8" Gauge
- For Use With 1/4-Turn Rotary Actuators





**APP**

Pneumatic Rotary Positioner

PART NUMBER	DESCRIPTION
APP-200	PNEUMATIC

- Aluminum Housing Construction
- Visual Position Indicator
- Input: 3-15 PSI
- Supply: 20-100 PSI
- Linearity:  $\pm 2\%$  FS
- Operating Temperature:  $-4^{\circ}\text{F}$  to  $158^{\circ}\text{F}$
- Repeatability:  $\pm 0.5\%$  FS
- Hysteresis:  $\pm 1\%$  FS
- Flow Capacity: 80 LPM
- Air Consumption: 3 LPM
- Weight: 3.7 LB
- Enclosure: IP66
- Connections: 1/4" air / 1/8" Gauge
- For Use With 1/4-Turn Rotary Actuators




**Specialty Valves & Retrofitting Actuators**

Jomar Valve can order specialty valves not offered in our main product catalog. We are also able to retrofit valves already installed out in the field.

Contact us at 586.268.1220 or [csr@jomar.com](mailto:csr@jomar.com) to coordinate your custom project with a Jomar Valve Actuation Technician.



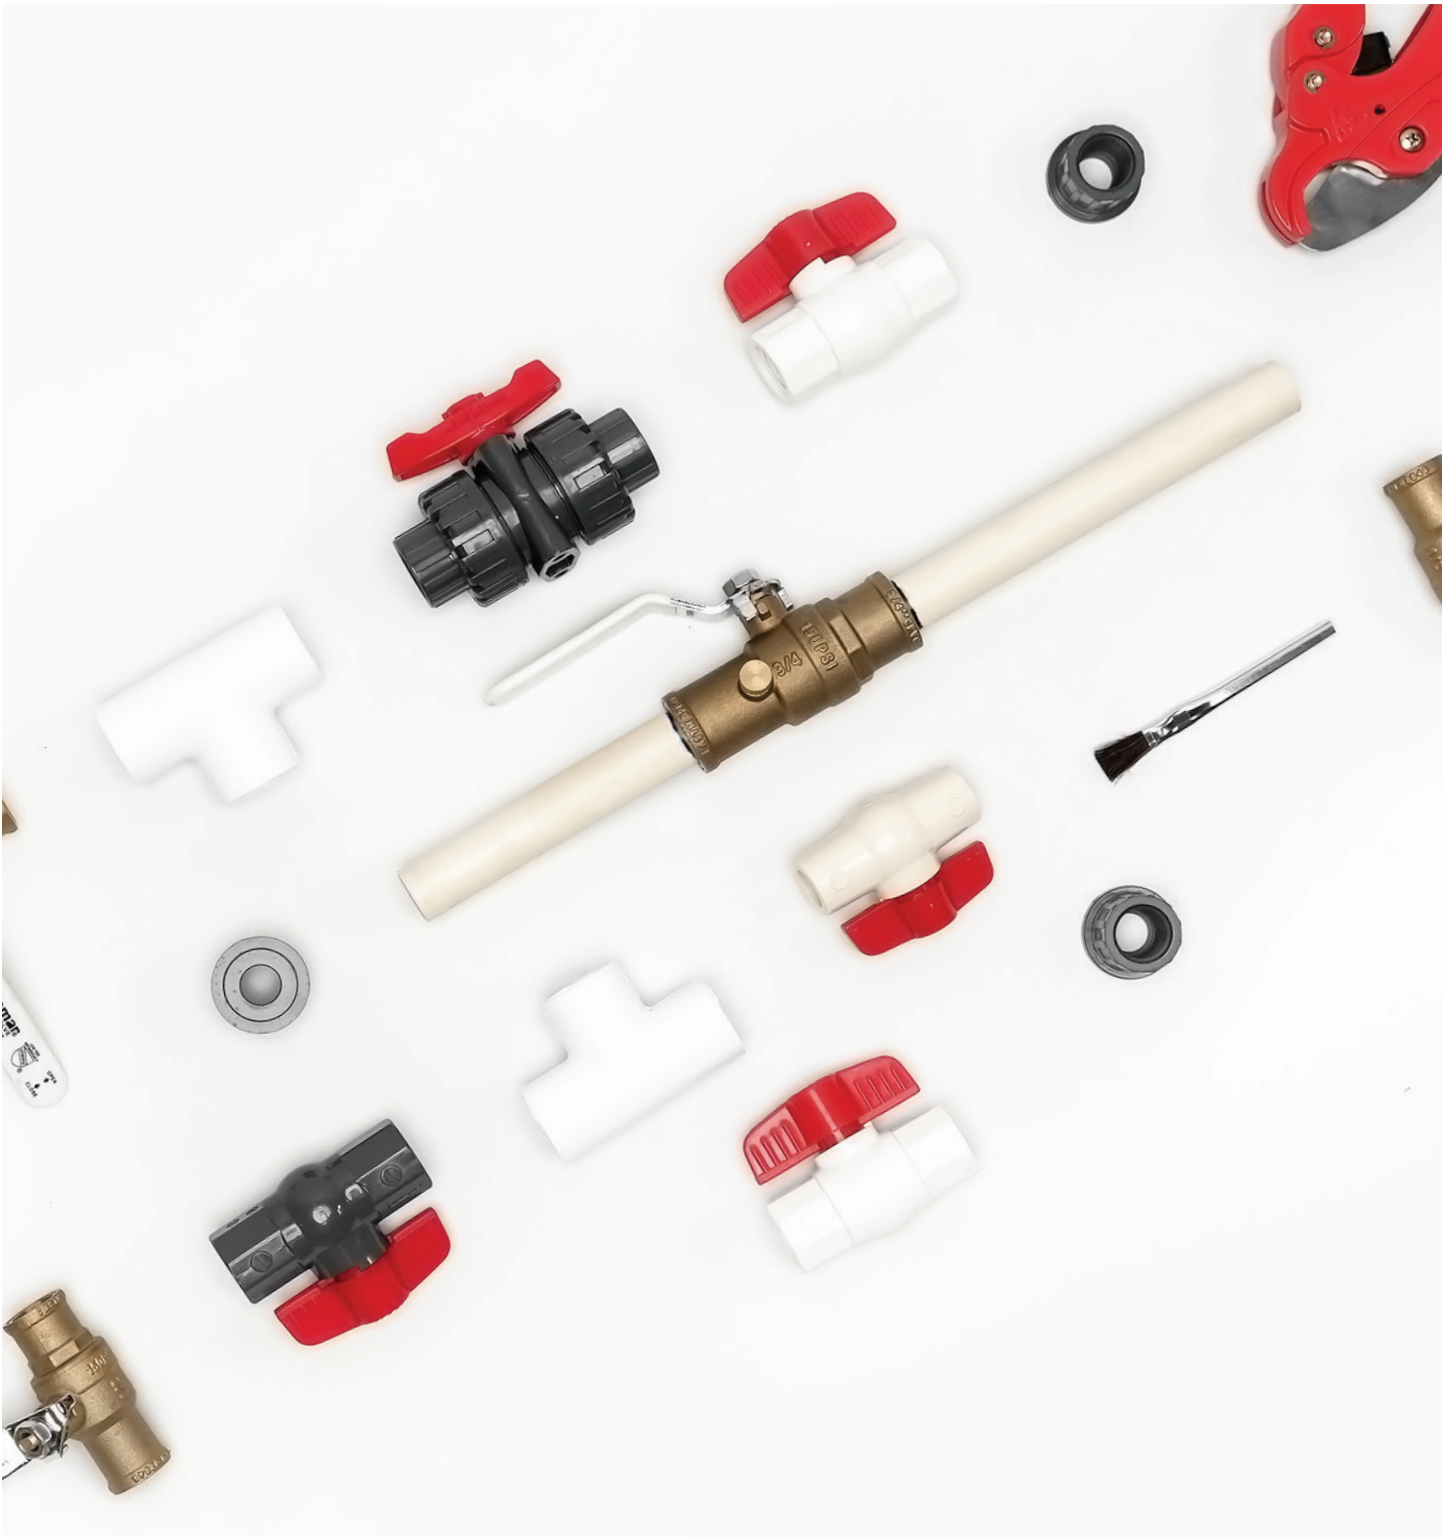

# CPVC/PVC VALVES



**S-155G**

CPVC, 2 Piece, Full Port, Solvent Connection, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-603G	1/2"	54	6	29
150-604G	3/4"	48	4	40
150-605G	1"	18	2	26
150-607G	1-1/2"	-	-	-
150-608G	2"	-	-	-

- Dezincification Resistant Brass Alloy
- Standard CTS
- For Hot/Cold Water Systems
- Quarter-Turn Operation
- Standard CPVC Installation
- CPVC End Connection Inserts



**S-165G**

CPVC, 2 Piece, Full Port, Solvent Connection with Drain, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
150-663G	1/2"	54	6	31
150-664G	3/4"	48	4	41
150-665G	1"	18	2	26

- Dezincification Resistant Brass Alloy
- Standard CTS
- For Hot/Cold Water Systems
- Drain Tap 1/8" Orifice
- Standard CPVC Installation
- CPVC End Connection Inserts





**S-605**

CPVC, Solvent Connection, Copper Tube Size, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-603	1/2"	100	10	13
210-604	3/4"	100	5	22
210-605	1"	100	8	39
210-606	1-1/4"	100	5	59
210-607	1-1/2"	48	4	59
210-608	2"	48	1	62

- Standard CTS
- Large Port
- For Hot/Cold Water Systems
- Quarter-Turn Operation
- Easy Installation
- Bone Color
- Wetted Surfaces Contain Less than .25% Lead Content



**T/S-703**

Tru-Union PVC, Threaded and Solvent Connections, Schedule 80, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-543	1/2"	48	48	21
210-544	3/4"	36	36	25
210-545	1"	24	24	24
210-546	1-1/4"	24	24	40
210-547	1-1/2"	24	24	59
210-548	2"	12	12	51
210-549	2-1/2"	12	6	75
210-550	3"	6	4	54
210-551	4"	1	1	25

- NPS Connections
- Easy Installation with Hand Tightened Union Nuts
- Easy Line Breakdowns Without Installing Additional Unions
- Full Port Design; Minimum Flow Restrictions
- Manufactured/Assembled Without Hydrocarbon Lubricants
- Mounting Pads for Electric or Pneumatic Actuation
- Wetted Surfaces Contain Less than .25% Lead Content



**T-701**

PVC, Threaded Connection, Schedule 80, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-203	1/2"	100	10	20
210-204	3/4"	100	10	32
210-205	1"	100	8	50
210-206	1-1/4"	100	5	66
210-207	1-1/2"	48	4	66
210-208	2"	24	8	40
210-209	2-1/2"	12	4	40
210-210	3"	12	6	56
210-211	4"	6	4	57

- NPS Connections
- 100% Tested
- Minimal Pressure Drop/Turbulence
- Corrosion Resistant PVC Material
- Wetted Surfaces Contain Less than .25% Lead Content





## S-701

PVC, Solvent Connection, Schedule 80, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-223	1/2"	100	10	20
210-224	3/4"	100	10	32
210-225	1"	100	8	50
210-226	1-1/4"	100	5	66
210-227	1-1/2"	48	4	66
210-228	2"	24	8	40
210-229	2-1/2"	12	4	40
210-230	3"	12	6	56
210-231	4"	6	4	57

- NPS Connections
- 100% Tested
- Minimal Pressure Drop/Turbulence
- Corrosion Resistant PVC Material
- Wetted Surfaces Contain Less than .25% Lead Content



## T-702

PVC, Threaded Connection, Schedule 40, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-703	1/2"	100	10	20
210-704	3/4"	100	10	32
210-705	1"	80	10	40
210-706	1-1/4"	50	10	33
210-707	1-1/2"	24	6	33
210-708	2"	24	3	40

- NPS Connections
- 100% Tested
- Minimal Pressure Drop/Turbulence
- Wetted Surfaces Contain Less than .25% Lead Content



## S-702

PVC, Solvent Connection, Schedule 40, 150 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
210-723	1/2"	100	10	20
210-724	3/4"	100	10	32
210-725	1"	80	10	40
210-726	1-1/4"	50	10	33
210-727	1-1/2"	24	6	33
210-728	2"	24	3	40

- NPS Connections
- 100% Tested
- Minimal Pressure Drop/Turbulence
- Wetted Surfaces Contain Less than .25% Lead Content





# LOCKWINGS



**175-LWN**

Utility Gas Ball Valve, Full Port, FIP x FIP Connection, 175 PSIG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
240-003B	1/2"	40	10	47
240-003P	1/2"	40	10	48
240-004B	3/4"	40	10	51
240-004P	3/4"	40	10	50
240-004T	3/4"	40	10	51
240-005B	1"	24	6	50
240-005P	1"	24	6	49
240-005T	1"	24	6	50
240-006B	1-1/4"	16	4	47
240-006P	1-1/4"	16	4	47
240-006T	1-1/4"	16	4	47
240-007B	1-1/2"	8	2	32
240-007P	1-1/2"	8	2	32
240-007T	1-1/2"	12	3	48
240-008B	2"	8	4	49
240-008P	2"	8	4	49
240-008T	2"	8	4	49

(B) BRASS, (P) PAINTED, (T) T.E.A. COATED

- Tamper Resistant Lockwing Cap
- 2 FKM O-Rings
- Full Port Design to Accommodate Industry Leading Stop Changers
- Lockwing Accommodates Standard Barrel Locks
- Maintenance Free Design
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty



BRASS



PAINTED



T.E.A. COATED



**175-LWIN**

Utility Gas Ball Valve, Full Port, FIP x Dielectric Union Connection, Insulated Tailpiece, 175 PSIG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
241-004D	3/4"	30	5	59
241-004P	3/4"	32	5	69
241-004T	3/4"	20	5	39
241-005D	1"	12	2	43
241-005P	1"	12	2	50
241-005T	1"	12	2	43
241-006D	1-1/4"	8	2	43
241-006P	1-1/4"	12	2	46
241-006T	1-1/4"	8	2	52
241-008T	2"	4	2	41

(D) BRASS, (P) PAINTED, (T) T.E.A. COATED

- Tamper Resistant Lockwing Cap
- 2 FKM O-Rings
- Full Port Design to Accommodate Industry Leading Stop Changers
- Lockwing Accommodates Standard Barrel Locks
- Maintenance Free Design
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty



BRASS



PAINTED



T.E.A. COATED



**125-LWN**

Utility Gas Ball Valve, Full Port, Threaded Connection, 125 PSIG

PART NO.	SIZE	CASE	CARTON	WEIGHT
FIP X FIP				
242-005B	1"	24	6	40
MIP X FIP				
246-005B	1"	24	6	39
246-006B	1-1/4"	24	6	39

(b) BRASS


- Tamper Resistant Lockwing Cap
- 2 FKM O-Rings
- Full Port Design to Accommodate Industry Leading Stop Changers
- Lockwing Accommodates Standard Barrel Locks
- Maintenance Free Design
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty



FIP X FIP



MIP X FIP

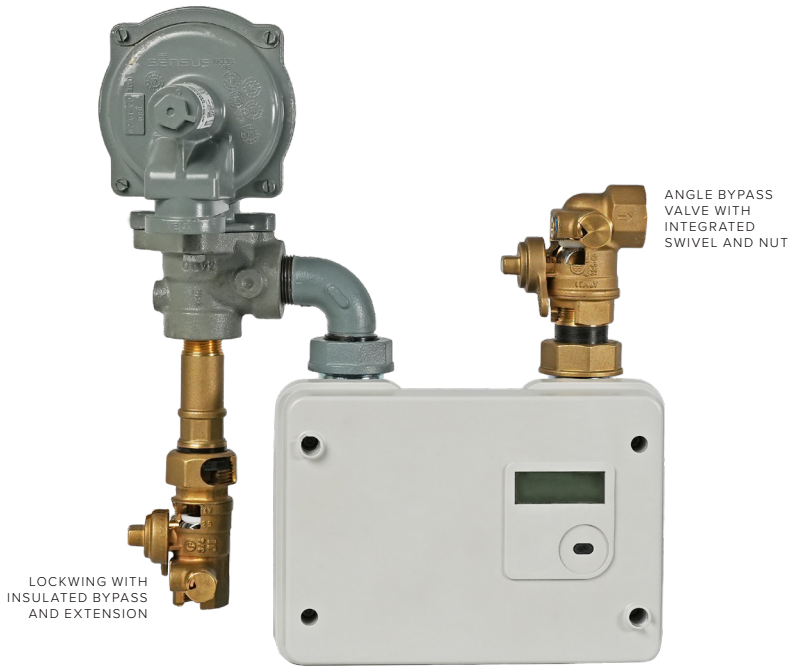

LOCKWING WITH INSULATED BYPASS AND EXTENSION

ANGLE BYPASS VALVE WITH INTEGRATED SWIVEL AND NUT

**BYPASS BENEFITS**

- Streamline Regulator & Meter and Nut Repairs or Replacements
- Significantly Lower Leak Points
- Save on Labor Due to Reduced Connections
- Eliminate Leaks to Atmosphere with our Maintenance Free Lockwing (Ball Valve)







# DIELECTRIC UNIONS




## Dielectric Union

Solder x Galvanized FIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-103G	1/2"	80	10	30
701-104G	3/4"	80	10	37
701-105G	1"	80	10	41
701-106G	1-1/4"	72	6	62
701-107G	1-1/2"	36	6	61
701-108G	2"	20	5	52

- Dezincification Resistant Brass Alloy
- Prevents Accelerated Corrosion
- Buna Seats: -20°F to 180°F
- Wetted Surfaces Contain Less than .25% Lead Content

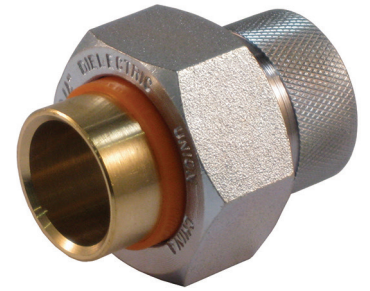

LEAD FREE




## Dielectric Union

Solder x Galvanized MIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-304G	3/4"	96	12	61
701-306G	1"	60	10	62

- Dezincification Resistant Brass Alloy
- Prevents Accelerated Corrosion
- Buna Seats: -20°F to 180°F
- Wetted Surfaces Contain Less than .25% Lead Content

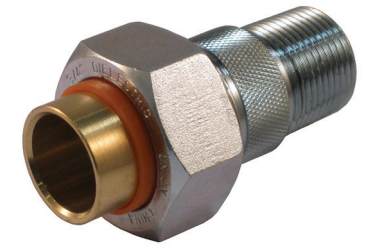

LEAD FREE




## Dielectric Union

FIP x Galvanized FIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-503G	1/2"	100	10	52
701-504G	3/4"	60	10	50
701-505G	1"	40	5	53

- Dezincification Resistant Brass Alloy
- Prevents Accelerated Corrosion
- Buna Seats: -20°F to 180°F
- Wetted Surfaces Contain Less than .25% Lead Content

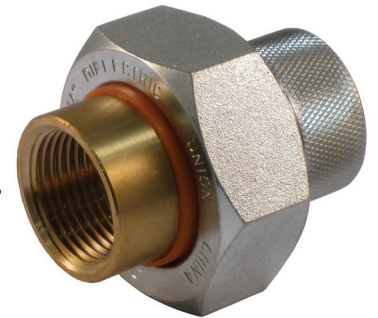

LEAD FREE

# LEAD FREE PRESS DIELECTRIC UNION



EPDM O-RING



LEAD FREE BRASS PRESS CONNECTION



GALVANIZED CONNECTION



## Dielectric Union

Press x Galvanized FIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-703G	1/2"	100	10	45
701-704G	3/4"	80	10	52
701-705G	1"	60	6	57
701-706G	1-1/4"	40	5	57
701-707G	1-1/2"	24	4	47
701-708G	2"	16	2	48

- Dezincification Resistant Brass Alloy
- Prevents Accelerated Corrosion
- EPDM Gasket: -20°F to 180°F
- Wetted Surfaces Contain Less than .25% Lead Content




## Dielectric Union

Press x Galvanized MIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-803G	1/2"	100	10	56
701-804G	3/4"	80	10	64

- Dezincification Resistant Brass Alloy
- Prevents Accelerated Corrosion
- EPDM Gasket: -20°F to 180°F
- Wetted Surfaces Contain Less than .25% Lead Content

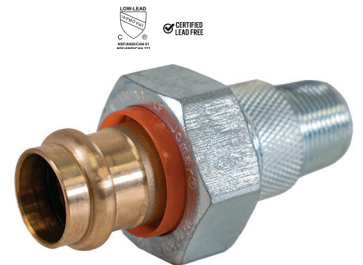




## Dielectric Union

Solder x Galvanized FIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-103	1/2"	80	12	30
701-104	3/4"	80	10	37
701-105	1"	80	12	62
701-106	1-1/4"	40	10	48
701-107	1-1/2"	36	6	60
701-108	2"	20	5	52

- Prevents Accelerated Corrosion
- Buna Seats: -20°F to 180°F

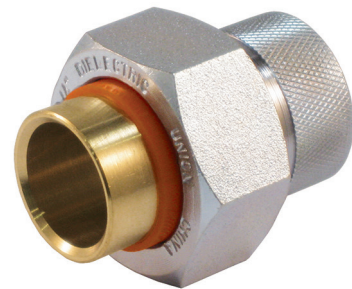


## Dielectric Union

FIP x Galvanized FIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-413	1/2"	80	10	41
701-414	3/4"	60	10	49
701-415	1"	40	5	54
704-416	1-1/4"	40	5	57
701-417	1-1/2"	20	5	61
701-418	2"	12	2	43

- Prevents Accelerated Corrosion
- Buna Seats: -20°F to 180°F

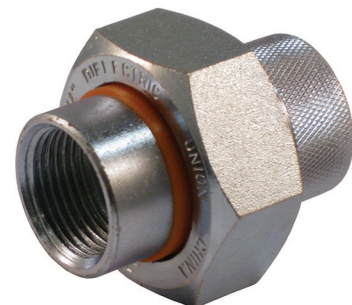

## Dielectric Union

Black Iron, FIP x FIP Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
701-403	1/2"	80	10	42
701-404	3/4"	60	10	51
701-405	1"	40	5	53
701-406	1-1/4"	30	5	51
701-407	1-1/2"	20	5	61
701-408	2"	10	2	36

- Prevents Accelerated Corrosion
- For Use on Black Pipe
- Suitable for use in gas or water applications
- Buna Seats: -20°F to 180°F




## Liquid Propane Dielectric Union

MIP x Flare Connection, 250 PSI

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
703-102	1/2" MIP X 3/8" FLARE	100	10	57
703-103	1/2" MIP X 1/2" FLARE	100	10	59
703-104	1/2" MIP X 5/8" FLARE	100	10	64
704-102	3/4" MIP X 3/8" FLARE	60	6	47
704-103	3/4" MIP X 1/2" FLARE	60	6	49
704-104	3/4" MIP X 5/8" FLARE	60	6	51

- Meets NFPA 58 Dielectric Union Requirement
- For Use in Propane Applications
- Prevents Accelerated Corrosion
- HNBR Seal: -40°F to 180°F





**LOW PRESSURE**



**T-621G**

Threaded x MIP Connection, 125 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
201-003G	1/2"	100	10	50
201-004G	3/4"	100	10	56

- Dezincification Resistant Brass Alloy
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**T-622G**

Threaded x FIP Connection, 125 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
201-103G	1/2"	100	10	46
201-104G	3/4"	100	10	51

- Dezincification Resistant Brass Alloy
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**T-624G**

Crimp Pex Connection, 125 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
201-123G	1/2"	96	6	53

- Dezincification Resistant Brass Alloy
- IAPMO Certified - NSF 61 & ANSI 372
- Wetted Surfaces Contain Less than .25% Lead Content





**T-621**

Threaded x MIP Connection, 125 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
201-003	1/2"	100	10	53
201-004	3/4"	100	10	57

- Residential and Commercial Applications
- 3/4" Hose Thread Outlet





**T-641G**

Threaded x FIP Connection, 125 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
202-003G	1/2"	100	10	58
202-004G	3/4"	100	10	64

- Dezincification Resistant Brass Alloy
- 3/4" Hose Thread Outlet
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**S-641G**

Solder x FIP Connection, 125 WOG

PART NUMBER	SIZE	CASE	CARTON	WEIGHT
202-103G	1/2"	100	10	59
202-104G	3/4"	100	10	65

- Dezincification Resistant Brass Alloy
- 3/4" Hose Thread Outlet
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content







**T-632G**

Lead Free Brass or Nickel-Plated, Threaded Connection, Quarter-Turn, 200 WOG

PART NO.	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
201-215G	1/2"	100	10	43
201-216G	3/4"	100	10	43
T-HANDLE (NICKEL-PLATED FINISH)				
201-205G	1/2"	100	10	43
201-206G	3/4"	100	10	47

**Lever Handle**

- Dezincification Resistant Brass Alloy
- Long Life Positive Shut-Off
- 1/2" has Combination 1/2" MIP and 1/2" Solder Inlet
- IAPMO Certified NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**T-Handle**

- Nickel-Plated Finish
- Aluminum T-Handle
- Long Life Positive Shut-Off
- 1/2" has Combination 1/2" MIP and 1/2" Solder Inlet
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**T-632NKG**

Lead Free Brass and Nickel-Plated, Threaded Connection, Quarter-Turn, No Kink, 200 WOG

PART NO.	SIZE	CASE	CARTON	WEIGHT
LEVER HANDLE				
201-217G	1/2"	100	10	40
201-218G	3/4"	100	10	40
T-HANDLE (NICKEL-PLATED FINISH)				
201-207G	1/2"	100	10	40
201-208G	3/4"	100	10	45

**Lever Handle**

- Dezincification Resistant Brass Alloy
- Long Life Positive Shut-Off
- 1/2" has Combination 1/2" MIP and 1/2" Solder Inlet
- IAPMO Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



**T-Handle**

- Nickel-Plated Finish
- Long Life Positive Shut-Off
- Aluminum T-Handle
- 1/2" has Combination 1/2" MIP and 1/2" Solder Inlet
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content





## T-653G

Threaded Connection



PART NUMBER	SIZE	CASE	CARTON	WEIGHT
203-204G	3/4"	240	20	51

- Dezincification Resistant Brass Alloy
- 3/4" Hose Connection
- Tamper-Resistant Breakaway Screw
- POM Internal Components
- Truesdail Certified NSF/ANSI/CAN 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content





# BASKET STRAINER



**Snap-N-Loc®**

SS-306, Sink Strainer, 300 Grade Stainless or Brushed Stainless Steel

PART NUMBER	CASE
300-006	24
300-008	24
300-017CLAM	36



**Twist-N-Loc®**

SS-304, Sink Strainer, Chrome Plated Brass or 300 Grade Brushed Stainless Steel

PART NUMBER	CASE
300-001	24
300-003	24
300-023CLAM	24



**Easy-Loc®**

SS-305, Sink Strainer, Chrome Plated Brass

PART NUMBER	CASE
300-004	24



**Mag-Na-Loc™**

SS-420, Sink Strainer, 300 Grade Stainless Steel

PART NUMBER	CASE
300-011	24





**Snap-N-Seal®**

SS-430, Sink Strainer, 400 Grade Stainless Steel

PART NUMBER	CASE
300-013	24



**Snap-Tite™**

SS-440, Sink Strainer, 300 Grade Stainless Steel

PART NUMBER	CASE
300-014	24



**Push-N-Seal II™**

BS-323-DBS, Sink Strainer, 400 Grade Brushed Stainless Steel

PART NUMBER	CASE
300-021CLAM	24



**Small Wonder™**

SS-308, Sink Strainer, Chrome Plated Brass or 300 Grade Brushed Stainless Steel

PART NUMBER	CASE
300-101	96





**Bar-ette™**

SS-310, Bar Sink Strainer, Chrome Plated Brass

PART NUMBER	CASE
300-102	96



**Accessories**

For Designer Series Basket Strainers

PART NUMBER	CASE	TYPE
301-001	24	BASKET FOR TWIST-N-LOC®
301-002	24	BASKET FOR SNAP-N-LOC®
302-106	24	BRASS TAILNUT



BASKET FOR TWIST-N-LOC®



BASKET FOR SNAP-N-LOC®



BRASS TAILNUT



**Disposer with Stopper**  
SS-400, 400 Grade Stainless Steel

PART NUMBER	CASE
305-400	48



**Economy Strainer**  
SS-401, Sink Strainer, 400 Grade Stainless Steel

PART NUMBER	CASE
305-401	48



**Basic Deep Cup Sink Strainer**  
SS-409, Sink Strainer, 400 Grade Stainless Steel

PART NUMBER	CASE
305-408	48









# THREAD SEALANT



## White Stuff

Slow-Drying, Soft-Set, PTFE Thread Sealant

PART NUMBER	SIZE	CASE	WEIGHT
400-001	2 OZ. TUBE	72	11
400-002	4 OZ. CAN	24	13
400-003	8 OZ. CAN	24	20
400-004	16 OZ. CAN	12	22
400-005	32 OZ. CAN	12	39

Jomar's White Stuff is a slow drying, soft setting, non-hardening PTFE pipe thread compound. It will not transfer taste or odor to the system being sealed. Excellent for food and water systems. It is lead free, anti-galling, noncorrosive, nontoxic and will not harden in can.



## Green Stuff

Slow-Drying, Soft-Set, General Purpose Thread Sealant

PART NUMBER	SIZE	CASE	WEIGHT
400-101	2 OZ. TUBE	72	11
400-102	4 OZ. CAN	24	13
400-103	8 OZ. CAN	24	20
400-104	16 OZ. CAN	12	22
400-105	32 OZ. CAN	12	39

Jomar's Green Stuff is a slow drying, soft setting, non-hardening pipe thread compound. It will not transfer taste or odor to the system being sealed. Excellent for food and water systems. It is lead free, anti-galling, noncorrosive, nontoxic and will not harden in can.



## Heavyweight

Slow-Drying, Soft-Set, Extra PTFE Thread Sealant

PART NUMBER	SIZE	CASE	WEIGHT
400-202	4 OZ. CAN	24	11
400-203	8 OZ. CAN	24	13
400-204	16 OZ. CAN	12	22

Jomar's Heavyweight is a slow drying, soft setting, non-hardening industrial PTFE pipe thread compound. It will not transfer taste or odor to the system being sealed. Excellent for food and water systems. It is lead free, anti-galling, noncorrosive, nontoxic and will not harden in can.





### WOG Plus

Fast-Drying, Hard-Set, Thread and Gasket Sealant

PART NUMBER	SIZE	CASE	WEIGHT
400-302	4 OZ. CAN	24	12
400-303	4 OZ. CAN	24	21
400-304	8 OZ. CAN	12	19

Jomar's WOG Plus is a fast drying, hard setting, semi-paste, thread and gasket sealer. It remains flexible, so vibrations will not loosen connection. WOG Plus seals tightly but allows for disassembly without damage to parts. It is lead free, halogen free, noncorrosive and nontoxic.



### Copper Anti-Seize

High Temperature Anti-Seize Lubricant and Thread Sealant

PART NUMBER	SIZE	CASE	WEIGHT
400-403	8 OZ. TUBE	24	19
400-404	16 OZ. CAN	12	15

Jomar's Copper Anti-Seize is a copper based anti-seize lubricant and thread sealant for high temperatures. It produces a permanent leakproof metallic seal under pressure, yet prevents seizing, galling, freezing, and tearing, even under extreme conditions. It is lead free, noncorrosive, nontoxic, and will not harden in can.



### Nickel Anti-Seize

High Temperature Nickel Anti-Seize Lubricant and Thread Sealant

PART NUMBER	SIZE	CASE	WEIGHT
400-503	8 OZ. CAN	12	19
400-504	16 OZ. CAN	12	15

Jomar's Nickel Anti-Seize is a non-seizing, nickel based, lubricant and thread sealant. It may be used to prevent seizing, corrosion and galling where extreme temperature conditions exist. It contains a high percentage of microfine nickel flakes and is fortified with high quality rust and corrosion inhibitors. It is lead free, nontoxic, and will not harden in can.







# ACCESSORIES



### Lever Handle

Geomet Plated Steel, Fits T-100, S-100, JP-100 Series

PART NUMBER	SIZE
899-701	1/4", 3/8", 1/2"
899-704	3/4"
899-705	1", 1-1/4"
899-708	1-1/2", 2"
899-710	2-1/2", 3"
899-711	4"



### Lever Handle

Chrome Plated, Fits JF-100T/S, T/S-110, T-100HF, S-100HS, T/S-412G, T/S-422G, T-423G

PART NUMBER	SIZE
100-103RH	1/4" - 1/2"
100-105RH	3/4" - 1"
100-108RH	1-1/4" - 2"
100-109RH	2-1/2"
100-110RH	3"
100-111RH	4"



### Lever Handle and Nut

Stainless Steel, Fits T-100, S-100, JP-100 Series

PART NUMBER	SIZE
220-300	1/4", 3/8", 1/2"
220-301	3/4"
220-302	1", 1-1/4"
220-303	1-1/2", 2"
220-305	2-1/2", 3"
220-306	4"



### Lever Handle and Nut

Stainless Steel, Fits JF-100T/S

PART NUMBER	SIZE
100-103SH	1/4" - 1/2"
100-105SH	3/4" - 1"
100-108SH	1-1/4" - 2"





### Locking Handle

Latch Lock, Stainless Steel, for Lead Free Valves, T/S-100CG, JP-100G, JP-100SSG, T-100UEG

PART NUMBER	SIZE
220-994G	1/4", 3/8", 1/2"
220-995G	3/4"
220-996G	1", 1-1/4"
220-997G	1-1/2", 2"



### Locking Handle

Latch Lock, Chrome Plated, Fits JF-100G Series, T/S-412G, T/S-422G, T-423G

PART NUMBER	SIZE
100-103GLL	1/4" - 1/2"
100-105GLL	3/4" - 1"
100-108GLL	1-1/4" - 2"
100-109GLL	2-1/2"
100-110GLL	3"
100-111GLL	4"



### Locking Handle

Latch Lock, Chrome Plated, Fits JF-100T/S, T/S-110, T-100HF, S-100HS, C-402

PART NUMBER	SIZE
100-103LL	1/4" - 1/2"
100-105LL	3/4" - 1"
100-108LL	1-1/4" - 2"
100-109LL	2-1/2"
100-110LL	3"
100-111LL	4"



### Locking Handle

Latch Lock, Stainless Steel, Fits T-100NE

PART NUMBER	SIZE
220-994	1/4", 3/8", 1/2"
220-995	3/4"
220-996	1", 1-1/4"
220-997	1-1/2", 2"





### Locking Handle

Latch Lock, Stainless Steel, Fits T-100FMN, T-100SSE, JP-100

PART NUMBER	SIZE
220-984	1/4", 3/8", 1/2"
220-985	3/4"
220-986	1", 1-1/4"
220-987	1-1/2", 2"



### Locking Handle

Latch Lock, Stainless Steel, Fits T-SS-2002N-DUE

PART NUMBER	SIZE
100-992LH	3/8"
100-993LH	1/2"
100-994LH	3/4"
100-995LH	1"
100-996LH	1-1/4"
100-997LH	1-1/2"
100-998LH	2"



### Locking Handle

Lift-N-Lock, Spring-Loaded Tamper-Proof Locking Device

PART NUMBER	SIZE
OPEN & CLOSED	
210-994	1/4", 3/8", 1/2"
210-995	3/4"
210-996	1", 1-1/4"
210-997	1-1/2", 2"
210-998	2-1/2", 3"
CLOSED ONLY	
210-994C	1/4", 3/8", 1/2"
210-995C	3/4"
210-996C	1", 1-1/4"
210-997C	1-1/2", 2"
210-998C	2-1/2", 3"
210-999C	4"



### T-Handle

Red Aluminum, Fits T-100, S-100, JP-100 Series

PART NUMBER	SIZE
220-204	1/4", 3/8", 1/2"
220-205	3/4"
220-206	1", 1-1/4"







### T-Handle

Red Aluminum, Fits T/S-412G, T/S-422G, T-423G, JF-100T/S, T/S-110, T-100HF, S-100HS

PART NUMBER	SIZE
899-123	1/4", 3/8", 1/2"
899-125	3/4", 1"



### Long Neck T-Handle

Fits T-100, S-100, JP-100 Series


PART NUMBER	SIZE
220-223	1/4", 3/8", 1/2"
220-224	3/4"
220-225	1", 1-1/4"



### Wingtip Handle

Fits JF-100 Series, T/S-412G, T/S-422G, JP-150G, T/S-150G

PART NUMBER	SIZE
899-123GWH	1/4", 3/8", 1/2"
899-125GWH	3/4", 1"
899-128GWH	1-1/4", 1-1/2", 2"

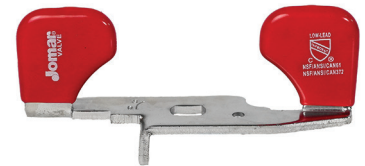

### Oval Handle

Fits T-100, S-1000, JP-100 Series

PART NUMBER	SIZE
220-514	1/2"
220-515	3/4"
220-516	1", 1-1/4"
220-517	1-1/2", 2"





### Oval Handle

Fits JF-100T/S, T/S-110, T-100HF, S-100HS

PART NUMBER	SIZE
100-103OH	1/4" - 1/2"
100-105OH	3/4" - 1"
100-108OH	1-1/4" - 2"



### Extended Handle

Fits T-84-M

PART NUMBER	SIZE
220-400	1/8"



### Thermal-Block™

Thermal Insulated Handle with Memory Stop for Brass Ball Valves,  
Fits T/S-100CG, T/S-100CSSG, JP-100G, JP-100SSG, T-100NE

PART NUMBER	SIZE
220-323	1/2"
220-324	3/4"
220-326	1", 1-1/4"
220-328	1-1/2", 2"

- UL 2043 Certified Handle



### Thermal-Block™

Thermal Insulated Handle with Memory Stop for Bronze Ball Valves,  
Fits T/S-200CSSG, T/S-200CSS

PART NUMBER	SIZE
220-423	1/2"
220-424	3/4", 1"
220-426	1-1/4"
220-428	1-1/2", 2"

- UL 2043 Certified Handle





### Slo-Ball Handle

270° Gear Operator Handle, Fits T-100, S-100 or JP-100 Series


PART NUMBER	SIZE
220-014	1/4", 3/8", 1/2"
220-015	3/4"
220-016	1", 1-1/4"
220-017	1-1/2", 2"



### Memory Stop

Fits T-100, S-100, JP-100 Series

PART NUMBER	SIZE
220-103	1/4", 3/8", 1/2"
220-104	3/4"
220-105	1", 1-1/4"
220-106	1-1/2", 2"



### Square Head Top

1-1/16" Diameter, Fits T-100, S-100, JP-100 Series

PART NUMBER	SIZE
889-113	1/2"
889-114	3/4"
889-115	1", 1-1/4"
899-117	1-1/2", 2"





**Stem Extension**

2", T.E.A. Coated, Fits T-100, S-100, JP-100 Series

PART NUMBER	SIZE
230-004	1/4", 3/8", 1/2"
230-005	3/4"
230-006	1", 1-1/4"
230-007	1-1/2", 2"
230-008	2-1/2", 3"



**Stem Extension**

2", Fits JP-150G, T/S-412G, T/S-422G, JF-100T/S, T/S-110, T-100HF, S-100HS

PART NUMBER	SIZE
100-103EH	1/4"-1/2"
100-105EH	3/4"-1"
100-108EH	1-1/4"-2"





## Filter Ball® Replacement Filters

Stainless Steel, Fits T-100FBG

PART NUMBER	SIZE	CASE	WEIGHT
MESH 20			
221-014	1/2" AND 3/4" HEAVY PATTERN*	250	4
221-015	1"	200	4
221-016	1-1/4"	150	5
221-017	1-1/2"	80	5
221-018	2***	40	5
MESH 40			
221-114	1/2" AND 3/4" HEAVY PATTERN*	250	4
221-115	1"	200	4
221-116	1-1/4"	150	4
221-117	1-1/2"	80	6
221-118	2***	40	5
MESH 60			
221-204	1/2" AND 3/4" HEAVY PATTERN*	250	5
221-205	1"	200	6
221-206	1-1/4"	150	7
221-207	1-1/2"	80	6
221-208	2**	40	6
MESH 80			
221-214	1/2" AND 3/4" HEAVY PATTERN*	250	5
221-215	1"	200	6
221-216	1-1/4"	150	7
221-217	1-1/2"	80	6
221-218	2***	40	6
MESH 100			
221-224	1/2" AND 3/4" HEAVY PATTERN*	250	5
221-225	1"	200	6
221-226	1-1/4"	150	3
221-227	1-1/2"	80	6
221-228	2**	40	6

\*FOR 1/2" AND 3/4" REPLACEMENT FILTERS OF VALVES PURCHASED PRIOR TO 2015, OR 2" REPLACEMENT FILTERS OF VALVES PURCHASED PRIOR TO JUNE 2020, CONTACT CSR@JOMAR.COM.



# PART NUMBER INDEX

PART NUMBER	PAGE
100-080RVSSG	26
100-100RVSSG	26
100-101	44
100-101-LH	45
100-101SSG	22
100-101SSG-LH	22
100-101-TH	44
100-102	44
100-102-LH	45
100-102SSG	22
100-102SSG-LH	22
100-102-TH	44
100-103	44
100-103EH	140
100-103GLL	135
100-103JFPG	34
100-103-LH	45
100-103LL	135
100-103OH	138
100-103RH	134
100-103SH	134
100-103SSG	22
100-103SSG-LH	22
100-103-TH	44
100-104	44
100-104JFPG	34
100-104-LH	45
100-104SSG	22
100-104SSG-LH	22
100-104-TH	44
100-105	44
100-105EH	140
100-105GLL	135
100-105JFPG	34
100-105-LH	45
100-105LL	135
100-105OH	138
100-105RH	134
100-105SH	134
100-105SSG	22
100-105SSG-LH	22
100-105-TH	44
100-106	44
100-106-20	46
100-106-LH	45
100-106SSG	22
100-106SSG-LH	22
100-107	44
100-107-24	46

PART NUMBER	PAGE
100-107-LH	45
100-107SSG	22
100-107SSG-LH	22
100-108	44
100-108EH	140
100-108GLL	135
100-108-LH	45
100-108LL	135
100-108OH	138
100-108RH	134
100-108SH	134
100-108SSG	22
100-108SSG-LH	22
100-109	44
100-109GLL	135
100-109-LH	45
100-109LL	135
100-109RH	134
100-109SSG	22
100-109SSG-LH	22
100-110	44
100-110GLL	135
100-110-LH	45
100-110LL	135
100-110RH	134
100-110SSG	22
100-110SSG-LH	22
100-111	44
100-111GLL	135
100-111-LH	45
100-111LL	135
100-111RH	134
100-111SSG	22
100-111SSG-LH	22
100-113	44
100-113-LH	45
100-113SSG	22
100-113SSG-LH	23
100-114	44
100-114-LH	45
100-114SSG	22
100-114SSG-LH	23
100-115	44
100-115-LH	45
100-115SSG	22
100-115SSG-LH	23
100-116	44
100-116-LH	45
100-116SSG	22

PART NUMBER	PAGE
100-116SSG-LH	23
100-117	44
100-117-LH	45
100-117SSG	22
100-117SSG-LH	23
100-118	44
100-118-LH	45
100-118SSG	22
100-118SSG-LH	23
100-119	44
100-119-LH	45
100-119SSG	22
100-119SSG-LH	23
100-120	44
100-120-LH	45
100-120SSG	22
100-120SSG-LH	23
100-121	44
100-121-LH	45
100-121SSG	22
100-121SSG-LH	23
100-125RVSSG	26
100-131	45
100-131G	33
100-131-TH	45
100-132	45
100-132G	33
100-132-TH	45
100-133	45
100-133G	33
100-133-TH	45
100-134	45
100-134G	33
100-134-TH	45
100-135	45
100-135G	33
100-135-TH	45
100-203	41
100-203G	16
100-203G-IH	17
100-203G-LH	17
100-203SSG	17
100-203SSG-IH	19
100-203SSG-LH	18
100-204	41
100-204G	16
100-204G-IH	17
100-204G-LH	17
100-204SSG	18

PART NUMBER	PAGE
100-204SSG-IH	19
100-204SSG-LH	18
100-205	41
100-205G	16
100-205G-IH	17
100-205G-LH	17
100-205SSG	18
100-205SSG-IH	19
100-205SSG-LH	18
100-206	41
100-206G	16
100-206G-IH	17
100-206G-LH	17
100-206SSG	18
100-206SSG-IH	19
100-206SSG-LH	18
100-207	41
100-207G	16
100-207G-IH	17
100-207G-LH	17
100-207SSG	18
100-207SSG-IH	19
100-207SSG-LH	18
100-208	41
100-208G	16
100-208G-IH	17
100-208G-LH	17
100-208SSG	18
100-208SSG-IH	19
100-208SSG-LH	18
100-209XLC	42
100-209XLCG	17
100-209XLCSSG	18
100-210XLC	42
100-210XLCG	17
100-210XLCSSG	18
100-211XLC	42
100-211XLCG	17
100-211XLCSSG	18
100-295	42
100-296G	33
100-297	42
100-298	42
100-299	42
100-300	42
100-396G	33
100-397	43
100-397G	33
100-397G-TH	33

# PART NUMBER INDEX

PART NUMBER	PAGE
100-397-TH	43
100-398	43
100-398G	33
100-398G-TH	33
100-398-TH	43
100-399	43
100-399G	33
100-399G-TH	33
100-399-TH	43
100-400	43
100-400G	33
100-400G-TH	33
100-400-TH	43
100-403G	12
100-403G-IH	13
100-403G-LH	12
100-403SSG	14
100-403SSG-IH	15
100-403SSG-LH	14
100-404G	12
100-404G-IH	13
100-404G-LH	12
100-404SSG	14
100-404SSG-IH	15
100-404SSG-LH	14
100-405G	12
100-405G-IH	13
100-405G-LH	12
100-405SSG	14
100-405SSG-IH	15
100-405SSG-LH	14
100-406G	12
100-406G-IH	13
100-406G-LH	12
100-406SSG	14
100-406SSG-IH	15
100-406SSG-LH	14
100-407G	12
100-407G-IH	13
100-407G-LH	12
100-407SSG	14
100-407SSG-IH	15
100-407SSG-LH	14
100-408G	12
100-408G-IH	13
100-408G-LH	12
100-408SSG	14
100-408SSG-IH	15
100-408SSG-LH	14

PART NUMBER	PAGE
100-409G	12
100-410G	12
100-411G	12
100-413G	12
100-413G-IH	13
100-413G-LH	13
100-413SSG	14
100-413SSG-IH	15
100-413SSG-LH	15
100-414G	12
100-414G-IH	13
100-414G-LH	13
100-414SSG	14
100-414SSG-IH	15
100-414SSG-LH	15
100-415G	12
100-415G-IH	13
100-415G-LH	13
100-415SSG	14
100-415SSG-IH	15
100-415SSG-LH	15
100-416G	12
100-416G-IH	13
100-416G-LH	13
100-416SSG	14
100-416SSG-IH	15
100-416SSG-LH	15
100-417G	12
100-417G-IH	13
100-417G-LH	13
100-417SSG	14
100-417SSG-IH	15
100-417SSG-LH	15
100-418G	12
100-418G-IH	13
100-418G-LH	13
100-418SSG	14
100-418SSG-IH	15
100-418SSG-LH	15
100-419G	12
100-420G	12
100-421G	12
100-430	43
100-431	43
100-432	43
100-433	43
100-440	43
100-441	43
100-442	43

PART NUMBER	PAGE
100-443	43
100-460	43
100-461	43
100-462	43
100-463	43
100-501	40
100-502	40
100-503	40
100-504	40
100-505	40
100-506	40
100-507	40
100-508	40
100-509	40
100-510	40
100-533	40
100-534	40
100-535	40
100-536	40
100-537	40
100-538	40
100-601	40
100-602	40
100-603	40
100-604	40
100-605	40
100-633G	25
100-634G	25
100-635G	25
100-643G	25
100-644G	25
100-645G	25
100-653G	34
100-654G	34
100-663G	34
100-664G	34
100-673G	35
100-674G	35
100-701	38
100-701-LH	39
100-701-OH	39
100-702	38
100-702-LH	39
100-702-OH	39
100-703	38
100-703-IH	39
100-703-LH	39
100-703-OH	39
100-704	38

PART NUMBER	PAGE
100-704-IH	39
100-704-LH	39
100-704-OH	39
100-704RAT	38
100-705	38
100-705-IH	39
100-705-LH	39
100-705-OH	39
100-706	38
100-706-IH	39
100-706-LH	39
100-706-OH	39
100-707	38
100-707-IH	39
100-707-LH	39
100-707-OH	39
100-708	38
100-708-IH	39
100-708-LH	39
100-708-OH	39
100-709	38
100-710	38
100-711	38
100-753G	19
100-754G	19
100-773G	20
100-774G	20
100-803	39
100-804	39
100-805	39
100-806	39
100-807	39
100-808	39
100-809	39
100-810	39
100-833G	20
100-834G	20
100-835G	20
100-836G	20
100-837G	20
100-838G	20
100-903	56
100-904	56
100-905	56
100-906	56
100-907	56
100-908	56
100-931	55
100-931-DH	56

# PART NUMBER INDEX

PART NUMBER	PAGE
100-932	55
100-932-DH	56
100-933	55
100-933-DH	56
100-934	55
100-934-DH	56
100-935	55
100-935-DH	56
100-936	55
100-936-DH	56
100-937	55
100-937-DH	56
100-938	55
100-938-DH	56
100-941	55
100-942	55
100-943	55
100-944	55
100-945	55
100-946	55
100-947	55
100-948	55
100-949	55
100-950	55
100-951	51
100-951	55
100-952	51
100-953	51
100-954	51
100-955	51
100-956	51
100-957	51
100-958	51
100-961	55
100-962	55
100-963	55
100-964	55
100-965	55
100-966	55
100-967	55
100-968	55
100-971	51
100-972	51
100-973	51
100-974	51
100-975	51
100-976	51
100-977	51
100-978	51

PART NUMBER	PAGE
100-983	59
100-984	59
100-985	59
100-986	59
100-987	59
100-988	59
100-992	53
100-992LH	136
100-993	53
100-993LH	136
100-994	53
100-994LH	136
100-995	53
100-995LH	136
100-996	53
100-996LH	136
100-997	53
100-997LH	136
100-998	53
100-998LH	136
101-080RVSSG	27
101-100RVSSG	27
101-125RVSSG	27
101-401	48
101-402	48
101-403	48
101-403DU	48
101-404	48
101-404BRT*	48
101-404DU	48
101-411	48
101-412	48
101-413	48
101-414	48
101-502	48
101-503	48
101-504	48
101-512	48
101-513	48
101-513DU	48
101-601	48
101-602	48
101-603	48
101-604	48
101-612	48
101-613	48
101-614	48
101-702	48
101-703	48

PART NUMBER	PAGE
101-703DU	48
101-704DU	48
101-803DU	48
101-804DU	48
101-931	56
101-933	56
101-934	56
101-935	56
101-983	59
101-984	59
101-985	59
101-986	59
101-987	59
101-988	59
101-992	53
101-993	53
101-994	53
101-995	53
101-996	53
101-997	53
101-998	53
102-301	49
102-302	49
102-303	49
102-303DU	49
102-304	49
102-304DU	49
102-313DU	49
102-314DU	49
102-402	49
102-403	49
102-403DU	49
102-404	49
102-405	49
102-413DU	49
102-503	49
102-504	49
102-505	49
102-513	49
102-514	49
102-603	50
102-604	50
102-605	50
102-612	50
102-613	50
102-614	50
102-623	50
102-624	50
102-625	50

PART NUMBER	PAGE
102-633	50
102-653G	25
102-654G	25
102-655G	25
103-080RVSSG	27
103-100RVSSG	27
103-125RVSSG	27
103-301	86
103-302	86
103-303	86
103-303G	85
103-304	86
103-304G	85
103-305	86
103-305G	85
103-306	86
103-306G	85
103-307	86
103-307G	85
103-308	86
103-308G	85
103-309	86
103-310	86
103-311	86
103-353G	84
103-354G	84
103-355G	84
103-356G	84
103-357G	84
103-358G	84
103-403	86
103-403G	85
103-404	86
103-404G	85
103-405	86
103-405G	85
103-406	86
103-406G	85
103-407	86
103-407G	85
103-408	86
103-408G	85
103-409	86
103-410	86
103-453G	84
103-454G	84
103-455G	84
103-456G	84
103-457G	84



PART NUMBER	PAGE
103-458G	84
103-503	87
103-504	87
103-506	87
103-508	87
103-523PG	30
103-523PG-TH	30
103-524PG	30
103-524PG-TH	30
103-525	87
103-525PG	30
103-525PG-TH	30
103-526PG	30
103-527PG	30
103-528PG	30
103-533PG	30
103-533PG-TH	30
103-534MPG	31
103-534MPG-TH	31
103-534PG	30
103-534PG-TH	30
103-535PG	30
103-535PG-TH	30
103-543PG	32
103-543PG-TH	32
103-544PG	32
103-544PG-TH	32
103-554PG	31
103-554PG-TH	31
103-555PG	31
103-555PG-TH	31
103-563PG	31
103-564PG	31
103-565PG	31
103-603	87
103-604	87
103-606	87
103-608	87
103-610	87
103-612	87
103-625	87
104-080RVSSG	27
104-100RVSSG	27
104-125RVSSG	27
104-523PG	28
104-523PG-TH	28
104-524PG	28
104-524PG-TH	28
104-525PG	28

PART NUMBER	PAGE
104-525PG-TH	28
104-526PG	28
104-527PG	28
104-528PG	28
104-529PG	28
104-530PG	28
104-533PG	28
104-533PG-TH	28
104-534MPG	29
104-534MPG-TH	29
104-534PG	28
104-534PG-TH	28
104-535PG	28
104-543PG	30
104-543PG-TH	30
104-544PG	30
104-544PG-TH	30
104-545PG	30
104-554PG	29
104-554PG-TH	29
104-555PG	29
104-555PG-TH	29
104-563PG	29
104-564PG	29
104-565PG	29
105-003G	90
105-004G	90
105-005G	90
105-006G	90
105-007G	90
105-008G	90
105-080RVSSG	28
105-100RVSSG	28
105-103	92
105-103G	90
105-104	92
105-104G	90
105-105	92
105-105G	90
105-106	92
105-106G	90
105-107	92
105-107G	90
105-108	92
105-108G	90
105-109	92
105-109G	90
105-110	92
105-110G	90

PART NUMBER	PAGE
105-111	92
105-111G	90
105-125RVSSG	28
105-203	92
105-203G	90
105-204	92
105-204G	90
105-205	92
105-205G	90
105-206	92
105-206G	90
105-207	92
105-207G	90
105-208	92
105-208G	90
105-209G	90
105-210G	90
105-303	91
105-303G	88
105-304	91
105-304G	88
105-305	91
105-305G	88
105-306	91
105-306G	88
105-307	91
105-307G	88
105-308	91
105-308G	88
105-309	91
105-310	91
105-403	91
105-403G	88
105-404	91
105-404G	88
105-405	91
105-405G	88
105-406	91
105-406G	88
105-407	91
105-407G	88
105-408	91
105-408G	88
105-409	91
105-410	91
105-603G	89
105-604G	89
105-605G	89
105-606G	89

PART NUMBER	PAGE
105-607G	89
105-608G	89
105-613G	89
105-614G	89
105-615G	89
105-616G	89
105-617G	89
105-618G	89
105-623G	89
105-624G	89
105-625G	89
105-626G	89
105-627G	89
105-628G	89
105-633G	89
105-634G	89
105-635G	89
105-703	93
105-704	93
105-706	93
105-708	93
105-710	93
105-712	93
105-725	93
105-803	92
105-804	92
105-805	92
105-806	92
105-807	92
105-808	92
105-903	93
105-904	93
105-906	93
105-908	93
105-910	93
105-912	93
105-925	93
106-303G	94
106-304G	94
106-305G	94
106-306G	94
106-307G	94
106-308G	94
106-309G	94
106-310G	94
106-403G	94
106-404G	94
106-405G	94
106-406G	94

# PART NUMBER INDEX

PART NUMBER	PAGE
106-407G	94
106-408G	94
106-603	95
106-604	95
106-606	95
106-608	95
106-610	95
106-612	95
106-625	95
150-103G	24
150-104G	24
150-105G	24
150-106G	24
150-107G	24
150-108G	24
150-109G	24
150-110G	24
150-111G	24
150-113G	24
150-114G	24
150-115G	24
150-116G	24
150-117G	24
150-118G	24
150-119G	24
150-120G	24
150-121G	24
150-203G	23
150-204G	23
150-205G	23
150-206G	23
150-207G	23
150-208G	23
150-209XLCG	23
150-210XLCG	23
150-211XLCG	23
150-233G	25
150-234G	25
150-235G	25
150-563G	23
150-564G	23
150-565G	23
150-573G	24
150-574G	24
150-575G	24
150-603G	32, 106
150-603G	32, 106
150-604G	32, 106
150-604G	32, 106

PART NUMBER	PAGE
150-605G	32, 106
150-605G	32, 106
150-606G	32, 106
150-606G	32, 106
150-607G	32, 106
150-607G	32, 106
150-608G	32, 106
150-608G	32, 106
150-663G	32, 106
150-663G	32, 106
150-664G	32, 106
150-664G	32, 106
150-665G	32, 106
150-665G	32, 106
160-103	41
160-104	41
160-105	41
160-106	41
160-106G	19
160-107	41
160-107G	19
160-108	41
160-108G	19
160-503	42
160-504	42
160-505	42
160-506	42
160-507	42
160-508	42
170-103	41
170-104	41
170-105	41
170-106	41
170-107	41
170-108	41
180-103G-A	65
180-103G-A-C	65
180-103G-B	64
180-103G-B-C	64
180-103G-D	64
180-103G-D-C	64
180-103MFG-A-I	68
180-103MFG-B-I	68
180-103MFG-D-I	68
180-103MG-A-I	67
180-103MG-B-I	66
180-103MG-D-I	66
180-104G-A	65
180-104G-A-C	65

PART NUMBER	PAGE
180-104G-B	64
180-104G-B-C	64
180-104G-D	64
180-104G-D-C	64
180-104MFG-A-I	69
180-104MFG-B-I	68
180-104MFG-D-I	69
180-104MG-A-I	67
180-104MG-B-I	66
180-104MG-D-I	66
180-503G	70
180-504G	70
180-703G	70
180-704G	70
180-713G	70
180-714G	70
180-723G	70
180-724G	70
180-893	70
180-TPW	70
200-401SSG	10
200-401SSG-IH	11
200-401SSG-LH	10
200-402SSG	10
200-402SSG-IH	11
200-402SSG-LH	10
200-403SSG	10
200-403SSG-IH	11
200-403SSG-LH	10
200-404SSG	10
200-404SSG-IH	11
200-404SSG-LH	10
200-405SSG	10
200-405SSG-IH	11
200-405SSG-LH	10
200-406SSG	10
200-406SSG-IH	11
200-406SSG-LH	10
200-407SSG	10
200-407SSG-IH	11
200-407SSG-LH	10
200-408SSG	10
200-408SSG-IH	11
200-408SSG-LH	10
200-409SSG	10
200-409SSG-IH	11
200-409SSG-LH	10
200-410SSG	10
200-410SSG-IH	11

PART NUMBER	PAGE
200-410SSG-LH	10
200-413SSG	10
200-413SSG-IH	11
200-413SSG-LH	11
200-414SSG	10
200-414SSG-IH	11
200-414SSG-LH	11
200-415SSG	10
200-415SSG-IH	11
200-415SSG-LH	11
200-416SSG	10
200-416SSG-IH	11
200-416SSG-LH	11
200-417SSG	10
200-417SSG-IH	11
200-417SSG-LH	11
200-418SSG	10
200-418SSG-IH	11
200-418SSG-LH	11
200-419SSG	10
200-419SSG-IH	11
200-419SSG-LH	11
200-420SSG	10
200-420SSG-IH	11
200-420SSG-LH	11
200-701	36
200-701-IH	37
200-701-LH	36
200-702	36
200-702-IH	37
200-702-LH	36
200-703	36
200-703-IH	37
200-703-LH	36
200-704	36
200-704-IH	37
200-704-LH	36
200-705	36
200-705-IH	37
200-705-LH	36
200-706	36
200-706-IH	37
200-706-LH	36
200-707	36
200-707-IH	37
200-707-LH	36
200-708	36
200-708-IH	37
200-708-LH	36

# PART NUMBER INDEX

PART NUMBER	PAGE
200-803	36
200-803-IH	37
200-803-LH	37
200-804	36
200-804-IH	37
200-804-LH	37
200-805	36
200-805-IH	37
200-805-LH	37
200-806	36
200-806-IH	37
200-806-LH	37
200-807	36
200-807-IH	37
200-807-LH	37
200-808	36
200-808-IH	37
200-808-LH	37
201-003	119
201-003G	118
201-004	119
201-004G	118
201-103G	118
201-104G	118
201-123G	118
201-205G	121
201-206G	121
201-207G	121
201-208G	121
201-215G	121
201-216G	121
201-217G	121
201-218G	121
202-003G	120
202-004G	120
202-103G	120
202-104G	120
203-204G	122
210-203	107
210-204	107
210-205	107
210-206	107
210-207	107
210-208	107
210-209	107
210-210	107
210-211	107
210-223	108
210-224	108

PART NUMBER	PAGE
210-225	108
210-226	108
210-227	108
210-228	108
210-229	108
210-230	108
210-231	108
210-543	107
210-544	107
210-545	107
210-546	107
210-547	107
210-548	107
210-549	107
210-550	107
210-551	107
210-603	107
210-604	107
210-605	107
210-606	107
210-607	107
210-608	107
210-703	108
210-704	108
210-705	108
210-706	108
210-707	108
210-708	108
210-723	108
210-724	108
210-725	108
210-726	108
210-727	108
210-728	108
210-994	136
210-994c	136
210-995	136
210-995c	136
210-996	136
210-996c	136
210-997	136
210-997c	136
210-998	136
210-998c	136
210-999c	136
220-014	139
220-015	139
220-016	139
220-017	139

PART NUMBER	PAGE
220-103	139
220-104	139
220-105	139
220-106	139
220-204	136
220-205	136
220-206	136
220-223	137
220-223	138
220-224	137
220-224	138
220-225	137
220-226	138
220-228	138
220-300	134
220-301	134
220-302	134
220-303	134
220-305	134
220-306	134
220-323	138
220-324	138
220-326	138
220-328	138
220-400	138
220-514	137
220-515	137
220-516	137
220-517	137
220-984	136
220-985	136
220-986	136
220-987	136
220-994	135
220-994G	135
220-995	135
220-995G	135
220-996	135
220-996G	135
220-997	135
220-997G	135
221-014	141
221-015	141
221-016	141
221-017	141
221-018	141
221-114	141
221-115	141
221-116	141

PART NUMBER	PAGE
221-117	141
221-118	141
221-204	141
221-205	141
221-206	141
221-207	141
221-208	141
221-214	141
221-215	141
221-216	141
221-217	141
221-218	141
221-224	141
221-225	141
221-226	141
221-227	141
221-228	141
230-004	140
230-005	140
230-006	140
230-007	140
230-008	140
240-003B	110
240-003P	110
240-004B	110
240-004P	110
240-004T	110
240-005B	110
240-005P	110
240-005T	110
240-006B	110
240-006P	110
240-006T	110
240-007B	110
240-007P	110
240-007T	110
240-008B	110
240-008P	110
240-008T	110
241-004D	110
241-004P	110
241-004T	110
241-005D	110
241-005P	110
241-005T	110
241-006D	110
241-006P	110
241-006T	110
241-008T	110

# PART NUMBER INDEX

PART NUMBER	PAGE
242-005B	111
300-008	124
300-011	124
300-013	125
300-014	125
300-017CLAM	124
300-021CLAM	125
300-023CLAM	124
300-101	125
300-102	126
301-001	126
301-002	126
302-106	126
305-400	127
305-401	127
305-408	127
400-001	130
400-002	130
400-003	130
400-004	130
400-005	130
400-101	130
400-102	130
400-103	130
400-104	130
400-105	130
400-202	130
400-203	130
400-204	130
400-302	131
400-303	131
400-304	131
400-403	131
400-404	131
400-503	131
400-504	131
500-098	59
500-099	59
500-101	59
500-203	56
500-204	56
500-205	56
500-301	57
500-302	57
500-303	57
500-304	57
500-305	57
500-306	57
500-307	57

PART NUMBER	PAGE
500-308	57
500-310	57
500-311	57
500-343	58
500-344	58
500-345	58
500-346	58
500-347	58
500-348	58
500-350	58
500-351	58
500-358	57
500-368	57
500-376	58
500-378	58
500-403	51
500-404	51
500-405	51
500-406	51
500-407	51
500-408	51
500-503	52
500-504	52
500-505	52
500-506	52
500-507	52
500-508	52
500-803	47
500-804	47
500-805	47
500-806	47
500-807	47
500-808	47
500-833	47
500-833ss	47
500-834	47
500-834ss	47
500-835	47
500-835ss	47
500-836	47
500-836ss	47
500-837	47
500-837ss	47
500-838	47
500-838ss	47
501-308	57
501-358	57
511-308	58
600-02DSBL	76

PART NUMBER	PAGE
600-02DSEL	76
600-02DSPL	76
600-02DSVL	76
600-02H1CSFG	78
600-02H1CSFL	78
600-02H1CSMG	78
600-02H1CSML	78
600-02H1CSRSG	78
600-02H1CSRSL	78
600-02H1SSFSG	78
600-02H1SSFL	78
600-02H1SSMG	78
600-02H1SSML	78
600-02H1SSRG	78
600-02H1SSRSL	78
600-02H3CSRSG	79
600-02H3CSRSL	79
600-02H3SSRG	80
600-02H3SSRSL	80
600-03DSBL	76
600-03DSEL	76
600-03DSPL	76
600-03DSVL	76
600-03H1CSFG	78
600-03H1CSFL	78
600-03H1CSMG	78
600-03H1CSML	78
600-03H1CSRSG	78
600-03H1CSRSL	78
600-03H1SSFSG	78
600-03H1SSFL	78
600-03H1SSMG	78
600-03H1SSML	78
600-03H1SSRG	78
600-03H1SSRSL	78
600-03H3CSRSG	79
600-03H3CSRSL	79
600-03H3SSRG	80
600-03H3SSRSL	80
600-04DSBL	76
600-04DSEG	76
600-04DSEL	76
600-04DSPG	76
600-04DSPL	76
600-04DSVL	76
600-04H1CSFG	78
600-04H1CSFL	78
600-04H1CSMG	78
600-04H1CSML	78

PART NUMBER	PAGE
600-04H1CSRSG	78
600-04H1CSRSL	78
600-04H1SSFSG	78
600-04H1SSFL	78
600-04H1SSMG	78
600-04H1SSML	78
600-04H1SSRG	78
600-04H1SSRSL	78
600-04H3CSRSG	79
600-04H3CSRSL	79
600-04H3SSRG	80
600-04H3SSRSL	80
600-05DSBL	76
600-05DSEL	76
600-05DSPL	76
600-05DSVL	76
600-05H1CSFG	78
600-05H1CSFL	78
600-05H1CSMG	78
600-05H1CSML	78
600-05H1CSRSG	78
600-05H1CSRSL	78
600-05H1SSFSG	78
600-05H1SSFL	78
600-05H1SSMG	78
600-05H1SSML	78
600-05H1SSRG	78
600-05H1SSRSL	78
600-05H3CSRSG	79
600-05H3SSRG	80
600-06DSBL	76
600-06DSEG	76
600-06DSEL	76
600-06DSPG	76
600-06DSPL	76
600-06DSVL	76
600-06H1CSFG	78
600-06H1CSFL	78
600-06H1CSMG	78
600-06H1CSML	78
600-06H1CSRSG	78
600-06H1CSRSL	78
600-06H1SSFSG	78
600-06H1SSFL	78
600-06H1SSMG	78
600-06H1SSML	78
600-06H1SSRG	78
600-06H1SSRSL	78
600-06H3CSRSG	79

# PART NUMBER INDEX

PART NUMBER	PAGE
600-06H3SSRG	80
600-08DSBB	76
600-08DSEB	76
600-08DSEG	76
600-08DSPB	76
600-08DSPG	76
600-08DSVB	76
600-08H1CSFG	78
600-08H1CSMG	78
600-08H1CSRG	78
600-08H1SSFG	78
600-08H1SSMG	78
600-08H1SSRG	78
600-08H3CSRG	79
600-08H3SSRG	80
600-103	60
600-104	60
600-105	60
600-107	60
600-108	60
600-109	60
600-10DSBG	76
600-10DSEG	76
600-10DSPG	76
600-10DSVG	76
600-10H1CSFG	78
600-10H1CSMG	78
600-10H1CSRG	78
600-10H1SSFG	78
600-10H1SSMG	78
600-10H1SSRG	78
600-10H3CSRG	79
600-10H3SSRG	80
600-110	60
600-111	60
600-112	60
600-113	60
600-114	60
600-115	60
600-116	61
600-117	61
600-118	61
600-119	61
600-120	61
600-121	61
600-122	61
600-123	61
600-128	60
600-12DSBG	76

PART NUMBER	PAGE
600-12DSEG	76
600-12DSPG	76
600-12DSVG	76
600-12H1CSFG	78
600-12H1CSMG	78
600-12H1CSRG	78
600-12H1SSFG	78
600-12H1SSMG	78
600-12H1SSRG	78
600-12H3CSRG	79
600-12H3SSRG	80
600-130	60
600-131	60
600-132	60
600-133	60
600-136	61
600-137	61
600-138	61
600-139	61
600-141	61
600-143	61
600-14DSBG	76
600-14DSEG	76
600-14DSPG	76
600-14DSVG	76
600-14H1CSRG	78
600-14H1SSRG	78
600-16DSBG	76
600-16DSEG	76
600-16DSPG	76
600-16DSVG	76
600-16H1CSRG	78
600-16H1SSRG	78
600-18DSBG	76
600-18DSEG	76
600-18DSPG	76
600-18DSVG	76
600-18H1CSRG	78
600-18H1SSRG	78
600-203	54
600-204	54
600-205	54
600-207	54
600-208	54
600-209	54
600-20DSBG	76
600-20DSEG	76
600-20DSPG	76
600-20DSVG	76

PART NUMBER	PAGE
600-20H1CSRG	78
600-20H1SSRG	78
600-210	54
600-211	54
600-212	54
600-212DSBL	76
600-212DSEL	76
600-212DSPL	76
600-212DSVL	76
600-212H1CSFG	78
600-212H1CSFL	78
600-212H1CSMG	78
600-212H1CSML	78
600-212H1CSRG	78
600-212H1CSRL	78
600-212H1SSFG	78
600-212H1SSFL	78
600-212H1SSMG	78
600-212H1SSML	78
600-212H1SSRG	78
600-212H1SSRL	78
600-212H3CSRG	79
600-212H3CSRL	79
600-212H3SSRG	80
600-212H3SSRL	80
600-213	54
600-214	54
600-215	54
600-228	54
600-230	54
600-231	54
600-232	54
600-233	54
600-24DSBG	76
600-24DSEG	76
600-24DSPG	76
600-24DSVG	76
600-24H1CSRG	78
600-24H1SSRG	78
600-30DSEG	76
600-36DSEG	76
601-603	58
601-604	58
601-605	58
601-606	58
601-607	58
601-608	58
601-613	52
601-614	52

PART NUMBER	PAGE
601-615	52
601-616	52
601-617	52
601-618	52
601-623	59
601-624	59
601-625	59
601-626	59
601-627	59
601-628	59
601-633	52
601-634	52
601-635	52
601-636	52
601-637	52
601-638	52
701-103	116
701-103G	114
701-104	116
701-104G	114
701-105	116
701-105G	114
701-106	116
701-106G	114
701-107	116
701-107G	114
701-108	116
701-108G	114
701-304G	114
701-306G	114
701-403	116
701-404	116
701-405	116
701-406	116
701-407	116
701-408	116
701-413	116
701-414	116
701-415	116
701-416	116
701-417	116
701-418	116
701-503G	114
701-504G	114
701-505G	114
701-703G	115
701-704G	115
701-705G	115
701-706G	115

# PART NUMBER INDEX

PART NUMBER	PAGE
701-707G	115
701-708G	115
701-803G	115
701-804G	115
703-102	116
703-103	116
703-104	116
704-102	116
704-103	116
704-104	116
800-103ADDG	35
800-104ADDG	35
800-105ADDG	35
800-106ADDG	35
800-107ADDG	35
800-108ADDG	35
810-504G	20
810-505G	21
810-514G	20
810-524G	20
810-594G	21
810-604G	21
810-614G	21
899-113	139
899-114	139
899-115	139
899-117	139
899-123	137
899-123GWH	137
899-125	137
899-125GWH	137
899-128GWH	137
899-180	70
899-563	47
899-564	47
899-565	47
899-566	47
899-567	47
899-568	47
899-701	134
899-704	134
899-705	134
899-708	134
899-710	134
899-711	134
899-911	61
899-912	61
899-913	61
899-914	61

PART NUMBER	PAGE
899-915	61
899-916	61
899-917	61
899-918	61
899-919	61
899-920	61
899-921	61
899-943	61
899-944	61
899-945	61
899-946	61
899-947	61
899-948	61
899-981	61
899-982	61
899-983	61
899-984	61
899-985	61
899-986	61
899-987	61
899-988	61
900-02DSBL	76
900-02DSEL	76
900-02DSPL	76
900-02DSVL	76
900-03DSBL	76
900-03DSEL	76
900-03DSPL	76
900-03DSVL	76
900-04DSBL	76
900-04DSEL	76
900-04DSPL	76
900-04DSVL	76
900-05DSBL	76
900-05DSEL	76
900-05DSPL	76
900-05DSVL	76
900-06DSBL	76
900-06DSEL	76
900-06DSPL	76
900-06DSVL	76
900-08DSBB	76
900-08DSEB	76
900-08DSPB	76
900-08DSVB	76
900-10DSBG	76
900-10DSEG	76
900-10DSPG	76
900-10DSVG	76

PART NUMBER	PAGE
900-12DSBG	76
900-12DSEG	76
900-12DSPG	76
900-12DSVG	76
900-14DSBG	76
900-14DSEG	76
900-14DSPG	76
900-14DSVG	76
900-16DSBG	76
900-16DSEG	76
900-16DSPG	76
900-16DSVG	76
900-18DSBG	76
900-18DSEG	76
900-18DSPG	76
900-18DSVG	76
900-20DSBG	76
900-20DSEG	76
900-20DSPG	76
900-20DSVG	76
900-212DSBL	76
900-212DSEL	76
900-212DSPL	76
900-212DSVL	76
900-24DSBG	76
900-24DSEG	76
900-24DSPG	76
900-24DSVG	76
A1000-1	101
A1000-112	101
A1000-114	101
A1000-12	101
A1000-14	101
A1000-2	101
A1000-212	101
A1000-3	101
A1000-34	101
A1000-38	101
A1000-4	101
A1001-1	101
A1001-112	101
A1001-114	101
A1001-12	101
A1001-14	101
A1001-2	101
A1001-34	101
A1001-38	101
A101-1	100
A101-112	100

PART NUMBER	PAGE
A101-114	100
A101-12	100
A101-2	100
A101-34	100
A1B-A1C11	100
A2020D-1	101
A2020D-112	101
A2020D-114	101
A2020D-12	101
A2020D-2	101
A2020D-212	101
A2020D-3	101
A2020D-34	101
A2020D-4	101
A2B-A2C11	100
A3B-A3C11	100
A4B-A4C14	100
A751L-1	100
A751L-112	100
A751L-114	100
A751L-12	100
A751L-14	100
A751L-2	100
A751L-212	100
A751L-3	100
A751L-34	100
A751L-38	100
A751T-1	100
A751T-112	100
A751T-114	100
A751T-12	100
A751T-14	100
A751T-2	100
A751T-212	100
A751T-3	100
A751T-34	100
A751T-38	100
A766L-1	102
A766L-112	102
A766L-12	102
A766L-2	102
A766L-212	102
A766L-3	102
A766L-34	102
A766L-4	102
A766T-1	102
A766T-112	102
A766T-12	102
A766T-2	102

PART NUMBER	PAGE
A766T-212	102
A766T-3	102
A766T-34	102
A766T-4	102
A850L-1	102
A850L-112	102
A850L-114	102
A850L-12	102
A850L-14	102
A850L-2	102
A850L-34	102
A850L-38	102
A850T-1	102
A850T-112	102
A850T-114	102
A850T-12	102
A850T-14	102
A850T-2	102
A850T-34	102
A850T-38	102
AE-1400	98
AE-1400-24VAC	98
AE-1400-24VDC	98
AE-1400M	98
AE-180-120-12	98
AE-180-24VAC	98
AE-180-24VDC	98
AE-2100	98
AE-2100-24VAC	98
AE-2100-24VDC	98
AE-2100M	98
AE-3100	98
AE-3100-24VAC	98
AE-3100-24VDC	98
AE-3100M	98
AE-350	98
AE-350-24VDC	98
AE-4400	98
AE-4400-24VAC	98
AE-4400-24VDC	98
AE-4400M	98
AE-700	98
AE-7000	98
AE-7000-24VAC	98
AE-7000-24VDC	98
AE-7000M	98
AE-700-24VAC	98
AE-700-24VDC	98
AE-700M	98

PART NUMBER	PAGE
AE-880	98
AE-880-24VAC	98
AE-880-24VDC	98
AE-880M	98
AE-9700	98
AE-9700-24VAC	98
AE-9700-24VDC	98
AE-9700M	98
AEP-100	103
APP-200	104
ASC-120VAC	103
ASC-120VAC-XP	103
ASC-12VDC	103
ASC-240VAC	103
ASC-24VAC	103
ASC-24VDC	103
ASC-24VDC-XP	103
ASM-200	103
ASM-400	103
ASM-200	103
ASV-120	103
ASV-120VAC-N7	103
ASV-24VDC-27	103
ASV61-24VDC	103
BGO10	77
BGO12-14	77
BGO16	77
BGO18	77
BGO20	77
BGO2-3	77
BGO24	77
BGO4	77
BGO5-6	77
BGO8	77
BLH2-3	77
BLH4	77
BLH5-6	77
BLH8	77
FABRICATED	100
HPBGO10	81
HPBGO12	81
HPBGO14	81
HPBGO16	81
HPBGO18	81
HPBGO2	81
HPBGO2.5-5	81
HPBGO20	81
HPBGO24	81
HPBGO6-8	81

PART NUMBER	PAGE
HPLH2	80
HPLH2.5-5	80
HPLH2.5-5SS	80
HPLH2SS	80
HPLH6	80
HPLH6SS	80
JV-100-DA	99
JV-100-SR	99
JV-120-DA	99
JV-120-SR	99
JV-140-DA	99
JV-140-SR	99
JV-160-DA	99
JV-160-SR	99
JV-190-DA	99
JV-190-SR	99
JV-200-DA	99
JV-200-SR	99
JV-240-DA	99
JV-240-SR	99
JV-270-DA	99
JV-270-SR	99
JV-300-DA	99
JV-300-SR	99
JV-50-DA	99
JV-50-SR	99
JV-60-DA	99
JV-60-SR	99
JV-70-DA	99
JV-70-SR	99
JV-80-DA	99
JV-80-SR	99
JV-90-DA	99
JV-90-SR	99
MT1	103
TAF-AFF	72
TAF-BFF	72
TAF-CFF	72
TB-ACC	73
TB-AFF	73
TB-BCC	73
TB-BFF	73
TB-CCC	73
TB-CFF	73
TB-DCC	73
TB-DFF	73
TB-ECC	73
TB-EFF	73
TB-FCC	73

PART NUMBER	PAGE
TB-FFF	73
TBG-AFF	71
TBG-BFF	71
TG-ACC	74
TG-AFF	73
TG-BCC	74
TG-BFF	73
TG-CCC	74
TG-CFF	73
TG-DCC	74
TG-DFF	73
TG-ECC	74
TG-EFF	73
TG-FCC	74
TG-FFF	73
TGG-ACC	71
TGG-AFF	71
TGG-BCC	71
TGG-BFF	71
TGG-CCC	71
TGG-CFF	71
TGG-DCC	71
TGG-DFF	71
TGG-ECC	71
TGG-EFF	71
TGG-FCC	71
TG-GFF	74
TGG-FFF	71
TG-GGG	74
TG-HFF	74
TG-HGG	74
TG-IFF	74
TG-IGG	74
TG-KFF	74
TG-KGG	74
TG-LFF	74
TG-LGG	74
TG-MFF	74
TG-MGG	74
TG-NFF	74
TG-NGG	74
TRAA-BFF-Q	72
TRAB-BFF-Q	72

# TERMS AND CONDITIONS

UNLESS OTHERWISE SPECIFIED IN WRITING, THE FOLLOWING WILL PREVAIL:

## GENERAL

The possession of the Jomar International catalog and/or literature is not to be construed as an offer to sell the goods listed herein. All orders shall be subject to the approval and acceptance of Jomar International, dba Jomar Valve, hereinafter referred to as the Company, at its principal office in Warren, Michigan.

All Company proposals, all acceptances of Purchaser's orders, and all sales by the Company are expressly limited to, and expressly made conditional upon, the Purchaser's acceptance and assent to the Standard Terms and Conditions of Sale as set forth herein, notwithstanding receipt of, or acknowledgment of, the Purchaser's order form or specifications containing additional or different provisions, or conflicting oral representations by any agent or employee of the Company. No waiver, change or modification of any terms or conditions on the face or reverse hereof shall be binding on the Company unless made in writing and signed by an officer of the Company.

## PRICES AND TERMS

All prices are subject to change without notice. Minimum billing is \$50.00. Terms are 2% 10 days, NET 30 days subject to approved credit. Not applicable to credit card payments. Shipments can be expected, prior to establishing credit, by including check with order for full amount or specifying C.O.D. Any order originating outside the contiguous United States, Alaska, Hawaii or Canada shall be subject to an irrevocable letter of Credit confirmed by a U.S. bank or a sight draft. 1-1/2% per month service charge on all balances unpaid by the 1st of the following month (18%) annual interest rate.

## PERFORMANCE GUARANTEE

The Company guarantees to the original purchaser that the equipment of its manufacture will perform at rated capacity as stated only when (1) properly installed, connected, started, operated and maintained in accordance with Company Instruction(s), and or Information Guide(s), as revised from time to time, and (2) used for the applications specified and (3) used in the environments as specified or as limited. If equipment is part of a greater system, the Company accepts responsibility only for the equipment manufactured by it.

**THIS EQUIPMENT MUST BE INSTALLED, OPERATED, AND MAINTAINED IN ACCORDANCE WITH THE APPROPRIATE INSTRUCTION(S) AND/OR INFORMATION GUIDE(S), AS REVISED FROM TIME TO TIME, PURCHASERS OF THE COMPANY'S EQUIPMENT WAIVE SUBROGATION ON ALL ITEMS COVERED UNDER THEIR OWN OR OTHER INSURANCE.**

## LIMITED WARRANTY ON THE EQUIPMENT ITSELF

The Company, for a period of one year from the date of shipment, warrants each product or system of its own manufacture to the original purchaser to be free from defects in material and workmanship under normal use, service and maintenance. Normal use, service and maintenance means:

- Not in excess of the maximum pressures, temperatures, volumes and rated capacities or other parameters specified in the Company's Product Bulletins, Specification Sheets, and/or quotation(s).
- Using only fluids specified in the Company's Product Bulletins, Specification Sheets, and/or quotations.
- Operation and maintenance in compliance with the appropriate instructions and/or Information Guides.

## FREIGHT ALLOWANCE

All prices are FOB Warren, Michigan with full freight prepaid and allowed within the contiguous United States on shipments of \$2,500.00 net or more excluding ductile/cast iron, stainless steel, and carbon steel products which are \$3,500.00 or more. Any combination of products, items or sizes may be combined to satisfy the dollar amount required to earn full freight allowance. The Company reserves the right to select the most economical routing and shall not be liable by reason of the mode or route of shipment nor held responsible for any accessorial charges beyond the standard freight and fuel charges such as lift-gate, redelivery, re-consignment, residential, litigate surcharges, etc.

## EXPORT SHIPMENTS

All prices are FOB plant, Warren, Michigan, with full freight prepaid and allowed to Port of Exit on shipments of \$2,500.00 net or more, excluding ductile/cast iron, stainless steel, and carbon steel products which are \$3,500.00 or more.

## PACKAGING

All list prices are based on domestic packaging. For export packaging, contact the factory for pricing.

## DELIVERY

The quoted time of delivery is understood to be from date of receipt of all necessary information including Purchaser's approval, if applicable. Any delay in delivery of any installment shall not relieve purchaser of its obligation to accept remaining deliveries. The Company shall not be liable for damages or for cancellation of the contract as a result of any delay due to any cause beyond the Company's reasonable control including, but not limited to, act of God, act of the purchaser, embargo or other governmental acts, regulations or requirements, fire accident, labor disputes, war, civil insurrection or riot, delay in transportation or the inability to obtain necessary labor, materials or manufacturing facilities. In the event of any such delay the date of delivery shall be extended for a period equal to the time lost by reason of the delay. All shipments, unless otherwise specified, shall be FOB shipping point and the purchaser assumes responsibility for damage or loss in transit. The Company shall not be liable or responsible by reason of the mode or route of shipment. Products or goods not of Company manufacture supplied in piece, or as components to a system designed or sold by the Company, are not covered by this warranty. However, the Company will extend to the purchaser the benefit of such adjustment as is obtained from the manufacturer of that component or product.

This warranty does not apply to damage caused by any or all of the following circumstances or conditions:

- Freight damage.
- Parts and/or accessories or components not obtained from or approved by the Company.
- Any consequential or incidental damage arising from the use of the product, system or other goods manufactured or sold by the Company.
- Misapplication, misuse, abuse, or failure to follow the Product Instruction Sheets and/or Information Guides

The remedy under this warranty is limited to the repair or replacement of any parts found upon examination by the Company to have been defective, and shall not include removal and reinstallation costs involved in the exchange. The remedy shall be conditioned upon receipt of written notice by the Company of any alleged defects promptly after discovery thereof within the warranty period. Generally, consent, if given, will be upon the condition that the purchaser assumes and prepays all carrier charges.

**THIS WARRANTY IS EXCLUSIVE. THE COMPANY EXPRESSLY DISCLAIMS ANY AND ALL OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OR MERCHANT ABILITY OF FITNESS FOR A PARTICULAR PURPOSE OR, ANY PURPOSE.**

No person, including any dealer or representative of the Company, is authorized to make any representations concerning the Company products or systems on behalf of the Company or to assume for the Company the obligations contained in this warranty. The Company reserves the right to make design and other changes, modifications or improvements upon its products or systems, without any obligation to install same on any previously sold or delivered products or systems. This warranty gives the purchaser specific legal rights. The purchaser may have other rights that vary from state to state.

## DISPOSITION OF FREIGHT SHIPPING

Freight can be refused based on the following terms and conditions:

- Signs of Damage - It is imperative that prior to signing the Bill of Lading, check for discovered or concealed damage. Discovered damage can be evident on the outside of the box, crate, etc. Concealed damage can be found within the box/crate. Once damage is discovered, please document what you see, and if possible, take pictures to provide to our Customer Service team. Please note, signing for a damaged shipment without proper notation of damages is acknowledging that the shipment arrived undamaged. In addition, to avoid having our claim disputed, please have the truck driver call in the damaged goods to their office and provide an OS&D (Over, Short, & Damaged) claim number.
- Errors on Paperwork - The Bill of Lading should accurately represent exactly what is being shipped, the correct address, the billing party, etc. If there is an error where the shipment is being covered to the wrong address or person, you can refuse shipment.
- Duplicate Shipment - If you have received a duplicate shipment due to error on our part, you may refuse shipment.

In the event that you must refuse shipment, please contact our Customer Service team at 586.268.1220 or email [csr@jomar.com](mailto:csr@jomar.com).

## LIMITATION OF LIABILITY

It is expressly agreed that the liability is limited and the Company does not function as an insurer. The purchaser and/or user agree that the Company is not liable for loss, harm or damage due directly or indirectly to any occurrence of consequence therefrom. If the Company should be found liable to anyone in any theory (except any express warranty where the remedy is set forth in this document) for loss, harm, or damage, the liability of the Company shall be limited to the lesser of the actual loss, harm or damage, or the original purchase price of the involved equipment, system or service when sold (or when services performed by) the Company to its customer. This liability is exclusive and regardless of cause or origin resulting directly or indirectly to person or property from:

- The performance or non-performance of any obligation set forth in this warranty and warranty policy.
- Any agreement, oral or written, including specifications, between the Company and the customer.
- Negligence, active, passive or otherwise, of the Company or any of its agents, employees, or independent contractors.
- Breach of any judicially imposed warranty or covenant and,
- Misrepresentation or strict liability involvement.

## SPECIAL PRODUCTS

Special products produced to order, or products not normally stocked, are subject to a 10% overrun or underrun. Pattern equipment, tooling, etc., built for the manufacture of purchaser's products shall at all times remain in the possession of the Company. Since such equipment is made or supplied on a non-profit basis, it shall not be removed from the Company's plant except upon payment of a minimum 20% charge: based on the original equipment costs to cover engineering, drafting, and handling. The Company agrees to maintain such equipment except the major repairs or replacement would be at the purchaser's expense. If no orders have been received for production for a period of eighteen months, the Company accepts no liability for the continued existence or availability of such equipment after such period. Written notification advising the customer of the expiration date will not be required of the Company.

## BUYER'S PURCHASE ORDER TERMS

The terms on the purchase order shall not change, enlarge, or modify Company's liability or obligations.

## SHORTAGE AND BREAKAGE

The Company's responsibility for delivery of materials sold FOB shipping point ends when the receipt is obtained from the consignor of the transportation company. It is agreed that the purchaser shall notify the Company of any shortage within five (5) days from receipt of the material. In the event of loss or damage incurred in transit, the carrier shall be responsible and claims for parts broken or lost in shipment are to be filed with the transportation company by the company.

## CANCELLATION OF ORDERS

If, for any reason, the purchaser desires to cancel an order, such cancellation shall only be with written consent of the Company, and then only after payment is made to the Company for all costs incurred which shall include but not be limited to, material, labor, overhead, and reasonable profit.

## RETURNS AND RESTOCKING CHARGES

Equipment may be returned to Jomar Valve at 7243 Miller Drive, Warren, Michigan 48092, only upon prior written authorization of the Company. Consent, if given, will be upon the condition the purchaser assumes all carrier charges responsibility for damages in transit, and a minimum 15% restocking charge, and then only if the so authorized material is in new and unused condition and returned within one year from the original date of shipment. All returns are issued in the form of material credit toward future purchases. The credit will be based on the original invoice price or the current price, whichever is lower, less the applicable restocking charge. In the event that an end user contacts the Company's office, we will direct them to contact their point of purchase (e.g. Wholesaler) to process any returns.

## SERVICE

Unless otherwise noted herein, the cost of the equipment does not include service or installation. All services performed by the Company are subject to purchaser's payment of the Company's prevailing charges plus necessary travel and living expense.

## TAXES

Any tax or taxes that may be imposed upon the goods that are the subject of this sale, or upon the sale or delivery, shall be added to and become a part of the contract price.

## REGULATIONS

Every contract of sale shall be subject to all applicable state and federal statutes and regulations. The terms of this agreement shall be construed in accordance with the laws of the state of Michigan.



## WARRANTY AND LIMITATIONS OF LIABILITY

Jomar Group warrants, to its initial purchaser only, that its products which are delivered to this initial purchaser will be of the kind described in the order or price list and will be free of defects in workmanship or material.

## LIFETIME STEM LEAKAGE AND FIVE-YEAR BODY LIMITED WARRANTY

For Jomar Group's Italian valves listed below, this warranty is for a lifetime period covering leakage through the stem and a five year period from the date of shipment to you, our initial purchaser, covering leakage in or on the body. This warranty applies only to the Jomar Group products listed here:

T-100CG	T-82MG	T-203	175-LWN
S-100CG	T-100NE	T-203DU	175-LWIN
T-100CSSG	S-100NE	T-204	125-LWN
S-100CSSG	T-100SSE	T-204DU	125-LWN-S
JP-100G	T-100SSS	T-205	125-LWN-SA
JP-100G XLC	T-100FMN	TB-120G	175-LWIBP
JP-100SSG	S-100FMN	TB-130G	125-LWIBP
JP-100SSG XLC	T-100UE	TB-150G	125-LWBP
JP-100HCG	T-100STN	TB-120MG	175-LWBP
T-100-UEG	JP-100	TB-130MG	125-LWUBP
T-100HCG	JP-100 XLC	TB-150MG	175-LWMP
T-100FBG	S-100-DUE	TB-120MFG	
TWV-3W-KIT-G	T-82-M	TB-130MFG	
TWV-3W-KIT-G1		TB-150MFG	

## ONE YEAR LIMITED WARRANTY

Jomar Group warrants all other products, to be free of defects in workmanship or material for a period of one year from the date of shipment to you, our initial purchaser.

Should any failure to conform to these warranties appear within the stated period after the date of the initial shipment to our initial purchaser, Jomar Group will, upon written notification thereof and substantiation that the goods have been stored, installed, maintained and operated in accordance with Jomar Group's recommendations and standard industry practice, correct such defects by suitable repair or replacement at Jomar Group's own expense.

This warranty is exclusive and is in lieu of any implied warranty of merchantability, fitness for a particular purpose or other warranty of quality, whether expressed or implied, except the warranty of title and against patent infringement. Correction of non-conformities, in the manner and for the period of time provided above, shall constitute fulfillment of all liabilities of Jomar Group to our initial purchaser, with respect to the goods, whether based on contract, negligence, strict tort or otherwise. It is the intention of Jomar Group that no warranty of any kind, whether expressed or implied shall pass through our initial purchaser to any other person or corporation. Limitation of liability: Jomar Group shall not under any circumstances be liable for special or consequential damages such as, but not limited to, damages or to loss of other property or equipment, loss of profits or revenue, cost of capital, cost of purchased or replacement goods, or claims of customers of our initial purchaser. The remedies of our initial purchaser, and all others, set forth herein, are exclusive, and the liability of Jomar Group with respect to same shall not, except as expressly provided herein, exceed the price of the goods upon which such liability is based.


In the event that labor reimbursement is agreed upon due to defects in workmanship or material: Jomar Group will reference relevant published industry data to determine a reimbursement value, not to exceed \$75/man-hr and maximum assigned man-hrs per valve as published.

# COMPETITOR CROSS REFERENCE

JOMAR		NIBCO	APOLLO	MILWAUKEE	WATTS	LEGEND	RED WHITE	MATCO-NORCA
BALL VALVES	T-200CSSG	T-585-80-LF	77FLF-100/77CLF-100	UPBA-400	LFB6000			
	S-200CSSG	S-585-80-LF	77FLF-200/77CLF-200	UPBA-450	LFB6001			
	T-100CG					T-1001NL	5044AB	759TLF
	S-100CG					S-1001NL	5049AB	759SLF
	T-100CSSG	T-585-66-LF	77FLF-140	UPBA-400S	LFB6001			
	S-100CSSG	S-585-66-LF	77FLF-240	UPBA-450S	LFB6001			
	JP-100G	PC-FP600A-LF	77VLF/77WLF	UPBA-100 P2		P200NL	5020AB	759PLF
	JP-100SSG	PC-585-66-LF	77LWF-140	UPBA-100S			5020ABS	
	T-422G		EPXV		LFFBV-PEX-F1960	T-1960NL	3400RAB	754PXCELF
	T-200CSS	T-585-70	70-100/77F-100/77G-UL	BA-400	B6000			
	S-200CSS	S-585-70	70-100/77-100	BA-150	B6081			
	T-100NE					T-1001	5044F	759T
	T-100SSE	T-585-70-66	70-140	BA-400S	B6000-SS		5544S	
	T-100SSS	T-585-70-66-ST	70-140-64W	BA-400S3				
	T-100FMN	MTT585-70	70-800	BA-100-M			5581	
	T-100STN		GB-50			T-1100	5060	754DTLF
	JP-100	PC-585-70	77W	BA-100 P2		P-200	5020	
	T-82M / T-83C		94 MBV			T-800/900	5080	755/759MF
	T-CS-1001N-SS	TC-580-CS-R-66-LL	73A-100	20CSOR-N1-LL	C-FBV-1	T-730	7770	25CS
	T-CS-1000N-SS-4B	T-595-CS-R-66-LL	83-100	30CSOF-02-LL				30CS
T-SS-1001N	T-585-S6-R-66-LL	76F-100	20SSOR-N1-LL	S-FBV-1	T-712	4880	20SS	
T-SS-1000N-4B	T-595-S6-R-66-LL	86R-100	30SSOF-02-LL		T-717	4660	30SS	

JOMAR		NIBCO	CALEFFI	BELL AND GOSSETT	IMI	VICTAULIC	ARMSTRONG	MACON	ACORN	THERMOMEGATECH
BALANCING VALVES	RECIRCSETTER™ TB-120G			TEMPSETTER		THERM ZERO			TEMPFLOW	CS
	RECIRCSETTER™ TB-130G			THERMOSETTER						CSUTD
	RECIRCSETTER™ TB-150G			THERMOSETTER						
	TBG	T/S-1805	FLO-SET	CIRCUIT SETTER	UA ZERO		CBV-LF	MB		
	TGG-FNPT	T-1810-LF	FLO-SET	CIRCUIT SETTER		TA SERIES 790		STV LOW LEAD		
	TGG-SWT	S-1810-LF	FLO-SET	CIRCUIT SETTER				STVL LOW LEAD		
	TAF LEAD FREE	T/S-1880			ICSS LEAD FREE		ICSS	AL LOW LEAD		
	TB-FNPT	T-1805	FLO-SET	CIRCUIT SETTER	UA		CBV			
	TB-SWT	S-1805	FLO-SET	CIRCUIT SETTER	UA					
	TG-FNPT	T-1810	QUICKSETTER	CIRCUIT SETTER						
	TG-SWT	S-1810	QUICKSETTER	CIRCUIT SETTER						
	TG-FLANGED	F739		CIRCUIT SETTER	VF	TA SERIES 788	CBV-GS	VF		
	TG-GROOVED				VG	TA SERIES 789	CBV-FS	VG		

	JOMAR	NIBCO	APOLLO	MILWAUKEE	WATTS	LEGEND	RED WHITE	MATCO-NORCA
BUTTERFLY VALVES	BFV-LUG (E)	LD-2022	LD141	ML134E	BF-03	T-365SS	938DEML	B5LE
	BFV-LUG (B)	LD-2122	LD141	ML134B	BF-03	T-367SS	938DNML	B5LB
	BFV-LUG (P)							
	BFV-LUG (V)	LD-2222	LD141	ML234V	BF-03			
	BFV-WAFER (E)	WD-2022	WD141	MW134E	BF-04	T-335SS	937DEML	B5WE
	BFV-WAFER (B)	WD-2122	WD141	MW134B	BF-04	T-337SS	937SNML	B5WB
	BFV-WAFER (P)							
	BFV-WAFER (V)	WD-2222	WD141		BF-04			
	HPBFV-CS-150	G1L-CSSR	215L	HP1LCS				
	HPBFV-SS-150	G1L-SSSR	215L	HP1WCS				
	HPBFV-CS-300	G1W-CSR	215W	HP1LSS				
	HPBFV-SS-300	G1W-SSSR	215W	HP1WSS				
GATE VALVES	T-351G	T-111-LF	101T-LF	UP148				512LF
	S-351G	S-111-LF	101S-LF	UP149				512LF
	T-301G	T-113-LF	102T-LF	UP667	LFWGV	T-401NL	267AB	514TLF
	S-301G	S-113-LF	102S-LF	UP668	LFWGV	S-401NL	268AB	514CLF
	T-301	TI-8	102T	105	WGV-X	T-401	267	514T
	S-301	SI-8	102S	115	LFWGV	S-401	268	514C
	F-351	F-619	610F	F-2882	405-NRS-RW	T-301	415	100F
	F-361	F-617-0	611F	F-2885	408-OSY-RW	T-303	421	105F
	T-511G	T-413-Y-LF	163T-LF			T-453NL	236AB	
	S-511G	S-413-Y-LF	163S-LF			S-453NL	237AB	
	T-521G	T-480-Y-LF	61LF-100	UP548T	LF600 / LF601	T-450NL	232AB	525TFL
	S-521G	S-480-Y-LF		UP1548T	LF601S	S-455NL	233AB	525CLF
CHECK VALVES	T-501G			UP509	LFWCV	T-451NL	246AB	521TLF
	S-501G			UP1509	LFWCVS	S-451NL	247AB	521CLF
	P-501G			UP969		P-451NL		
	T-511	T-413-Y	164T	515Y	CVY	T-453	236B	532T
	S-511	S-413-Y	161S	1509Y	CVYS	S-453		532C
	T-501	TI-3		509		T-451	246	521T
	S-501	SI-3		1509		S-451	247	521C
	T-550					T-750	884	60SS
	F-571	F-918-N	920F	F-2974	411	T-311	435	115F
	F-591	W-910-SS	910WB-LF	8800	ICV-125-2-2-T	T-312	442	CVC
	T-100FBG							
	STRAINERS	T-651G	T221A	59-LF			T-15NL	380AB
S-651G		S221A	59LF-300			S-15NL	387AB	145CLF
F-651		F-751-A	YCF		77F-DI-125	T-19	381	140F

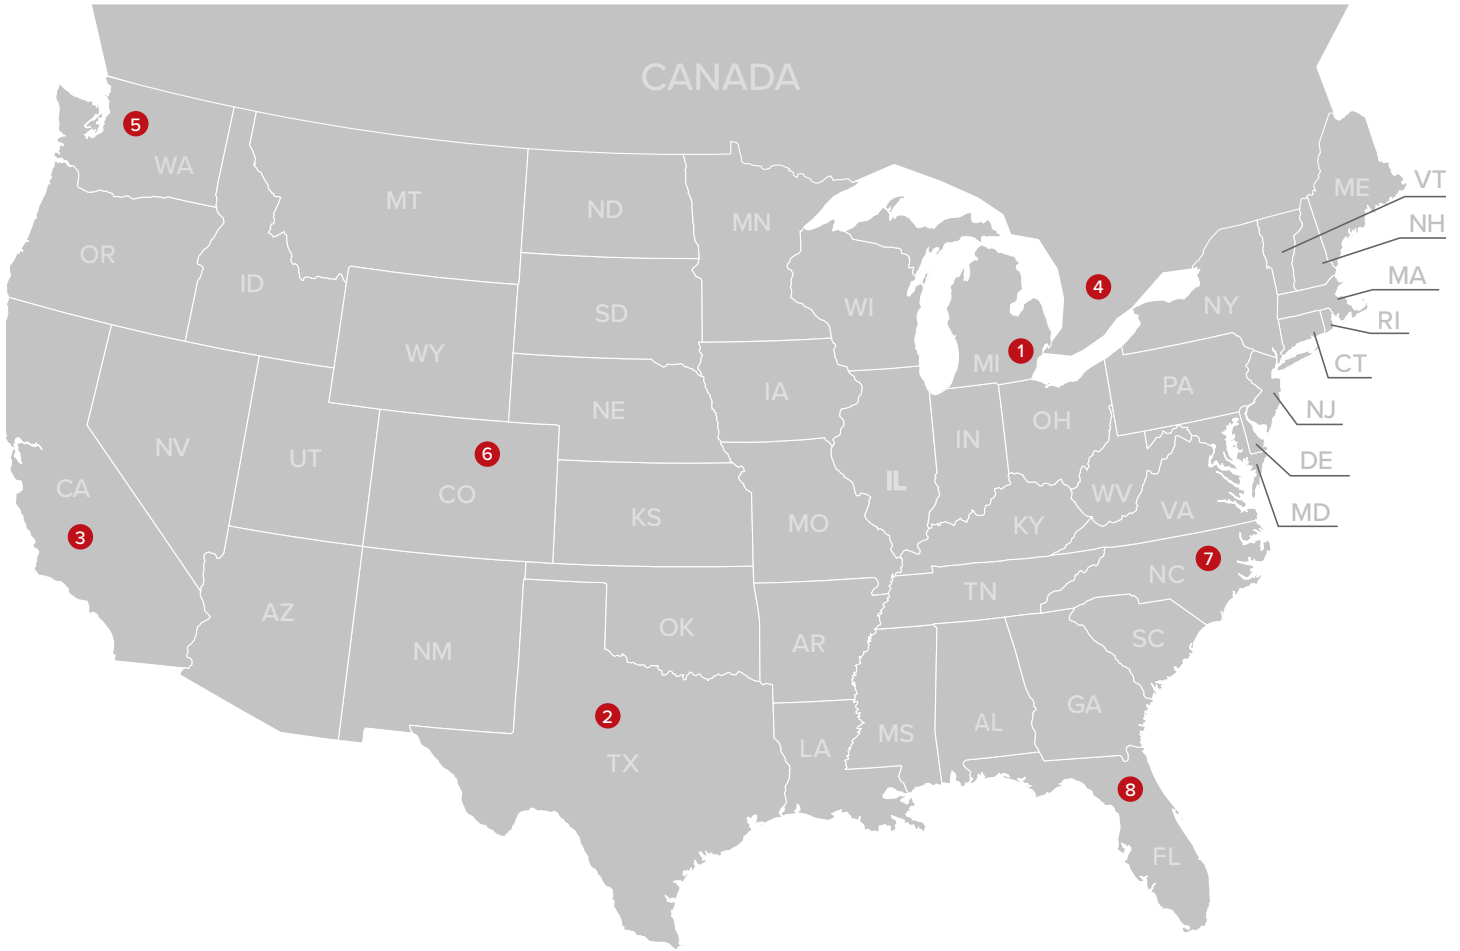

## STOCKING WAREHOUSES

### 1. JOMAR VALVE

WARREN, MI 48092  
586.268.1220  
MI

### 2. JIM BRYCE & ASSOCIATES

DALLAS, TX 75220  
972.737.3981  
TX

### 3. MAINLINE SALES

ANAHEIM, CA 92805  
877.300.9346  
SOUTHERN CA,  
NV (LAS VEGAS)

### 4. NEO VALVES LTD

VAUGHAN, ON L4L 085  
905.264.6556  
CANADA

### 5. NORPAC

KENT, WA 98031  
253.850.8800  
AK, NORTH ID, OR, WA

### 6. RKR

DENVER, CO 80216  
303.321.7610  
CO, ID, MT, NM, TX (EL PASO), WY

### 7. SNIDER

CHARLOTTE, NC 28273  
704.588.0915  
NC, SC

### 8. THE SPIRIT GROUP

ORLANDO, FL 32803  
407.291.6035  
FL



