



# Liquid Propane Dielectric Union



## Brass MIP x Flare, 250 PSI

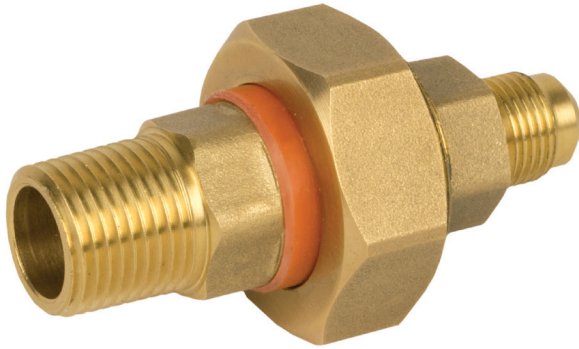

**Brass MIP x Flare**

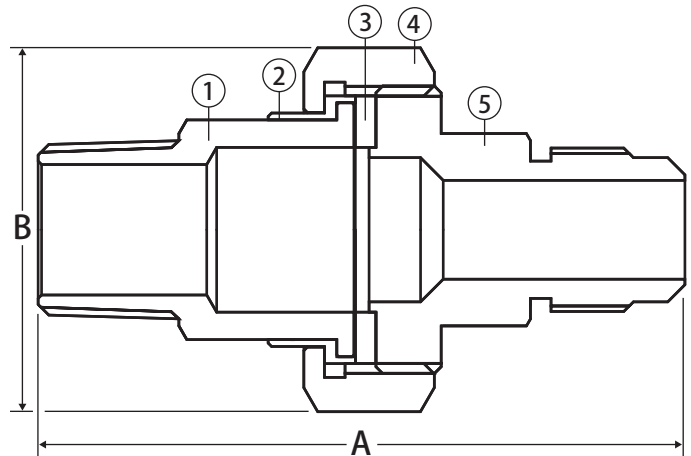

### Features

- Meets NFPA 58 Dielectric Union Requirement
- For Use in Propane Applications
- Prevents Accelerated Corrosion
- HNBR Seal: 40° F to 180° F

### Approvals

- ANSI B1.20.1
- Flare Connection in accordance with NFPA 54/ANSI Z223.1

### Material Specifications

No.	Part	Materials
1	Tail Piece	Brass - 37700
2	O-ring	PE Plastic
3	Gasket	HNBR
4	Nut	Brass - 37700
5	Body	Brass - 37700

### Dimensions

Part No.	Size	A	B
703-102	1/2" MIP x 3/8" FL	3.27	1.58
703-103	1/2" MIP x 1/2" FL	3.42	1.58
703-104	1/2" MIP x 5/8" FL	3.54	1.58
704-102	3/4" MIP x 3/8" FL	3.55	1.81
704-103	3/4" MIP x 1/2" FL	3.69	1.81
704-104	3/4" MIP x 5/8" FL	3.72	1.81