

THE ONLY HEAT-TREATED DZR BRASS ON THE MARKET




T-100 SERIES

Superior quality, performance, and more certifications and ratings than any other valve platform.



(dependent on model)

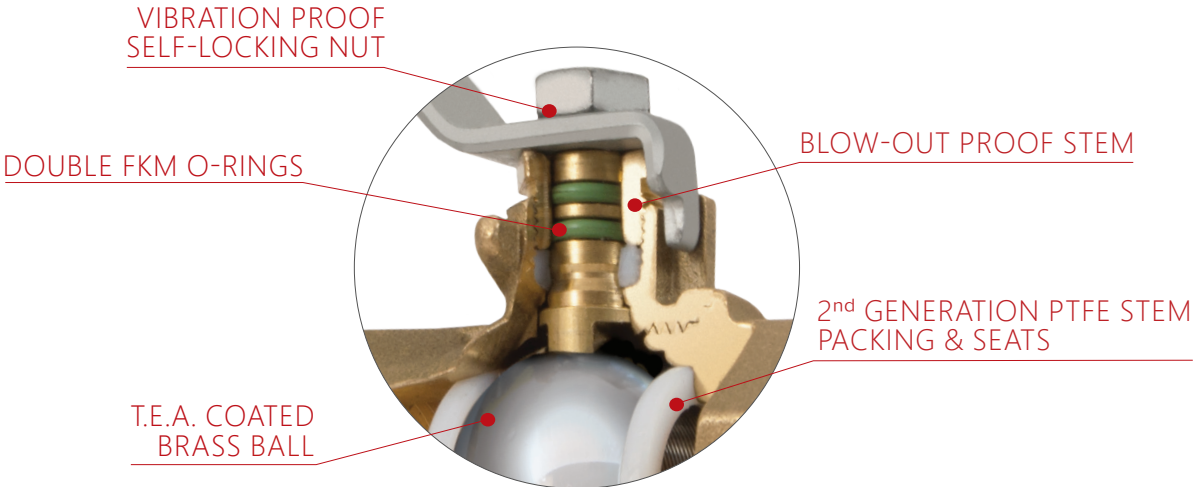

- ✓ 2-PIECE, FULL PORT, 600 WOG
- ✓ THREADED CONNECTIONS
- ✓ TRIPLE STEM SEAL LIFETIME WARRANTY
- ✓ 100% TESTED

- ✓ 100% MADE IN ITALY
 - ✓ LEAD FREE & DEZINCIFICATION RESISTANT*
 - ✓ OPTIONAL STAINLESS STEEL TRIM *
- *on select T-100 models

SURPASSES THE COMPETITION IN

QUALITY • CONSTRUCTION • PERFORMANCE • APPROVALS

| | | JOMAR | COMPETITORS | | | | | | |
|-----------|---------------------------------|-------------|-------------|--------|--------|--------|------------------------|----------|--------|
| | | JOMAR T-100 | 70-100 | FBV-3 | T-585 | 8901 | 5044F | 1001 | 58 |
| APPROVALS | UL 125 | X | | X | | X | X | | |
| | UL 842 | X | | | | X | X | X | |
| | UL C | X | | | | X | | | |
| | FM | X | | X | | X | X | X | X |
| | CSA | X | | X | | X | X | X | X |
| | DELTA C | X | | | | | | | |
| SPECS | STEM SEAL | TRIPLE | DOUBLE | DOUBLE | DOUBLE | DOUBLE | DOUBLE | DOUBLE | DOUBLE |
| | BALL | T.E.A. | CHROME | CHROME | CHROME | CHROME | CHROME | CHROME | CHROME |
| | SEATS | G300 | PTFE | PTFE | PTFE | PTFE | PTFE | PTFE | PTFE |
| | HANDLE & NUT | GEOMET | ZINC | CHROME | ZINC | ZINC | GEOMET (H) ZINC (N) | DACROMET | ZINC |
| TESTS | CYCLE TEST AVERAGE* (1/2" - 1") | 12,011 | 1,054 | 5,907 | 2,174 | 3,575 | 4,776 | - | - |

*Results are from IAPMO Research and Testing, Inc. to determine number of on-off cycles the valves could withstand at 600 PSI before leaking occurred at the stem.



T-100NE

UL Listed (1/4" - 2")

- VQGU - Trim & drain
- MHKZ - Manual valves
- YQNZ - Compressed gas shut-off valves
- YRBX - Flammable liquid shut-off valves
- YRPV - Gas shut-off valves
- YSDT - LP gas shut-off valves
- SFJQ - Valves, refrigerant

CSA Certified

- ANSI Z21.15 (.5 PSIG) (1/4" - 3")
- ASME B16.33 (125 PSIG) (1/2" - 2")
- ASME B16.38 (125PSIG) (2-1/2" - 4")
- CSA 3.16 -15 (125 PSI) (1/4" - 4")
- CGA 9.2 (1/4" - 3")
- Delta C (3/8" - 3/4")

MSS SP-110

ANSI B1.20.1

FM Approval*

(1/4" - 3/4" 600 WOG, 1" - 2" 500 WOG)



*on select models

T-100CG

NSF 372*

NSF 61-8*

NSF 61-Annex G*

MSS SP-110

ANSI B1.20.1

LEARN MORE

JOMARVALVE.COM

