
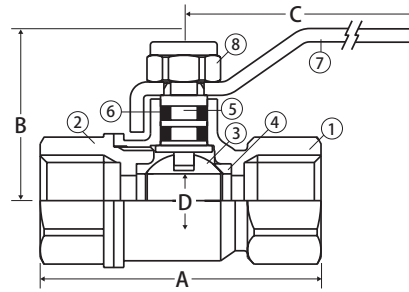
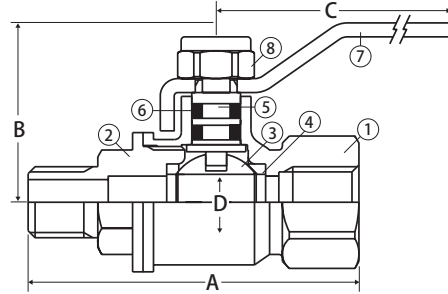


Brass Ball Valve

Mini Valves, 2 Piece, Full Port, Threaded Connection, 600 WOG

T-83C

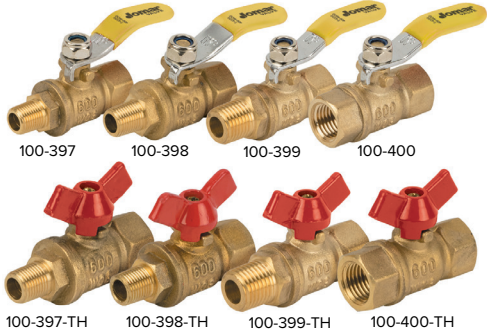

FEATURES


- 2 Buna-N O-Rings
- Large Raised Wrench Flats

CERTIFICATIONS/APPROVALS

- MSS SP-110
- ANSI B1.20.1

VALVE SEAT RATING

600 WOG - 150 WSP

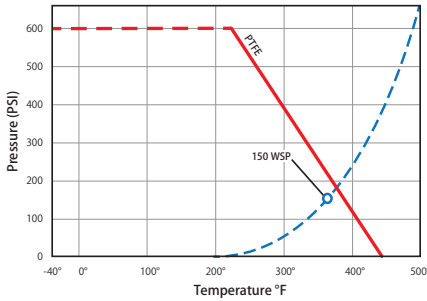

MATERIALS

No.	Part	Material
1	Body	Brass - C37700
2	End Connection	Brass - C37700
3	Ball	Chrome Plated Brass - C37700
4	Seat (2)	PTFE
5	Stem	Brass - C37700
6	Stem O-ring (2)	Buna-N
7	Handle*	Steel - Chrome Plated or Aluminum
8	Handle Nut / Screw*	Steel - Chrome Plated

*Material Depends on Handle Selection

DIMENSIONS

Part No	Size	A	B	C	D	C _v
Lever Handle						
100-397	1/8" FIP x 1/8" MIP	1.9	1.07	1.77	0.28	4.63
100-398	1/4" FIP x 1/8" MIP	1.93	1.07	1.77	0.28	4.63
100-399	1/4" FIP x 1/4" MIP	2.01	1.07	1.77	0.28	4.63
100-400	1/4" FIP x 1/4" FIP	1.65	1.07	1.77	0.28	4.63
T-Handle						
100-397-TH	1/8" FIP x 1/8" MIP	1.9	1.1	1.33	0.28	4.63
100-398-TH	1/4" FIP x 1/8" MIP	1.93	1.1	1.33	0.28	4.63
100-399-TH	1/4" FIP x 1/4" MIP	2.01	1.1	1.33	0.28	4.63
100-400-TH	1/4" FIP x 1/4" FIP	1.65	1.1	1.33	0.28	4.63