

# 5600 Series Multiple Wattage Fan Forced Unit Heater

## Product Specifications

### CASING & CONSTRUCTION:

Fabricated of die formed, heavy gauge steel and finished with two tone, brown and beige, durable powder coated paint. Supply air is drawn through the rear heavy duty expanded steel inlet grill. Heated air is discharged through front adjustable louvers, which are spring loaded for individual adjustment. Made in U.S.A.

**ELEMENT:** Heavy-duty block fin element design. The multiple tap electric connection design allows field conversion to eight wattage settings at 208/240-Volt single phase or 240/480 Volt, 3 phase. Units are available on special order with a specific wattage/voltage setting.

**MOTOR:** Motor shall be totally enclosed, permanently lubricated, all angle industrial rated with thermal overload protection.

**WIRING:** Wiring to terminal block adjacent to incoming knockout in accordance with NEC and local codes.

**THERMAL OVERLOAD:** All heaters shall be equipped with an automatic reset thermal cutout to shut down the element and motor circuits if unsafe operating temperatures are exceeded.

**CONTROLS:** The heater shall have a heavy-duty hydraulic thermostat factory installed and wired. All controls and wiring shall be in a large wiring compartment with hinged door for easy access. An optional disconnect switch shall be available for field installation.


**MOUNTING:** Heaters are standard with a three position-mounting bracket for wall, ceiling or workbench. Heaters can be mounted for horizontal or vertical discharge. Note: Minimum mounting height is 6 feet, and minimum distance from side of heater to nearest wall is 6 inches. Note: Approved for residential applications.



Front view



## Product Dimensions

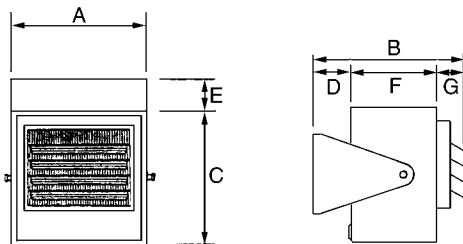

A	B	C	D	E	F	G
14"	12 11/16"	14"	1 1/16"	1 1/16"	9"	2 3/4"

## Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	WATTS	BTUs	VOLTS	PHASE	AMPS	TEMP RISE	AIR THROW	CFM	WT. (LBS)		
07072802	HF5605T	5000	17065	240	1	21	57 °F	16'	275	32		
		4165	14215			17	48 °F					
		3332	11365			14	38 °F					
		07072902	H3H5605T	2500	8533	208	1	10	29 °F	16'	275	32
				3750	12798			18	43 °F			
				3123	10659			15	36 °F			
				2500	8553			12	29 °F			
07073002	P3P5605T	1874	6396	480	3	9	21 °F	16'	275	32		
07073602	DCS-MT303	3750	12799			208	3				10.4	57 °F
		5000	17065	240	3	12	57 °F	16'	275	32		
		5000	17065	480	3	6	57 °F	16'	275	32		
Optional Field Installed Disconnect Switch, 30 Amp @ 600Volts												
For 24V control on single phase models delete "T" suffix												