


5700 Series Confined Space Plenum Rated Heater



Features

- Easily fits between joists for typical installation.
- Zero clearance for wall and ceiling mounting as well as floor mounting with appropriate inlet and outlet clearances.
- Bracket standard or can be mounted by 3/8" threaded rod (field supplied)
- Automatic reset thermal limit for safety
- 1 Phase model wattage field changeable from 1874 to 5000 Watts.
- 24V control circuit on three phase models with hydraulic thermostat
- Made in U.S.A
Conforms to ANSI/UL 1995
Certified to CAN/CSA C 22.2 No.236-11

Product Dimensions

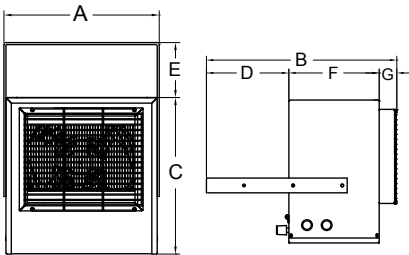

| A | B | C | D | E | F | G |
|-------|-------|-------|------|------|------|------|
| 14.4" | 19.4" | 14.5" | 8.4" | 5.1" | 9.2" | 1.8" |

Standard Models

| UPC# | MODEL | WATTS | BTU's | VOLTS | PHASE | AMPS | TEMP RISE | AIR THROW | CFM | WT. (LBS) | | |
|--------|-----------|---|----------|-------|-------|-------|-----------|-----------|-------|-----------|-----|----|
| 726245 | HF5705T | 5000 | 17065 | 240 | 1 | 21 | 57 °F | 16' | 275 | 32 | | |
| | | 4165 | 14215 | | | 17 | 48 °F | | | | | |
| | | 3332 | 11365 | | | 14 | 38 °F | | | | | |
| | | 726252 | H3H5705T | 2500 | 8533 | 208 | 1 | 10 | 29 °F | 16' | 275 | 32 |
| | | | | 3750 | 12798 | | | 18 | 43 °F | | | |
| | | | | 3123 | 10659 | | | 15 | 36 °F | | | |
| | | | | 2500 | 8553 | | | 12 | 29 °F | | | |
| 726269 | P3P5705T | 1874 | 6396 | 9 | 21 °F | | | | | | | |
| 726252 | H3H5705T | 3750 | 12799 | 208 | 3 | 10.4 | 57 °F | 16' | 375 | 32 | | |
| 5000 | | 17065 | 240 | 3 | 12 | 57 °F | 16' | 275 | 32 | | | |
| 726269 | P3P5705T | 5000 | 17065 | 480 | 3 | 6 | 57 °F | 16' | 275 | 32 | | |
| 707367 | DCS-MT303 | Optional Field Installed Disconnect Switch, 30 Amp @ 600Volts | | | | | | | | | | |