

SUBMITTAL DATA convector model PL


Model PL Fully-Recessed Wall Mounted

Job Name and Location _____ Date _____

Architect _____ Engineer _____ Sheet _____ of _____

Contractor _____ Order No. _____

Submitted by _____

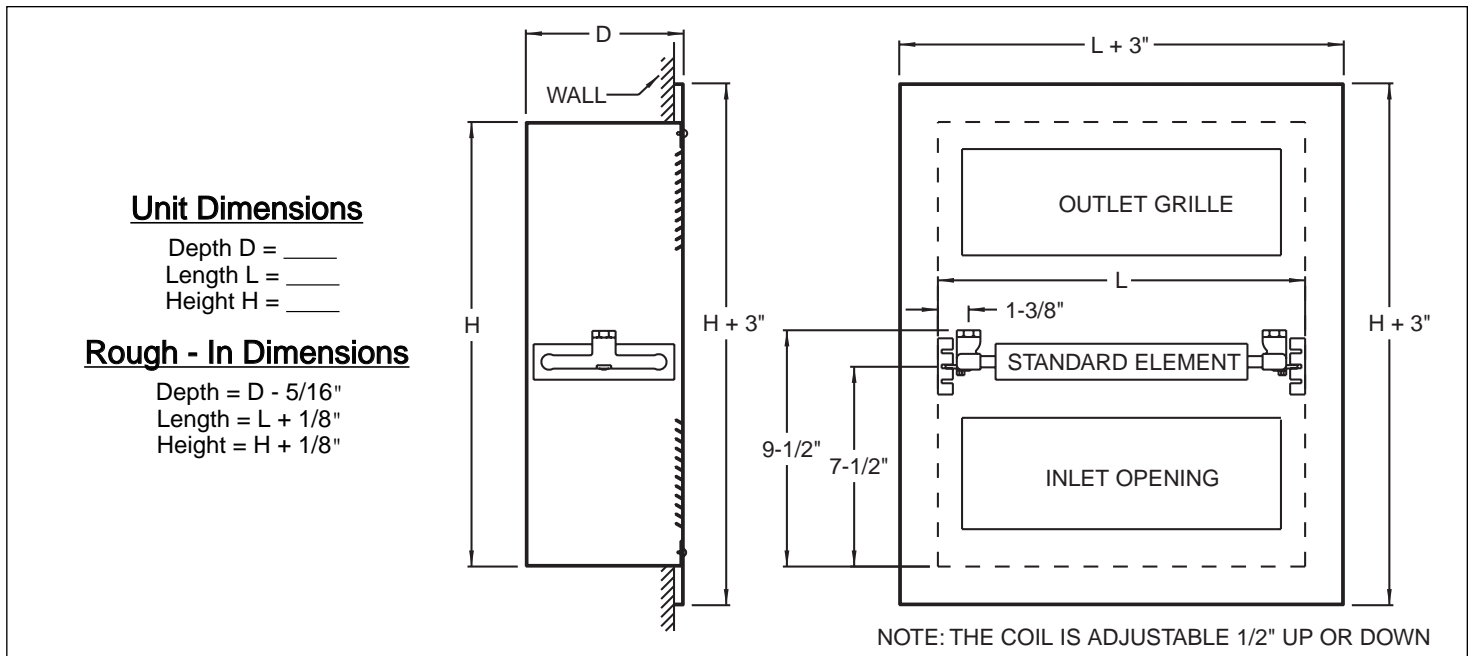

Heating Element

Copper tube mechanically fastened to 0.010" aluminum fins.
 Element to have a nominal depth of:

4" w/ 2 tubes 6" w/ 3 tubes 6" w/ 4 tubes

Standard cast brass headers with top and bottom connections
 Optional reverse header connections

Enclosure Specifications

Dimensions specified above
 Enclosure metal gauge:

| | |
|--|---|
| <input type="checkbox"/> 20 ga. liner, 18 ga. front (Standard) | <input type="checkbox"/> 20 ga. liner, 14 ga. front |
| <input type="checkbox"/> 18 ga. liner, 18 ga. front | <input type="checkbox"/> 18 ga. liner, 14 ga. front |
| <input type="checkbox"/> 20 ga. liner, 16 ga. front | <input type="checkbox"/> 16 ga. liner, 14 ga. front |
| <input type="checkbox"/> 18 ga. liner, 16 ga. front | <input type="checkbox"/> 14 ga. liner, 14 ga. front |
| <input type="checkbox"/> 16 ga. liner, 16 ga. front | |

Enclosure Color (see Color Chart):

| | | | |
|---|--------------------------------|------------------------------------|-------------------------------|
| <input type="checkbox"/> Prime (Standard) | <input type="checkbox"/> Ivory | <input type="checkbox"/> Bronze | <input type="checkbox"/> Gray |
| <input type="checkbox"/> Beige | <input type="checkbox"/> White | <input type="checkbox"/> Dark Gray | |

Performance

| Steam |
|-----------------------------|
| Pressure: _____ psi |
| Entering Air Temp: _____ °F |
| Rating: _____ Btu/Hr |

| Hot Water |
|-----------------------------|
| Avg. Water Temp.: _____ °F |
| Water Flow Rate: _____ GPM |
| Entering Air Temp: _____ °F |
| Rating: _____ Btu/Hr |

Options

Dampers

- None (Standard) Security Allen Key
- Standard Knob

Grill

- Louvered (Standard) Bar Grill - Aluminum (Inlet/Outlet)
- Perforated (Inlet/Outlet) Arched Inlet/Louvered Outlet

Fasteners

- Phillips (Standard) Spanner

End Pockets

- Left Hand Right Hand Left & Right Hand

Insulation

- None Back Sides, Back, & Top

Overlap

- 4-Sided Overlap (Standard) 3-Sided Overlap

Other: _____

Model PL Fully-Recessed Wall Mounted

Access Doors

- Available in any of the standard numbered locations illustrated.
- Doors are 6" high x 6" wide for convectors with a height of 20" or greater. 4" high x 5" wide for convectors with a height less than 20".
- Hinged on the top of the convector with a piano type hinge.
- Located in end pockets on convectors with end pockets.
- Fasten with cam-type locking device.

Access Doors Location

- 3 4
- 1 2
- 5 6

Access Door Hardware

- Slot Head (Standard)
- Security Allen Key Latch
- Security Spanner Head Latch

