

## SUBMITTAL DATA convector model SF


### Model SF Slope-Top Floor Mounted

Job Name and Location \_\_\_\_\_ Date \_\_\_\_\_

Architect \_\_\_\_\_ Engineer \_\_\_\_\_ Sheet \_\_\_\_\_ of \_\_\_\_\_

Contractor \_\_\_\_\_ Order No. \_\_\_\_\_

Submitted by \_\_\_\_\_

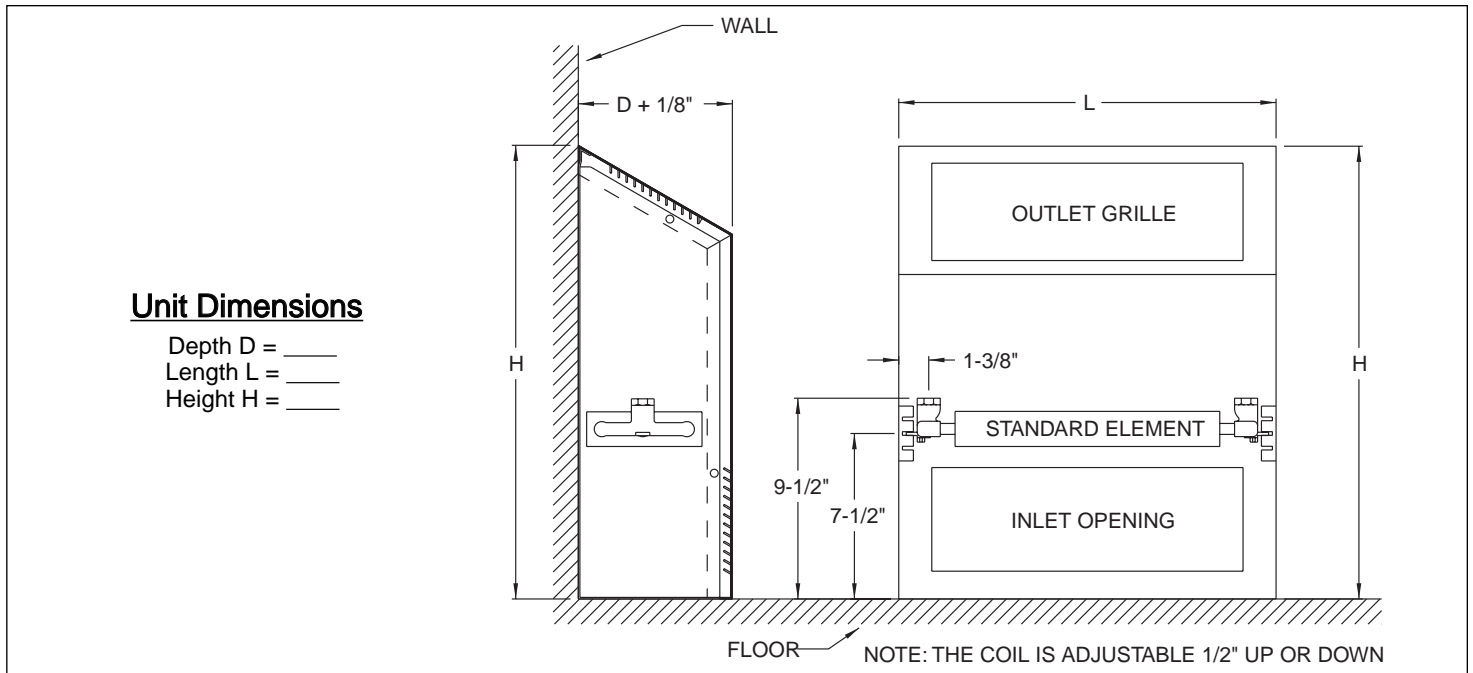

#### Unit Dimensions

Depth D = \_\_\_\_\_  
 Length L = \_\_\_\_\_  
 Height H = \_\_\_\_\_

#### Heating Element

Copper tube mechanically fastened to 0.010" aluminum fins.  
 Element to have a nominal depth of:  
 4" w/ 2 tubes     6" w/ 3 tubes     6" w/ 4 tubes

Standard cast brass headers with top and bottom connections  
 Optional reverse header connections

#### Enclosure Specifications

Dimensions specified above  
 Enclosure metal gauge:  
 20 ga. liner, 18 ga. front (Standard)  
 18 ga. liner, 18 ga. front                       20 ga. liner, 14 ga. front  
 20 ga. liner, 16 ga. front                       18 ga. liner, 14 ga. front  
 18 ga. liner, 16 ga. front                       16 ga. liner, 14 ga. front  
 16 ga. liner, 16 ga. front                       14 ga. liner, 14 ga. front

Enclosure Color (see Color Chart):  
 Prime (Standard)                       Ivory                       Bronze                       Gray  
 Beige                       White                       Dark Gray

#### Performance

Steam
Pressure: _____ psi
Entering Air Temp: _____ °F
Rating: _____ Btu/Hr

Hot Water
Avg. Water Temp.: _____ °F
Water Flow Rate: _____ GPM
Entering Air Temp: _____ °F
Rating: _____ Btu/Hr

#### Options

- Dampers**  
 None (Standard)                       Security Allen Key  
 Standard Knob
- Grill**  
 Louvered (Standard)                       Bar Grill - Aluminum (Inlet/Outlet)  
 Perforated (Inlet/Outlet)                       Arched Inlet/Louvered Outlet
- Fasteners**  
 Phillips (Standard)                       Spanner
- End Pockets**  
 Left Hand                       Right Hand                       Left & Right Hand
- Insulation**  
 None                       Back                       Sides, Back, & Top

Other: \_\_\_\_\_

**Model SF Slope-Top Floor Mounted**

**Access Doors**

- Available in any of the standard numbered locations illustrated.
- Doors are 6" high x 6" wide for convectors with a height of 20" or greater. 4" high x 5" wide for convectors with a height less than 20".
- Hinged on the top of the convector with a piano type hinge.
- Located in end pockets on convectors with end pockets.
- Fasten with cam-type locking device.


**Access Doors Location**

- 1     2
- 5     6



**Access Door Hardware**

- Slot Head (Standard)
- Security Allen Key Latch
- Security Spanner Head Latch

**Slope-Top Arched Inlet**

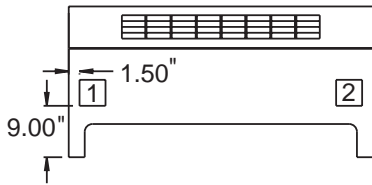

Door Location Dimensions



**Access Door Availability**

**LENGTH**  
32" or longer

**HEIGHT**  
18" or greater

ALL DEPTHS

**LENGTH**  
32" or longer

**HEIGHT**  
Less than 20"


ALL DEPTHS

**LENGTH**  
32" or longer

**HEIGHT**  
18" or greater

ALL DEPTHS

**Slope-Top Louvered Inlet**

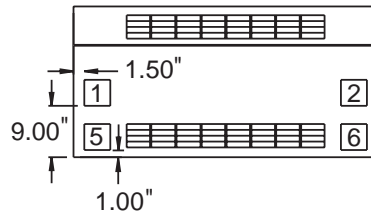

Door Location Dimensions

