



ARCTIC HELIX™ HIGH-TEMP (HT)

GEAR UP FOR THE COLD WITH THE INDUSTRY'S HIGHEST-PERFORMING HEAT DUCT.

Norseman's Arctic Helix HT portable heat ducts are made from advanced Fiberglass fabric with silicone coating on both sides, keeping the duct flexible in extreme cold. Finished with the industry's first stainless-steel collar, Helix HT guarantees a secure fit, eliminating any additional service time.



⚙️ SPECIFICATIONS:

- Manufactured with durable, flexible Fiberglass fabric with silicone coating on both sides, water, mold/mildew and fire resistant (FR), and odor-free.
- Durable FR Santoprene™ wear strip provides an additional layer of protection.
- Standard colors: Silver with yellow wear strip.
- Wire helix provides a strong structure, ensuring consistent airflow.
- Integrated compression straps assist with carrying and ensure compact storage.
- Passes FR testing to NFPA-701 and CAN/ULC-S109.



In stock, ready to ship from one of our distribution locations.

Norseman's Arctic Helix HT heat duct is **GEAR2PERFORM**.

NORSEMAN, YOUR ONE-STOP SUPPLIER OF **GEAR2PERFORM**.

- 🕒 **On-Demand Supply:** Warehousing space and distribution locations across North America.
- 🤝 **Exceptional Service:** One-stop supplier of Fabric, Foam and Film Protective solutions.
- 🏆 **Superior Quality:** Manufacturing in North America since 1921.
- 💡 **Extensive Experience:** Our Fiercely Reliable™ team will find a solution to fit your business.

Contact Norseman or your local Sales Representative to order today.



ARCTIC HELIX™ HIGH-TEMP (HT)

GEAR POINTS: Features specifically designed to ensure Norseman Gear outperforms on your next jobsite.

Deliver heat in the most extreme cold conditions.



PROTECT

Silicone-coated Fiberglass with FR Santoprene wear strip.



WITHSTAND

Horizontal or vertical airflow.




FIT

Stainless-steel pin-lock collar for a secure, rust-free connection.



PERFORM

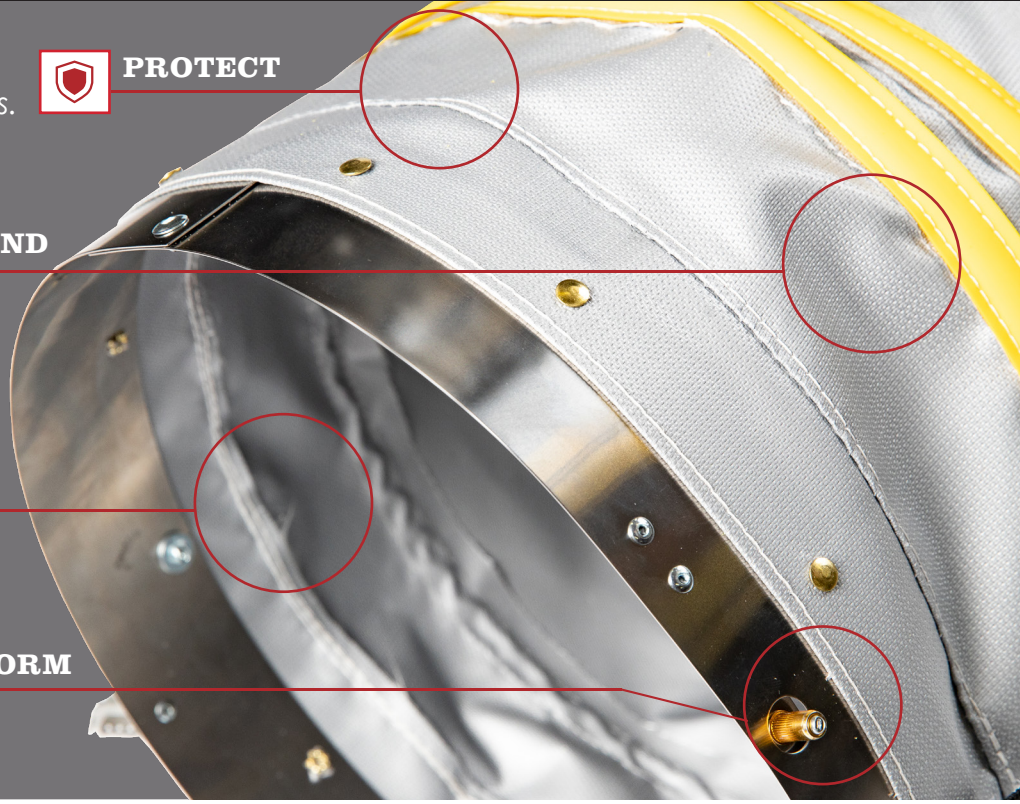

 **CONNECTION:**

- 12" duct: pin-lock and belted-cuff ends.
- 16" duct: belted-cuff and wire-ring ends.
- Used in both horizontal and vertical applications.
- Bidirectional—the duct can be connected from either end.
- Industry's first stainless-steel collar for a rust-free connection.

 **STANDARD SIZING:**

- 12" x 12'
- 12" x 25'
- 16" x 25'

 **TEMPERATURE RATING:**

-60°F to 500°F (-51°C to 260°C)

 **CUSTOMIZATION:**

Custom Options Available

ITEM NUMBER	COLLAR CONFIGURATION	DIAMETER	LENGTH
412087SS	Stainless Steel Pin-Lock	12"	12'
412088SS	Stainless Steel Pin-Lock	12"	25'
412089SS	Stainless Steel Pin-Lock	16"	25'

To learn more about Norseman and our gear, contact one of your local Norseman Sales Representatives or visit our website.

CANADA 1.800.268.1918 NORSEMAN.CA
USA 1.844.667.7362 NORSEMANUSA.COM