

Overview

V11 Series Three-Way Solenoid Air Valves are for use in applications where the operation of a pneumatically operated device is dependent upon an electrical circuit. The valves directly supply air to the pneumatic device when the coil is energized or de-energized, depending on the supply and exhaust air connections. All V11 Series valves are designed for use only as operating devices. Where system closure, improper flow, or loss of pressure due to valve failure can result in personal injury and/or loss of property, it is recommended that additional devices be added to indicate proper system operation, (for example, blade position indication on the damper blades in smoke damper applications).



Figure 1: V11 Series Three-Way Solenoid Valve with optional manual opener key.

Features and benefits

Positive air seal	No foreign material entering ports
Manual operation	Easier testing and checkout
Compact and lightweight	Fits in small spaces
360 mounting	Mountable in any position

Application

The valve is furnished for two-position action and has three identified connections: a normally open (N.O.) port with 1/8 in. FNPT connection, a normally closed (N.C.) port, and a common (COM) port with 1/4 in. barbed fittings. The ports in the die cast aluminum valve body have No. 60 mesh (217 micron openings) monel screens to stop foreign material from entering the valve ports to give positive air seal. In a typical application, supply air is connected to the normally closed port and the control device is connected to the common port. When the solenoid is energized, a magnetic field activates a plunger-type valve stem and supply air is directed to the control device. When the solenoid is de-energized, the supply air connection is closed and the normally open port exhausts air from the control device. Reverse action may be obtained by connecting the supply air to the normally open port, using the normally closed port for exhaust.

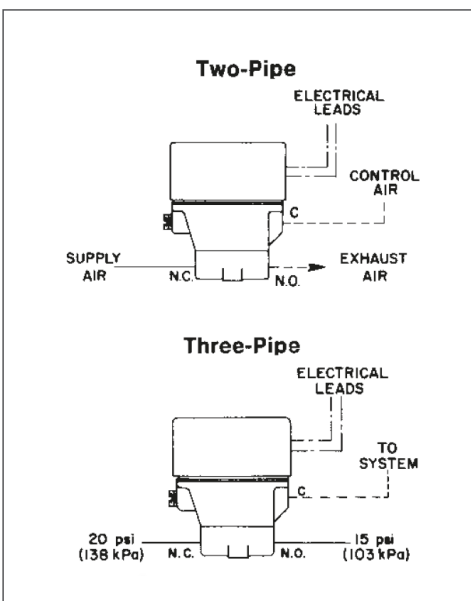


Figure 2: Dimensions

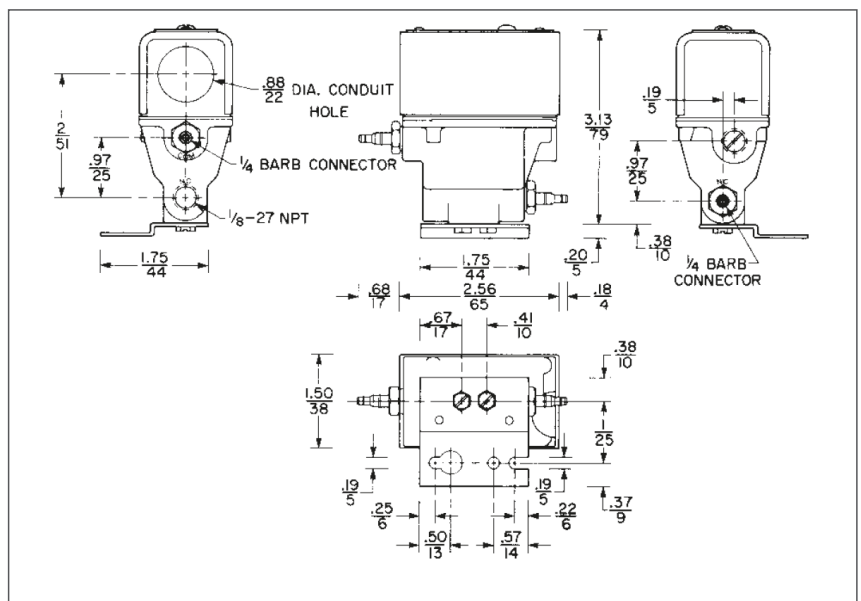


Figure 3: Typical application diagrams

Technical specifications

Product number	V11HAA-100	V11HAA-115	V11HBA-100	V11HCA-100	V11HDA-100	V11HFA-100	V11HGA-100(G)
Power	110/220 V, 50/60 Hz		220/240 V, 50/60 Hz	208 V, 50/60 Hz	440/480 V, 50/60 Hz	277 V, 50/60 Hz	24 V, 50/60 Hz
Temperature rating	60 C max			60 C max @ 60 Hz 55 C max @ 50 Hz	60 C max	60 C max @ 60 Hz 55 C max @ 50 Hz	
Ambient temperatures	AC models	Minimum 32° F (0° C) maximum 140° F (60° C)					
	DC models	Minimum 32° F (0° C) maximum 104° F (40° C)					
Conduit openings	7/8" diameter						
Finish	Valve body	Dull gray (iridate)					
	Cover and case	Gray baked enamel					
Material	Valve body	Die cast aluminum					
	Cover and case	Cold rolled steel					
Maximum pressure rating	30 PSIG (207 kPa)						
Operating pressure (all three ports)	0 to 20 PSIG (0 - 138 kPa)						
Packaging	Bulk pack normally supplied to OEMs. Individual pack available at extra cost.						
Power consumption	AC models	6 watts					
	24 VDC models	8 watts					
Pressure and flow ratings	15 PSIG (103 kPa) inlet and 0 PSIG (0kPa) outlet. The valve will pass 1.5 cfm (2592 SCIM) (0.71 l/s) of air from the common to the normally closed connections (when energized) or from the common to the normally open connection (when de-energized).						
Shipping weights	Bulk pack - 60 units per carton	55 lb (24.9 kg)					
	Individual pack - 56 units per carton	50 lb (22.7 kg)					
Wiring connections	18" wire leads						
Air connections	1/4" barb connections in common port and normally closed. Normally open port is 1/8" FNPT.						
Compliance	<p>United States: UL Listed, CCN YIOZ, File MH3536, to UL 429: Electrically Operated Valves.</p> <p>Canada: cUL Listed, CCN YIOZ7, File MH3536, to CAN/CSA-C22.2 No. 139: Electrically Operated Valves.</p> <p>Europe: CE Mark Johnson Controls declares that these products are in compliance with the essential requirements and other relevant provisions of the EMC Directive and Low Voltage Directive.</p> <p>Australia and New Zealand: RCM Mark, Australia/NZ Emissions Compliant</p>						



Product warranty

This product is covered by a limited warranty, details of which can be found at www.johnsoncontrols.com/buildingswarranty.

Patents

Patents: <https://jcpat.com>

Single point of contact

APAC JOHNSON CONTROLS C/O CONTROLS PRODUCT MANAGEMENT NO. 32 CHANGJIJANG RD NEW DISTRICT WUXI JIANGSU PROVINCE 214028 - CHINA	Europe JOHNSON CONTROLS WESTENDHOF 3 45143 ESSEN GERMANY	NA/SA JOHNSON CONTROLS 507 E MICHIGAN ST MILWAUKEE WI 53202 USA
--	---	--

Contact information

Contact your local branch office: www.johnsoncontrols.com/locations

Contact Johnson Controls: www.johnsoncontrols.com/contact-us



Building Technologies & Solutions

Headquarters: Milwaukee, Wisconsin, USA

Branch Offices: Principal Cities World-wide

© Copyright 2020 Johnson Controls.

All specifications and other information shown were current as of document revision and are subject to change without notice.