Low voltage transformer, encapsulated dry type, 1 phase, 1kVA, 240x480V primary, 120/240V secondary, Type 3R

1S1F

Product availability: Stock - Normally stocked in distribution

acility

Price\*: 813.00 USD

### Main

Product or Component Type	Dry Sealed Transformer
Primary to Secondary Voltage	240 x 480 V 120/240 V
Full Capacity Taps	0

#### Complementary

Enclosure Code	7A
Phase	1 phase
Power Rating	1 kVA
Temperature rise	115 °C
Height	8.13 in (206.50 mm)
Width	6.94 in (176.28 mm)
Depth	5.31 in (134.87 mm)
Enclosure mounting	Wall mounted
Product Weight	21.2 lb(US) (9.62 kg) 21.21 lb(US) (9.62 kg)
Enclosure Material	Painted sheet steel

## **Environment**

Enclosure Type	NEMA 3R
Insulation temperature	356 °F (180 °C)
Product Certifications	UL Listed cULus CSA

## Ordering and shipping details

Category	16277-RESIN LVGP XFMR
Discount Schedule	PE2
GTIN	785901019862
Returnability	Yes

<sup>\*</sup> Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.


Country of origin	MX
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.13 in (20.65 cm)
Package 1 Width	6.94 in (17.628 cm)
Package 1 Length	5.31 in (13.487 cm)
Package 1 Weight	24.77 lb(US) (11.236 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	44
Package 2 Height	40.00 in (101.6 cm)
Package 2 Width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)
Package 2 Weight	1090.00 lb(US) (494.415 kg)
Offer Sustainability	
Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile

# **Contractual warranty**

Warranty 18 months


**Dimensions Drawings** 


### **Approximate Dimensions**

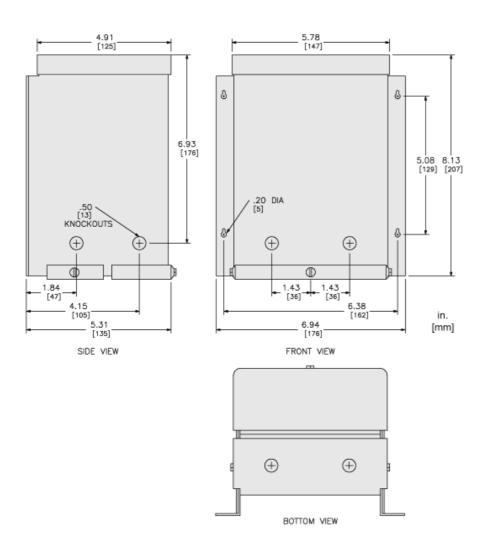

Connections and Schema

### **Connections and Wiring Diagrams**





600 VOLT PRIMARY

## Recommended replacement(s)