



AUXILIARY SWITCH BLOCK, 2 NO,  
DIN EN50005, LATERALLY,  
10 MM SCREW CONNECTION, SIZE S0...S12,  
FOR CONTACTORS FOR SWITCHING MOTORS,  
2-POLE

### Auxiliary circuit:

**Number of NC contacts / for auxiliary contacts**

- instantaneous switching

0

**Number of NO contacts / for auxiliary contacts**

- instantaneous switching

2

**Operating current / of the auxiliary contacts / at AC-15**

- at 230 V

A

6

### Installation/mounting/dimensions:

**Type of mounting**

snap-on mounting

### Connections:

**Design of the electrical connection**

- for auxiliary and control current circuit

screw-type terminals

### Certificates/approvals:

## General Product Approval

Functional Safety /  
Safety of  
Machinery

Declaration of  
Conformity



CCC



CSA



GOST



UL

[Type Examination](#)



EG-Konf.

## Test Certificates

[Special Test  
Certificate](#)

## Shipping Approval



ABS



BUREAU  
VERITAS



GL



LRS



RINA



RMRS

## other

[Environmental  
Confirmations](#)

## Further information:

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

### Cax online generator:



<http://www.siemens.com/cax>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RH1921-1EA20/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RH1921-1EA20](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1921-1EA20)

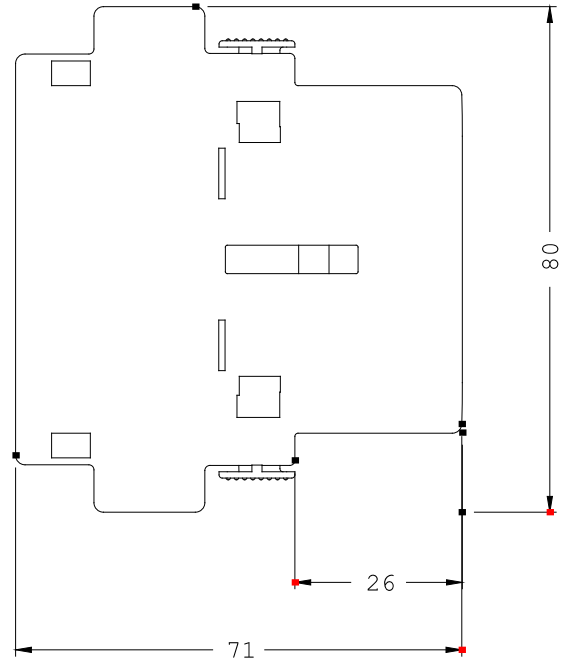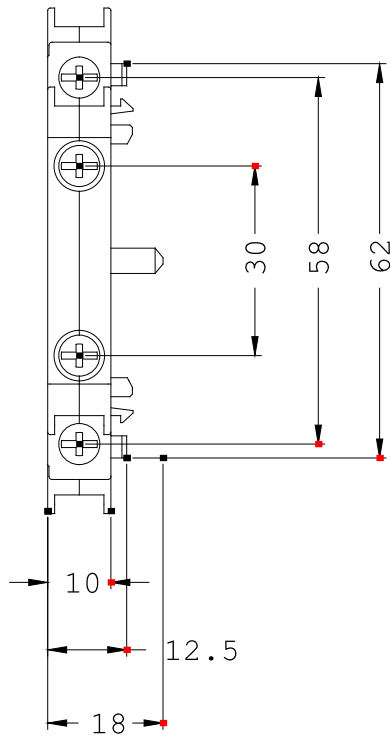

last change:

Dec 19, 2012