

# PORTACOOOL HAZARDOUS LOCATION™

EXTRAORDINARY COOLING FOR CHALLENGING ENVIRONMENTS




## FEATURES

- Spark resistant
- Molded in handles
- Liquid Level Indicator
- One piece housing
- Dual water fill
- Extra large drain
- All electrical components are sealed making them intrinsically safe



**ETL HAZARDOUS LOCATION,  
CLASS 1, DIVISION 2,  
GROUP C & D CERTIFIED**

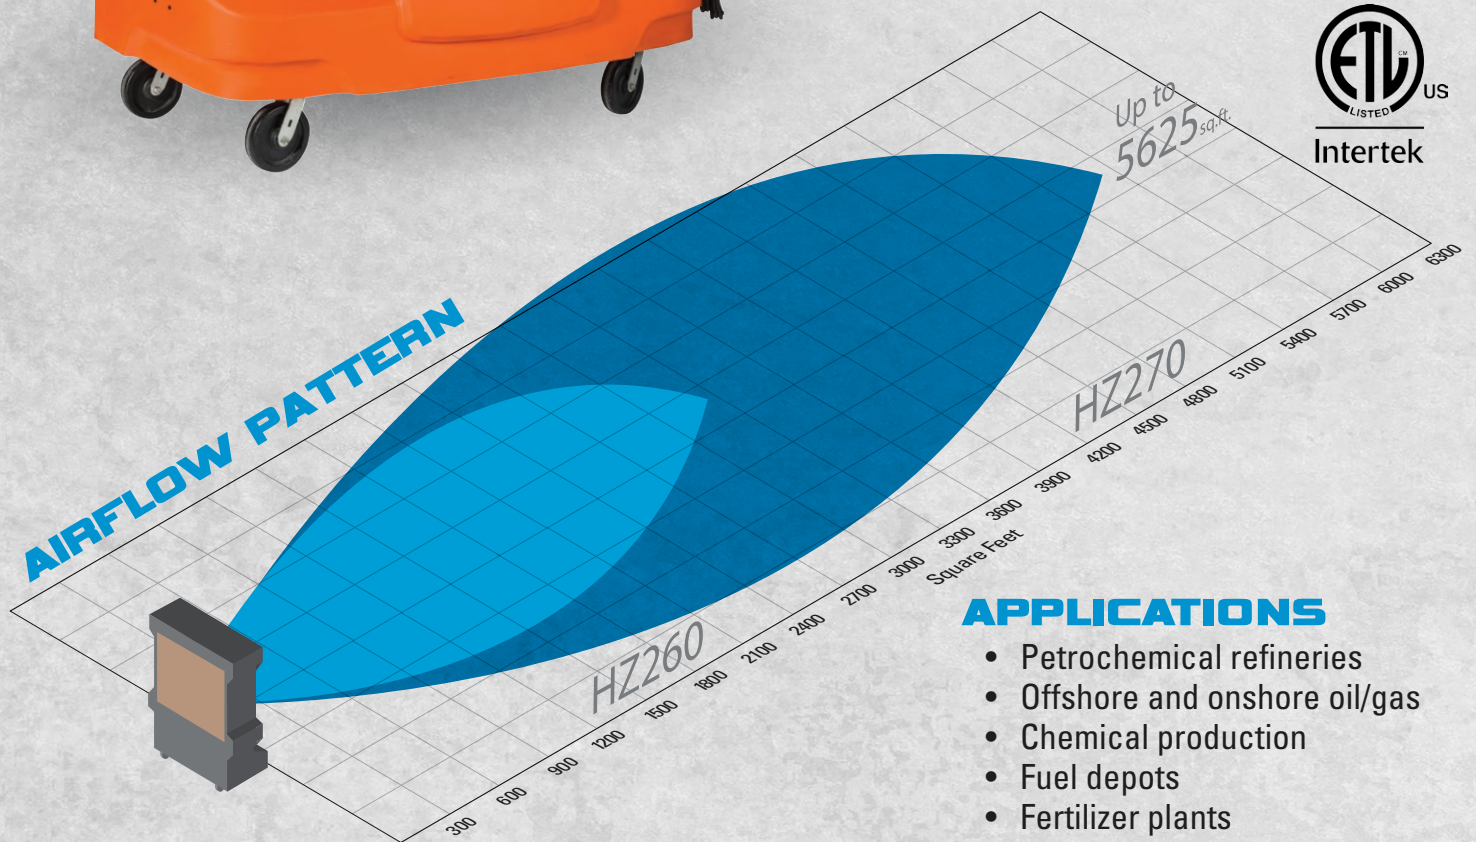

## APPLICATIONS

- Petrochemical refineries
- Offshore and onshore oil/gas
- Chemical production
- Fuel depots
- Fertilizer plants



# HAZARDOUS SERIES



## HAZARDOUS 270

Air delivery	22,500 CFM / 38,228 m <sup>3</sup> /hr
Velocity	20 mph / 32 kph
Amps	19.8
Speeds	One
Cooling capacity	5,625 s.f. / 523 m <sup>2</sup>
Water reservoir	65 G / 246 L
Dimensions (inches)	90 H x 77 W x 35 D
Dimensions (cm)	229 H x 196 W x 89 D
Weight	357 lb / 162 kg
Decibel level	High - 80 / Low - 58
Stock number	PACHZ270*
<b>Kuul Effect</b>	<b>38</b>

\*Standard 115v; Available in 220v

## HAZARDOUS 260

Air delivery	12,500 CFM / 21,238 m <sup>3</sup> /hr
Velocity	18 mph / 29 kph
Amps	14.8
Speeds	One
Cooling capacity	3,125 s.f. / 290 m <sup>2</sup>
Water reservoir	45 G / 170 L
Dimensions (inches)	78 H x 63 W x 29 D
Dimensions (cm)	198 H x 160 W x 74 D
Weight	302 lb / 137 kg
Decibel level	High - 78 / Low - 65
Stock number	PACHZ260*
<b>Kuul Effect</b>	<b>25</b>



\*Standard 115v; Available in 220v

