


## QCH SERIES

### CEILING-MOUNTED FAN-FORCED HEATER

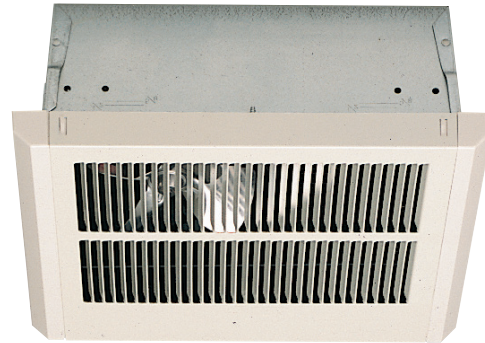

#### IDEAL SPACES

- Basements
- Offices
- Converted Attics
- Bathrooms
- Workshops
- Lobbies
- Hallways
- Common Areas

#### COLORS

- Northern White

#### DIMENSIONS

- GRILLE | 10-1/2" L x 12-1/2" W x 1" D
- BACK BOX | 9-3/4" L x 11" W x 3-3/4" D

#### TEMP RANGE

- 45°-95° F

#### CFM

- 65

- Dual voltage and wattage
- Built-in power on/off switch
- Thermal cutout to shut off heater in case of overheating
- Easy installation with a three-piece design
- Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- Recessed or surface installation options available
- Remote wall thermostat required



## QCH SERIES CEILING-MOUNTED FAN-FORCED HEATER

### MODELS & SPECIFICATIONS

CATALOG NO.	UPC	VOLTS	WATTS	AMPS	SHIP WT. (LBS.)
QCH1101F	6 85360 16502 8	120	1000	8.3	10
			500	4.7	
QCH1151F	6 85360 16503 5	120	1500	12.5	
			750	6.3	
QCH1202F	6 85360 16504 2	240/208	2000/1500	8.3/7.2	
			1000/750	4.2/3.6	
QCH1207F	6 85360 16505 9	277/240	2000/1500	7.2/6.3	
			1000/750	3.6/3.1	

NOTE: Factory-wired for highest wattage, field-convertible to lower wattages.

### ACCESSORIES (OPTIONAL)

CATALOG NUMBER	UPC	DESCRIPTION	SHIP WT. (LBS.)
QCHSM	6 85360 05872 6	Surface mounting sleeve, Northern White	2
QCHS1	6 85360 05873 3	1" Semi-Recessed Frame, Northern White	
QCHS2	6 85360 05874 0	2" Semi-Recessed Frame, Northern White	
QCHTBF	6 85360 08738 2	T-Bar Frame Kit	5

NOTE: Requires two separate leads from heater to single-pole wall thermostat.

