

AUTOMATIC WALL SHUTTER MODEL EASB & EASW

P: 800.961.7370 www.solerpalau-usa.com

FEATURES

Frame


- .080 extruded aluminum painted black or white
- Staked corners provide rigidity and durability.
- Integrated weather stripping incorporated into frame for additional strength and weather protection.
- Prepunched oblong mounting holes.

Ratings

- Maximum recommended velocity is 1,500 FPM
- Temperature -40 F to 180 F

Blades

- 3" wide black or white PVC blades
- Yellow zinc dichromate rods connect blades for uniform opening and closing
- Opens freely to allow full 90 degree opening and closing

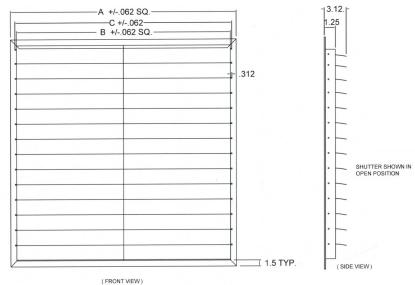

Dimensions in Inches

Part No.	Overall (A) Frame Dimensions (W x H)	Inside (B) Frame Dimensions (W x H)	Required (C) Hole Opening (W x H)	# of Panels	Est. Shipping Weight (Ibs)
EASB36	39 x 39	35.87 x 35.87	36.5 x 36.5	2	12
EASB39	42 x 42	38.87 x 38.87	39.5 x 39.5	2	13.5
EASB51	54 x 54	50.87 x 50.87	51.5 x 51.5	3	19.5
EASB54	57 x 57	53.87 x 53.87	54.5 x 54.5	3	28
EASW36	39 x 39	35.87 x 35.87	36.5 x 36.5	2	12
EASW39	42 x 42	38.87 x 38.87	39.5 x 39.5	2	13.5
EASW51	54 x 54	50.87 x 50.87	51.5 x 51.5	3	19.5
EASW54	57 x 57	53.87 x 53.87	54.5 x 54.5	3	28

Note: Dimension are approximate due to normal tolerances in the manufacturing process.

