
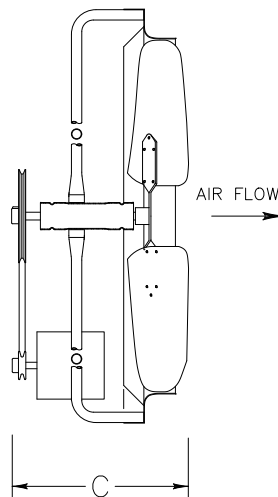


Diameter	HP	CFM 0.0 SP	0.125 SP	0.25 SP	Approximate Weight	1-Phase		3 - Phase
						Open Drip Proof Motor 115V	Totally Enclosed Motor 115/230V	Open Drip Proof Motor 230/460V
24"	1/3	3,920	2,070	930	53	V2412-V		
30"	1/3	6,420	4,980	1,790	55	V3012-V		
	1/2	9,560	7,770	4,850	68	V3013-V	V3013T-U	V3013-X
36"	1/2	10,900	9,160	4,310	71	V3613-V	V3613T-U	V3613-X
	3/4	12,100	10,400	5,000	77	V3614-U*		V3614-X
42"	1/2	14,200	11,600	5,470	90	V4213-V	V4213T-U	V4213-X
	3/4	15,900	12,300	5,900	97	V4214-U*		V4214-X
48"	1/2	17,100	11,500	3,900	106	V4813-V	V4813T-U	V4813-X
	3/4	18,100	13,800	6,370	110	V4814-U*		V4814-X

\*All weights are approximate and measured in pounds

\*Dual Voltage, single phase and prewired 115v

Dimensions "V" Series			
Diameter	A	B	C
24"	30"	30"	16 1/4"
30"	34"	34"	16 1/4"
36"	40"	40"	16 1/4"
42"	46"	46"	16 1/4"
48"	52"	52"	16 1/4"

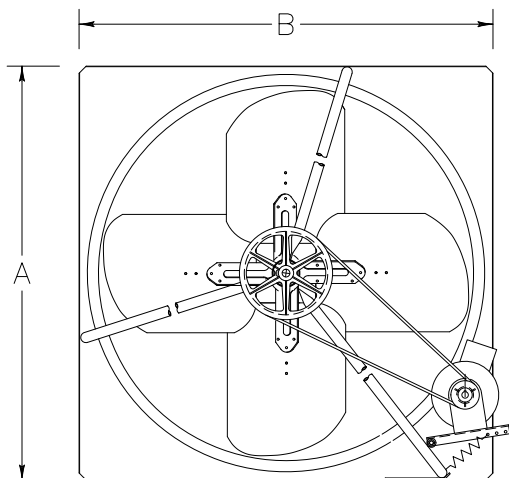

Performance shown is for installation type A: free inlet and free outlet and does not include the effects of accessories

**EXHAUST AND SUPPLY FANS: THE V SERIES**

501-982-7558 ▶ TriangleFans.com

