

MZR™

Motorized Zone Registers

MZR-XXXX

The MZR, Motorized Zone Register, is a low-cost, rugged motorized register designed to work with most forced air zone control systems. It can also be used as a stand-alone register with a wall mounted thermostat to eliminate over-heating or over-cooling in bonus rooms, sun rooms, guest rooms and basements. The MZR is the perfect solution when you are unable to install zone dampers.



Features and Benefits:

- Low cost
- Easy to install
- Works with most forced air zone control systems
- Allows zoning to be installed in almost any application
- Can be used in floor and ceiling applications
- Designed to fit most register boots
- Available in tan or white


Warranty: 5 years

Specifications:

Operating Voltage	24VAC
Amperage	0.26A
VA Rating	10VA
Configuration	PC/SO or PO/SC
May require plenum-rated wire	

Dimensions	Color
4" x 10"	Tan and White
4" x 12"	Tan and White
4" x 14"	Tan and White
6" x 10"	White
6" x 12"	White

MZR MOTORIZED ZONE REGISTER USED WITH ZONE CONTROL PANEL

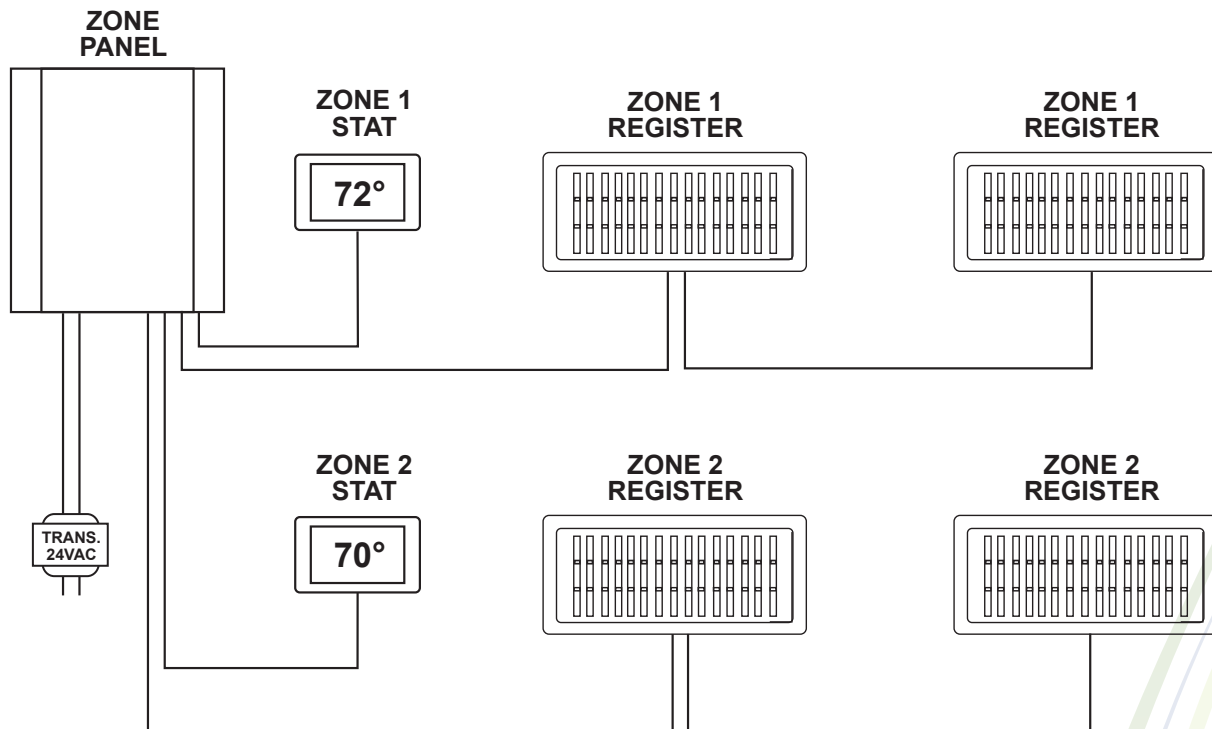

Up to six registers may be connected to a single zone

WIRING SUGGESTIONS

The most common method used to run wire inside the duct work are as follows:

1. Drill a hole in the register boot and run the wire in a conventional manner.
2. Use a fish tape to pull the wire through the duct.
3. Use a duct cleaning vacuum machine to draw a plastic bag with an attached line to pull wire through the duct.

If wiring from actuator is run inside the duct work, plenum rated wire must be used.