

# P Serie

**Restaurant Patio Tube Heater** 



### **Extend your patio season and** increase your seating capacity!

Infrasave's restaurant patio heaters provide the perfect comfort for your customers and increases your revenue by having more tables open during colder seasons.

The infrared radiant tube heater design of the **IWP Series** offers customers an efficient heavy duty outdoor heater that is economical yet ideal for outdoor patio applications.

**Experience Counts:** Infrasave is the worldwide market leader and most trusted brand with over 2 million heating appliances sold.



## **Features**

Whisper-Jet technology for silent operation

Overhead mounting leaves more space for seating and keeps aisles clear

Corrosion & moisture resistant to ensure longevity of the heater

Structural gas supply eliminates portable propane tanks, making the patio more efficient on your gas bill and safer for customers

Low clearances and hanging heights to easily mount to any patio structure and design

Optional Accessories See back for more details.

Patio Remote Control PatioPanel Tuxedo Grille


Also Available in pre-assembled U-Tube **P40** model


Contact us today for a FREE design and quote!

### **IWP Series - Technical Specifications & Optional Accessories**

Information below is intended only as a reference and should not be used when installing equipment. Please ensure you locate the most recent instruction manual for accurate and up to date information.

#### Clearances to Combustibles

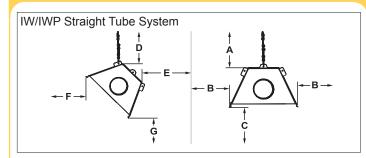

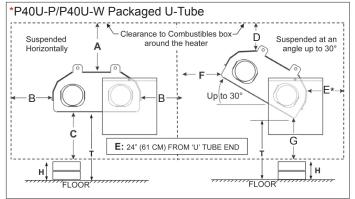

MODELS	SUSPENDED AT AN ANGLE				SUSPENDED		
	UP TO 45°			HORIZONTALLY			
	D	E	F	G	Α	В	С
IW/IWP 200	13"	6"	74"	70"	14"	44"	76"
IW/IWP 175	12"	6"	72"	68"	13"	42"	74"
IW/IWP 155	5.5"	1"	44"	64"	3.5"	19"	64"
IW/IWP 130	4.5"	1"	35"	60"	3.3"	11"	60"
IW/IWP 110	3.5"	1"	26"	54"	2"	10"	54"
IW/IWP 80	3"	1"	23"	38"	1.75"	6"	38"
IW/IWP 60	2.5"	1"	17"	34"	1.5"	5.5"	34"
IW/IWP 45	2.75"	1"	24"	32"	2.25"	7"	32"
P40U-IP/P40U-IW*	12"	12"	36"	55"	12"	24"	55"


#### Optional Accessories


	NEMA 4X Rated Thermostat	JS-0570-XX	
	4" Horizontal flue vent terminal (wall)	JA-0528-XX	
ľ	90° Elbow kit with reflector cap (Combine with two 90° to create 180° elbow)	JS-0508-JZ	
	#2 Lion chain	JL-0800-XX	
	Tuxedo Grille – Matte Black 10 ft. Kit (Straight Tubes Only)	TG-0010-XX	
	Protective Guard Screen (P40U-P & P40-W Only)	JS-0502-UR-GK	

Consult your local authorized dealer for other Infrasave accessories:

- Line-voltage and 24V thermostat and controls
- Side reflector extensions

#### **Dimensions and Specifications**

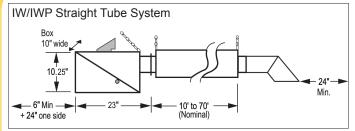

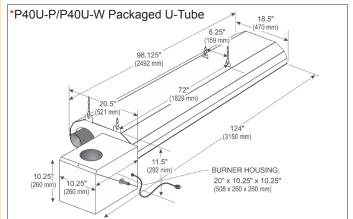

MODEL	INPUT (BTU/ HR) U.S.A.* SEA LEVEL TO 2,000' CANADA*: SEA LEVEL TO 4,500'	HEATER LENGTH						
		10'	20'	30'	40'	50'	60'	70'
IW/IWP 200	200,000					•	-	-
IW/IWP 175	175,000					•	-	
IW/IWP 155	150,000					•	-	
IW/IWP 130	130,000			-		•		
IW/IWP 110	110,000			-		•		
IW/IWP 80	80,000			-				
IW/IWP 60	60,000		-	-				
IW/IWP 45	45,000							
P40U-IP/P40U-IW*	40,000	•						
HEATER LENGTH		10'4"	21'7"	31'3"	40'11"	50'7"	60'3"	69'11"
SHIPPING WEIGHT	100	150	200	240	315	360	430	

\* HIGH ALTITUDE: De-rate heater 4% for each additional 1,000 ft. of elevation

Gas Pressure	Line Minimum:	5" W.C. NG	11" W.C. LP			
	Line Maximum:	14" W.C. NG	14" W.C. LP			
	Manifold	3.5" W.C. NG	10" W.C. LP			
Gas Inlet	1/2"					
Flue & Air Vent	4"					
Electrical	120V, 60 Hz, 1.5 AMPS					

#### Additional resources:











Replacement Parts List

P40U-IW Manual

Find a Distributor

Distributor info:





























