



PSPT Series

PRESSURE TRANSDUCER REFERENCE GUIDE
SD-362 / 22019




Pressure Transducer Nomenclature


EXAMPLE:

PSPT	0150	S	V	S	P	-	S
PARKER SPORLAN PRESSURE TRANSDUCER	RANGE	TYPE	SIGNAL	HARDWARE	CONNECTOR	CABLE	MATERIAL
	0000 = NA	0 = NA	0 = NA	C = Cable	P = Packard	-- = None	Blank = None
	0150 = 0-150	S = Sealed	V = .5 -to 4.5 VR	S = 1/4" SAE		20 = 2 m	S = Stainless
	0300 = 0-300	G = Gauge		N = 1/8" NPT		50 = 5 m	B = Brass
	0500 = 0-500	A = Absolute					
	0652 = 0-652						
	2000 = 0-2000						

Dimensions

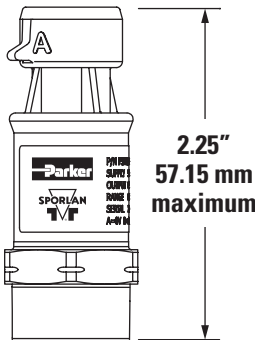

PRESSURE TRANSDUCER

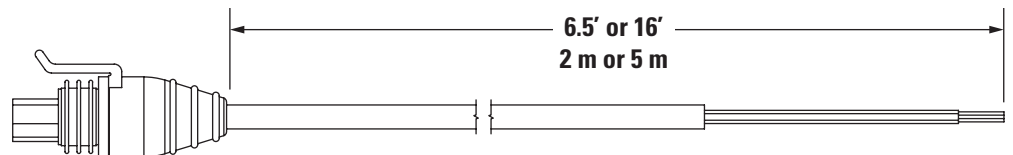

TRANSDUCER CABLE

PARKER SPORLAN PRESSURE TRANSDUCERS (Partial List)			
DESCRIPTION	ITEM	NOTES	LABEL COLOR
PSPT0150AVSP-B	953291	0-150 psia (10 bar) transducer	Multi-Color
PSPT0150SVSP-S	952572	0-150 psis (10 bar) transducer (all other refrigerants)	Green
PSPT0300SVSP-S	952574	0-300 psis (21 bar) transducer (R410A)	Silver
PSPT0500SVSP-S	952576	0-500 psis (34 bar) transducer (R744)	Yellow
PSPT0652SVSP-S	952579	0-652 psis (45 bar) transducer	Pink
TRANSDUCER CABLES			
DESCRIPTION	ITEM	NOTES	
PSPT000000CP20	953192	6.5' (2 meter) cable	
PSPT000000CP50	953100	16' (5 meter) cable	

